
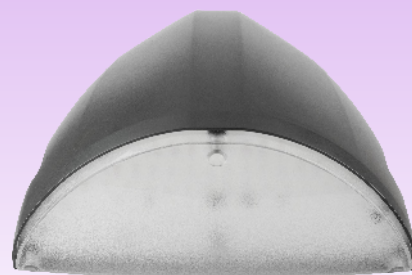


LED LITE™
Energy Saving LED

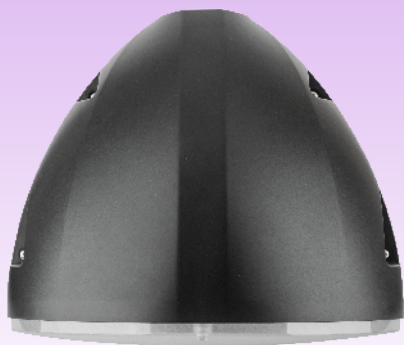


LTWP18CCT

18W LED Wall Pack IP65 CCT and Multi Power - Black Polycarbonate

This 18W LED Wall Pack offers unmatched versatility and performance, making it an excellent choice for a wide range of applications. It features CCT adjustability, allowing you to select the perfect colour temperature to suit your environment, and multi-wattage capability for tailored energy usage. With a high efficacy of 150lm/W, it ensures maximum brightness with minimal power consumption.

Designed for convenience, a quick plug-in emergency pack is available for seamless operation during power outages and a quick plug-in photocell for automatic dusk-to-dawn functionality (both sold separately). Ideal for outdoor and perimeter lighting, this durable and energy-efficient solution guarantees optimal performance, enhanced safety, and significant energy savings.

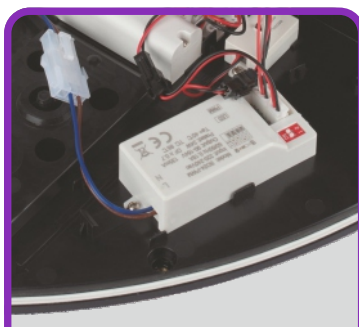

CCT Changeable - 3000K/4000K/6500K
Multi Wattages - 9W/12W/15W/18W



Back and Two Side Conduit
Cable Entries




Push Fit Terminal Block

Features & Benefits:

- Multi Wattages: 9W/12W/15W/18W
- CCT Changeable – 3000K/4000K/6500K
- High Efficacy >150lm/W
- Up to 2700lm
- IP65 Rated
- Back and two side conduit cable entries
- Besa Box compatible
- Push fit terminal block
- Quick Plug-in & screwless emergency pack (LTEM) and Photocell (LTWPPC) - sold separately
- Corrosion Proof
- High-Strength Polycarbonate Base & Diffuser
- Wide beam angle and no glare
- Evenly diffused light output
- Resistant to shock and vibration
- 5 year warranty

35% Energy Saving
50,000 Hour LED Lamp Life

Dimensions(mm):

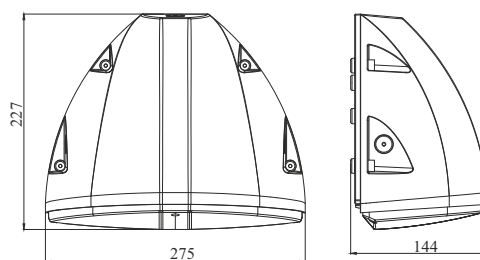

Technical Specifications:

Input Voltage:	220-240 V/AC,50-60Hz	Efficacy:	>150lm/W (4000K)
Power:	18/15/12/9W Switchable	CRI:	>80
LEDs:	SMD 2835	IP Rating:	IP65
CCT Changeable:	3000K/4000K/6500K	Protection Class:	Class II
Light Output:	1300lm - 2700lm	Housing:	Polycarbonate
DF (Dissipation factor):	>0.7	Operating Temp.:	-15°C to +40°C
Ripple Current:	<10%	Dimmable:	No
Dimensions:	275*227*144mm	Warranty:	5 Years



Non-replaceable
light source




Non-replaceable
control gear




High-Strength Polycarbonate Base & Diffuser

- Wide Beam Angle and No Glare
- Evenly Diffused Light Output

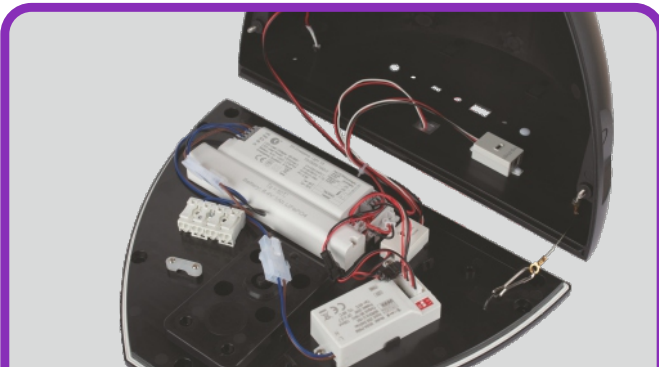

Quick Plug-in & Screwless Emergency Pack (LTEM) and Photocell (LTWPPC)

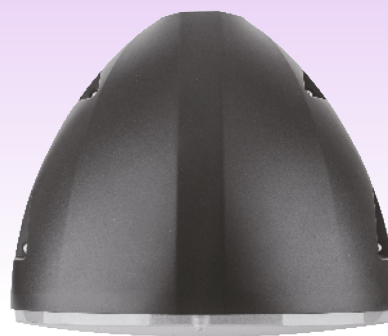

CCT

3000K/4000K
6500K

UP TO
2700
LUMEN

WATT

9W/12W
15W/18W



-15°C +40°C

AC

220V/240V

CRI


>80

IP65 RATED


CCT & Power Adjustable:



Switch off the mains supply before changing power or CCT

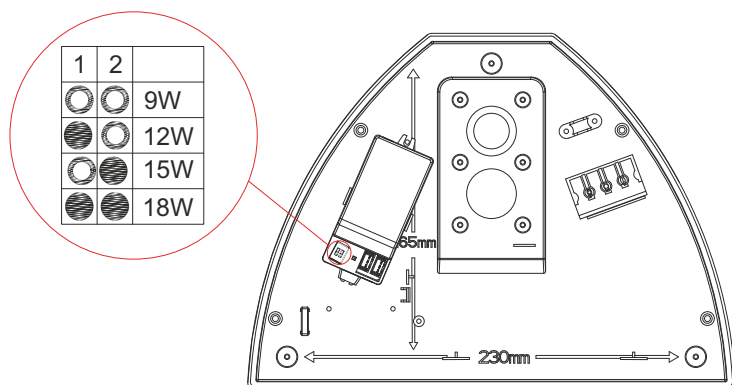

Open the LED gear tray and use the driver DIP switch to change the power

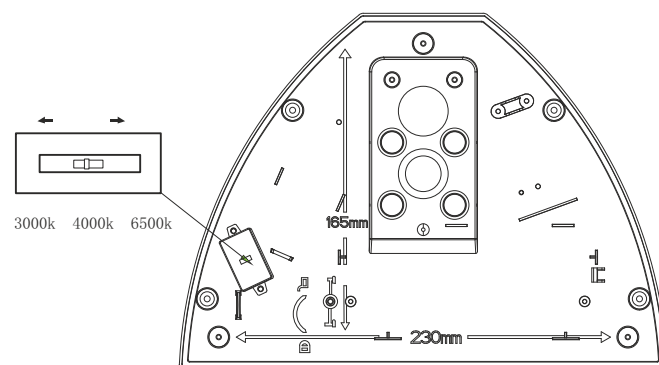

Use the Switch box to change the CCT temperature