

RTWPLED4

4ft 36W LED Non Corrosive
Weatherproof Fitting - IP65

IP65  220-240V

Please read these instructions and retain them for future reference.

Important information


It is recommended that the fittings are installed by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control.

- These products are designed for connection to a 220-240V mains supply.
- We cannot accept responsibility for any claims arising from a poor installation.

Important User Advice

- Always switch off mains supply before installation.
- The fitting is suitable for indoor and outdoor use.
- The installation must not infringe on water pipes or any other electrical services.
- The light fitting is Class II and does not require an earth connection.

Dimensions:

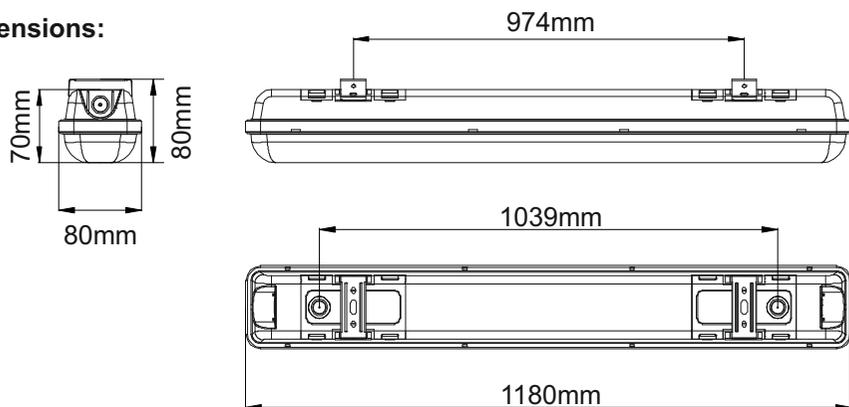

Specifications:

- Voltage Range: 220-240V
- Nom. Watts: 36W
- Lumen Output: 3200lm
- Colour Temp.: 5000K
- IP Rating: IP65
- Warranty: 3 Years
- ABS Base
- Stainless Steel Clips
- Not Dimmable

Package Includes:


- Snap-in Metal clips x 2pcs.
- Plastic Wall Plugs x 4pcs.
- Screws x 4pcs.



Installation:  **Warning!** Switch off the power source before installation & maintenance

Step 1: Identify the location and direction of any hidden supply cables or service pipes before drilling fixing holes.

Step 2: Mark and drill mounting holes for the snap-in ceiling clips at the correct spacing - see minimum/maximum spacing (Fig.1).

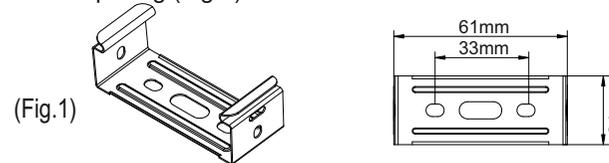


Step 3: Fix the clips securely to the ceiling (A)

Step 4: Open the cover for the connection block and wire the main input to the terminal block of the light fitting (B). For detailed wiring instructions see Fig. 2.

Step 5: Close the connection box cover (C) and mount the light fitting onto the metal clips ensuring that it is secured into place (D)

Step 6: Power up the fitting to check that it functions correctly


Installation*

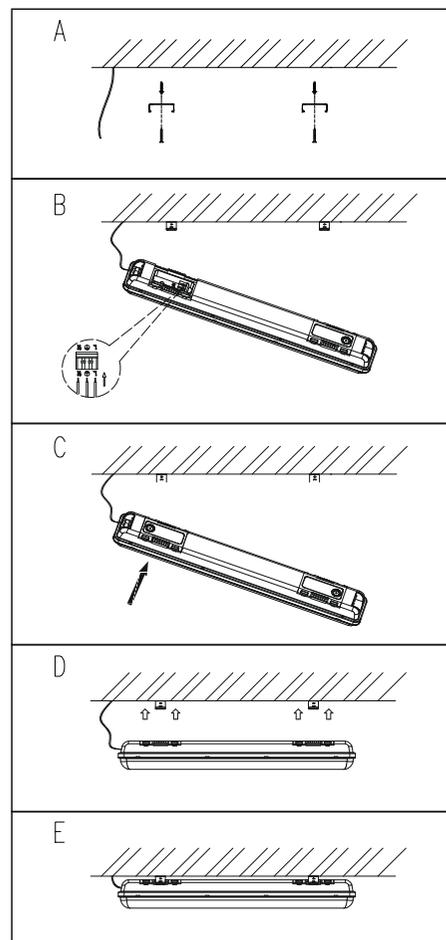


The fitting comes with both waterproof cable glands installed, one side has a silicone cover to ensure the IP65 rating. In order to utilize both connections, remove the blanking plate by unscrewing the cover.

(Fig.2)

Wiring Instructions



POWER SUPPLY

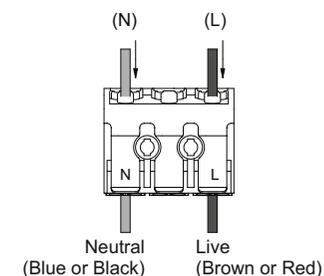

LIGHT FITTING

 **This is a sealed fitting and must not be opened!**

Opening this fitting will void the warranty!

*Can also be suspended with traditional hooks & Jack chain. Not supplied.