


LED LITE™
Energy Saving LED

ECO LED Floodlights

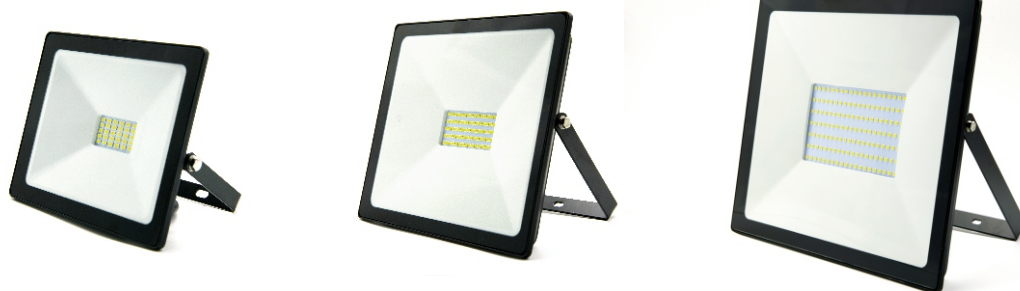

The ECO LED Floodlight series stands out for its compact design and minimalist finish. The ECO Floodlights are small and have a modern and functional design. The light is distributed over a 120° angle and is perfect for lighting in all sorts of settings, offering considerable energy savings.

They are designed for lighting outdoor areas and have IP65 Protection. They are made of high quality die-cast aluminium, which can contribute to efficiently eliminating heat that is generated.

Applications include: Balconies, Terraces and Gardens, Security Lighting, Porch Lighting and Area Floodlighting, Factories, Offices

Features:

- Voltage Range: 220-240V
- Beam Angle: 120°
- IP65
- Warranty: 2 Years
- CRI > 80
- Power Factor > 0.9
- Class I, requires earth connection
- Optional Garden Spike (not included)
- Shatter Resistant Tempered Glass
- Not Dimmable
- Adjustable Bracket
- Pre wired with 60cm rubberised cable

Specifications:

Model	Power	Voltage	CCT	Lumens	Beam Angle	Dimensions
LTEF10WW	10W	220-240V/AC	3000k	850lm	120°	90*25*70mm
LTEF30WW	30W	220-240V/AC	3000k	2500lm	120°	170*28*150mm
LTEF50WW	50W	220-240V/AC	3000k	4500lm	120°	210*30*180mm
LTEF100WW	100W	220-240V/AC	3000k	8300lm	120°	280*35*250mm

