



LTFL10

10W 3-CCT Selectable Floodlight

The 10W 3-CCT Selectable LED Floodlight delivers high efficiency and flexibility with switchable colour temperatures (3000K / 4000K / 6000K) to suit any application. Designed for reliable performance and durability, it provides bright and consistent illumination for outdoor areas, gardens, driveways, and general-purpose lighting needs.




Applications:

- Gardens & driveways
- Building facades
- Parking areas
- Commercial outdoor lighting

Features & Benefits:

- **3 x CCT Selectable** (3000K / 4000K / 6000K)
- **100 lm/W Efficiency**
- **IP65 Rated** – Weather Resistant
- **CRI>80**
- **Class I** - Requires earth connection.
- **Material:** Die cast Aluminium body with tempered glass diffuser
- **Slim, Durable Design**
- **Slide-in Bracket** for quick and easy installation
- **Additional round bracket**
- **Colour Temperature Switch:** Accessible at the bottom panel of the floodlight for easy on-site adjustment.

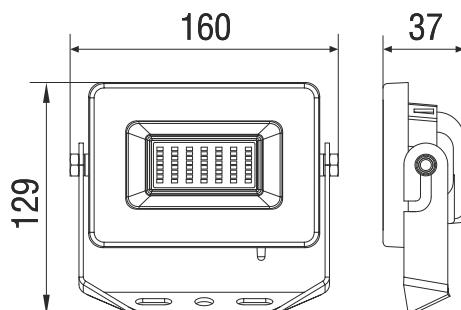

Dimensions(mm):



Technical Specifications:

Input Voltage:	220-240 V/AC	IP Rating:	IP 65
Power output:	10W	Protection Class:	Class I
Luminous Efficacy:	>100 lm/W	Dimensions:	160 x 29 x 37mm
Lumen Output:	1000±5%lm	Housing Material:	Aluminium
CCT Options:	3000K±250K	Reflector:	Metal
	4000K±250K	Ambient Temp.:	-20°C to +40°C
	6000K±250K	Switch:	CCT changeable
Beam Angle:	>75°	Finish:	Black
Colour Rendering(CRI):	>80	Warranty:	3 years