



LTFL235

20W/30W/50W 3-CCT Selectable Multi Power LED Floodlight


The 20W/30W/50W 3-CCT & Multi-Power Selectable LED Floodlight delivers both flexibility and efficiency, allowing users to adjust colour temperature (3000K / 4000K / 6000K) and power output to suit different applications. Built for durability and reliable performance, it provides consistent illumination for outdoor spaces, driveways, gardens, and general-purpose lighting.

Applications:

- Gardens & driveways
- Building facades
- Parking areas
- Commercial outdoor lighting

Features & Benefits:

- **3 x CCT Selectable** (3000K / 4000K / 6000K)
- **Multi Power:** 20W / 30W / 50W (Switchable)
- **100 lm/W Efficiency**
- **IP65 Rated** – Weather Resistant
- **CRI>80**
- **Class I** - Requires earth connection.
- **Material:** Die cast Aluminium body with tempered glass diffuser
- **Slim, Durable Design**
- **Slide-in Bracket** for quick and easy installation
- **Additional round bracket**
- **Colour Temperature Switch & Power Switch:** Accessible at the bottom panel of the floodlight for easy on-site adjustment

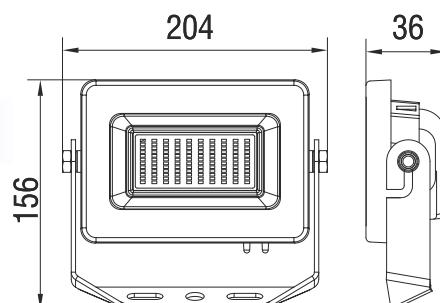

Dimensions(mm):



Technical Specifications:

Input Voltage:	220-240 V/AC	IP Rating:	IP 65
Power output:	20W/30W/50W Switchable	Protection Class:	Class I
Luminous Efficacy:	>100 lm/W	Dimensions:	204 x 36 x 156mm
Lumen Output:	up to 5000±5%lm	Housing Material:	Aluminium
CCT Options:	3000K±250K	Reflector:	Metal
	4000K±250K	Ambient Temp.:	-20°C to +40°C
	6000K±250K	Switch:	CCT & Power
Beam Angle:	>95°	Finish:	Black
CRI(Ra):	>80	Warranty:	3 years