

LED LITE™

Energy Saving LED




AC Direct LED LoPro9 Light

Decorative surface mounting LED downlight luminaire comprising of aluminium housing with transparent lens & AC direct LED chip. Ideal for domestic or commercial dwellings with concrete or solid ceilings.



Dimensions:

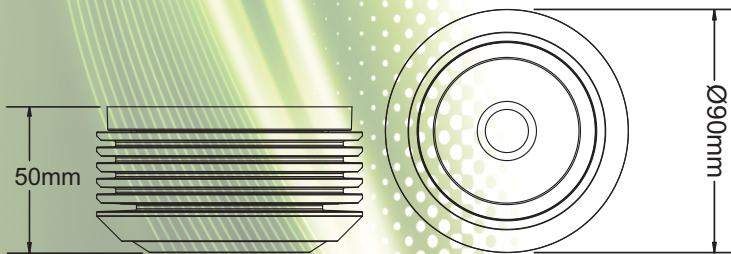

Key specifications:

- Voltage Range: 220-240V/AC
- Frequency: 50/60Hz
- LED Type: COB LED
- Housing: Aluminium Alloy & PC Lens
- Body finish: Silver & White
- Rated Load: 9W
- Lumen Output: 765± lumens
- Beam Angle: 120°
- Colour: Warm White, Cool White, Daylight
- Power Factor > 0.90
- CRI > 80
- IP Rating: IP44
- Dimmable
- Long Life - 3 year guarantee

Exploded View:

