
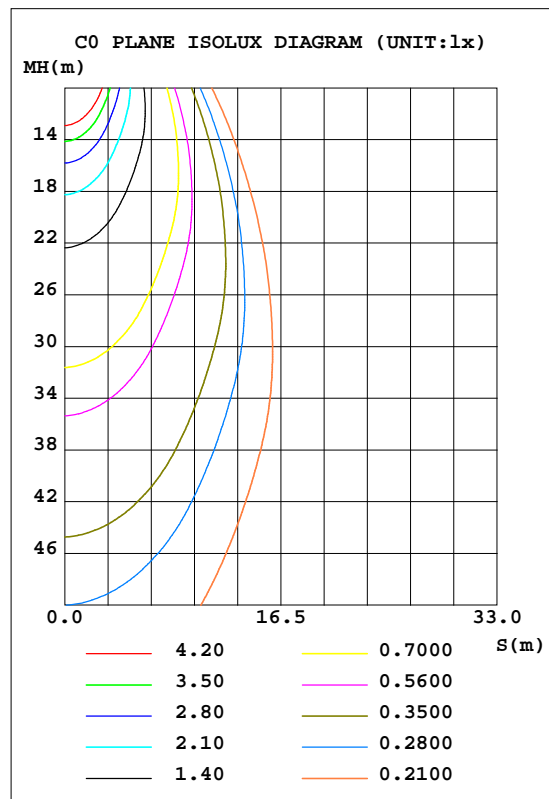


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm		
NAME: LTMTC6W - 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Ledlite	SUR.:0.000962	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.81 lm/W			
MODEL	5RS051-1(1)4000K	I _{max} (cd)	701.1	S/MH(C0/180)	0.70
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	0.71
RATED VOLTAGE(V)	232	TOTAL FLUX(lm)	610.67	h UP, DN(C0-180)	0.0, 50.3
NOMINAL FLUX(lm)	610.674	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0, 49.7
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	231.4	h down(%)	100.0	CIBSE SHR MAX	0.80

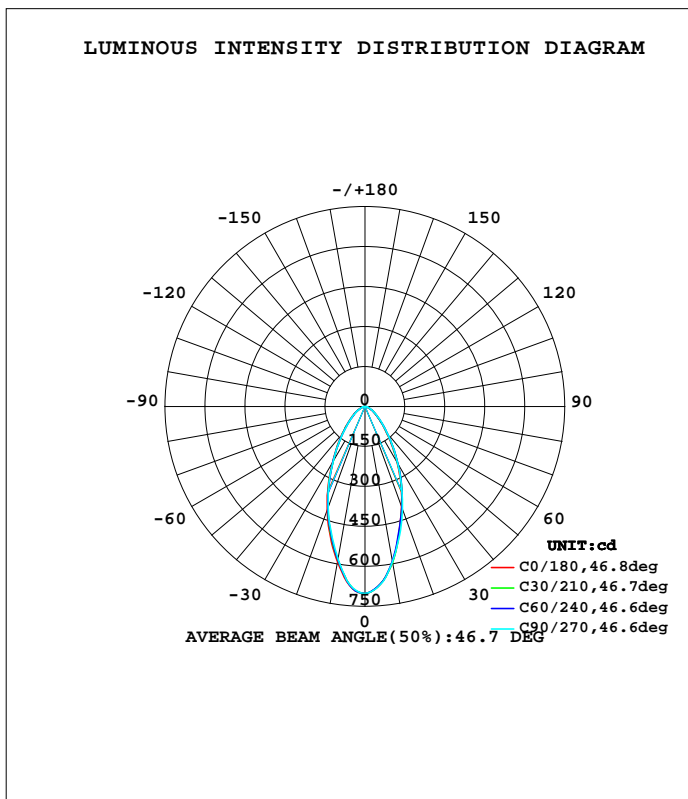

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	593.5	592.1	593.5	594.7	593.9	586.0	581.9	588.7	0- 10	61.37	61.37	10.1,10.1
20	401.0	405.3	411.4	416.1	415.1	407.8	404.8	407.5	10- 20	138.5	199.9	32.7,32.7
30	241.1	249.4	246.3	247.7	246.8	241.3	241.9	244.8	20- 30	148.0	347.9	57,57
40	124.4	130.1	130.4	131.4	132.8	128.3	126.7	125.0	30- 40	112.9	460.8	75.5,75.5
50	63.79	65.09	67.50	67.52	69.61	66.03	64.64	62.03	40- 50	71.88	532.7	87.2,87.2
60	33.34	33.49	35.24	34.96	35.98	34.02	33.49	32.20	50- 60	43.00	575.7	94.3,94.3
70	12.92	14.42	15.32	14.80	15.07	14.23	14.25	14.02	60- 70	23.33	599.0	98.1,98.1
80	4.190	4.956	5.354	5.183	4.563	4.803	4.774	4.878	70- 80	9.663	608.7	99.7,99.7
90	0.0062	0	0	0	0.0309	0	0	0.0031	80- 90	2.016	610.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm		
NAME: LTMTC6W - 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Ledlite	SUR.:0.000962	PROTECTION ANGLE:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.00	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.00	.95	.91	.98	.93	.90	.94	.91	.88	.91	.88	.86	.89	.86	.84	.82
3.0	.91	.85	.81	.90	.84	.80	.87	.83	.79	.85	.81	.77	.82	.79	.76	.74
4.0	.84	.78	.73	.83	.77	.72	.81	.75	.71	.79	.74	.70	.77	.73	.70	.68
5.0	.78	.71	.66	.77	.70	.66	.75	.69	.65	.73	.68	.65	.72	.67	.64	.62
6.0	.72	.65	.61	.71	.65	.60	.70	.64	.60	.68	.63	.59	.67	.63	.59	.57
7.0	.67	.61	.56	.67	.60	.56	.65	.60	.55	.64	.59	.55	.63	.58	.55	.53
8.0	.63	.56	.52	.63	.56	.52	.61	.56	.51	.60	.55	.51	.59	.55	.51	.49
9.0	.59	.53	.48	.59	.52	.48	.58	.52	.48	.57	.52	.48	.56	.51	.48	.46
10.0	.56	.49	.45	.55	.49	.45	.55	.49	.45	.54	.49	.45	.53	.48	.45	.43

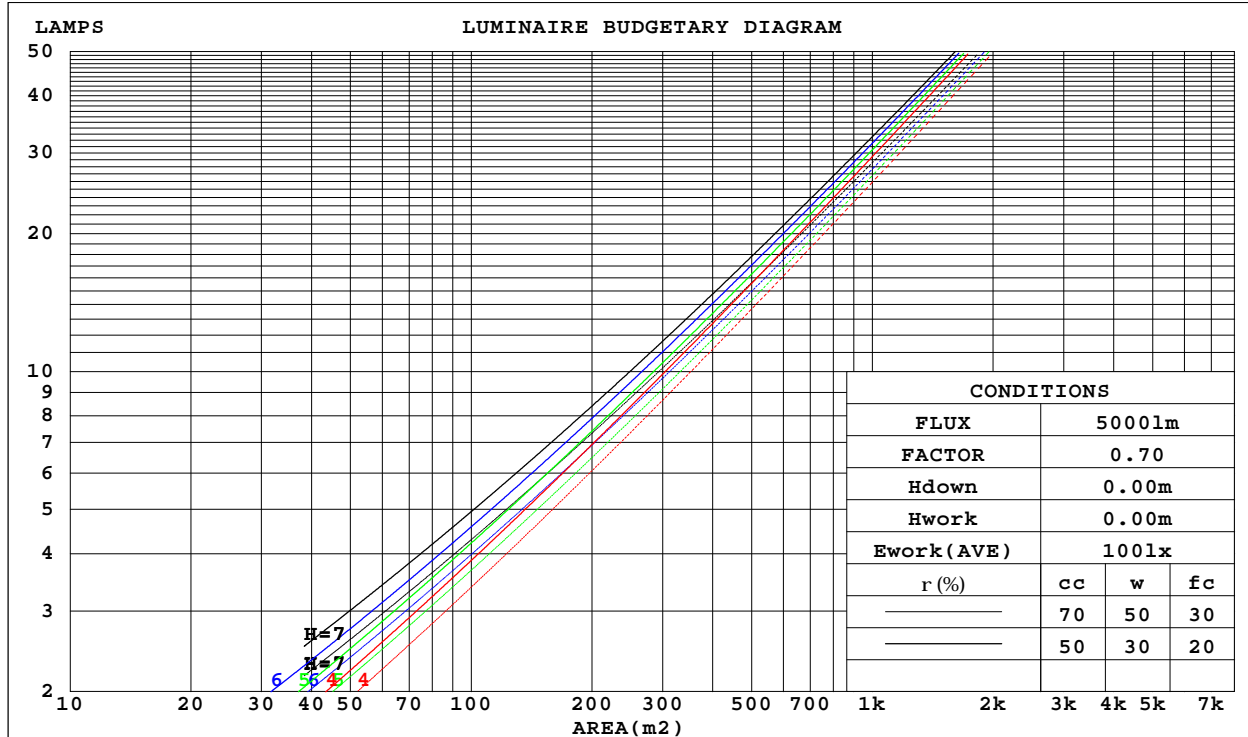

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm		
NAME: LTMTTC6W - 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Ledlite	SUR.:0.000962	PROTECTION ANGLE:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.213	.121	.038	.206	.117	.037	.193	.111	.035	.181	.105	.034	.171	.099	.032	
2.0	.204	.112	.034	.198	.109	.034	.188	.104	.032	.178	.100	.031	.168	.095	.030	
3.0	.193	.103	.031	.188	.101	.030	.179	.097	.029	.170	.093	.029	.162	.090	.028	
4.0	.182	.095	.028	.178	.093	.028	.170	.090	.027	.162	.087	.026	.155	.084	.026	
5.0	.172	.088	.025	.168	.086	.025	.161	.084	.025	.154	.081	.024	.148	.079	.024	
6.0	.163	.082	.023	.159	.080	.023	.153	.078	.023	.147	.076	.022	.141	.074	.022	
7.0	.154	.076	.022	.151	.075	.021	.145	.073	.021	.140	.072	.021	.135	.070	.021	
8.0	.146	.071	.020	.143	.071	.020	.138	.069	.020	.133	.068	.019	.129	.066	.019	
9.0	.139	.067	.019	.136	.066	.019	.132	.065	.018	.127	.064	.018	.123	.063	.018	
10.0	.132	.063	.018	.130	.063	.017	.126	.062	.017	.122	.060	.017	.118	.059	.017	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.149	.135	.122	.102	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.161	.132	.109	.138	.114	.094	.094	.079	.065	.054	.046	.038	.017	.015	.013	
3.0	.150	.114	.085	.128	.098	.074	.088	.068	.052	.051	.040	.031	.016	.013	.010	
4.0	.140	.100	.068	.120	.086	.059	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.132	.088	.056	.114	.076	.049	.078	.053	.034	.045	.031	.020	.015	.010	.007	
6.0	.125	.079	.046	.107	.069	.040	.074	.048	.029	.043	.028	.017	.014	.009	.006	
7.0	.118	.072	.039	.102	.062	.034	.070	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.113	.066	.034	.097	.057	.029	.067	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.107	.061	.029	.092	.053	.026	.064	.037	.018	.037	.022	.011	.012	.007	.004	
10.0	.102	.056	.026	.088	.049	.023	.061	.034	.016	.036	.020	.010	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm										
NAME: LTMTC6W - 4000k					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:001		
MFR.: Ledlite					SUR.:0.000962			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.4	27.5	26.6	27.7	27.9	26.6	27.7	26.8	27.9	28.0
3H	26.8	27.8	27.0	28.0	28.2	27.0	28.0	27.3	28.3	28.5
4H	26.9	27.8	27.2	28.1	28.3	27.1	28.1	27.4	28.4	28.6
6H	26.9	27.8	27.2	28.1	28.3	27.2	28.1	27.5	28.4	28.6
8H	26.9	27.8	27.2	28.1	28.3	27.2	28.1	27.6	28.4	28.7
12H	26.9	27.7	27.2	28.0	28.3	27.2	28.1	27.6	28.3	28.6
4H 2H	26.6	27.5	26.9	27.8	28.0	26.7	27.7	27.0	27.9	28.2
3H	27.1	27.9	27.4	28.2	28.5	27.3	28.1	27.6	28.4	28.7
4H	27.2	28.0	27.6	28.3	28.6	27.5	28.3	27.9	28.6	28.9
6H	27.3	28.0	27.7	28.4	28.7	27.6	28.3	28.0	28.7	29.0
8H	27.4	28.0	27.8	28.3	28.7	27.7	28.3	28.1	28.7	29.0
12H	27.4	27.9	27.8	28.3	28.7	27.7	28.3	28.1	28.6	29.0
8H 4H	27.3	27.9	27.7	28.2	28.6	27.5	28.1	27.9	28.5	28.9
6H	27.4	28.0	27.9	28.3	28.8	27.7	28.2	28.2	28.6	29.1
8H	27.5	27.9	27.9	28.4	28.8	27.8	28.3	28.3	28.7	29.1
12H	27.5	27.9	28.0	28.3	28.8	27.8	28.2	28.3	28.7	29.1
12H 4H	27.2	27.8	27.7	28.2	28.6	27.5	28.1	27.9	28.4	28.8
6H	27.4	27.9	27.9	28.3	28.7	27.7	28.2	28.2	28.6	29.0
8H	27.5	27.9	28.0	28.3	28.8	27.8	28.2	28.3	28.6	29.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 1.2					+ 0.8 / - 1.0				
1.5H	+ 1.0 / - 0.7					+ 1.0 / - 0.7				
2.0H	+ 1.5 / - 1.0					+ 1.5 / - 1.1				

CIE Pub.117 Corrected 610.7 lm Total Lamp Luminous Flux.(8log(F/F0) = -1.7)

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

g Range: 0 - 90DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm		
NAME: LTMTC6W - 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Ledlite	SUR.:0.000962	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	76	68	63	76	68	63	75	67	63	58
0.80	85	77	72	84	77	72	83	76	71	66
1.00	91	84	79	90	83	78	88	84	78	73
1.25	96	89	85	95	89	84	93	88	84	78
1.50	100	94	89	99	93	89	96	91	87	82
2.00	104	99	95	103	98	94	100	96	92	86
2.50	107	102	98	105	100	97	102	98	95	88
3.00	109	104	101	107	103	100	103	100	97	90
4.00	111	108	105	109	106	103	105	103	101	93
5.00	113	110	107	111	108	106	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm		
NAME: LTMTC6W - 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Ledlite	SUR.:0.000962	PROTECTION ANGLE:

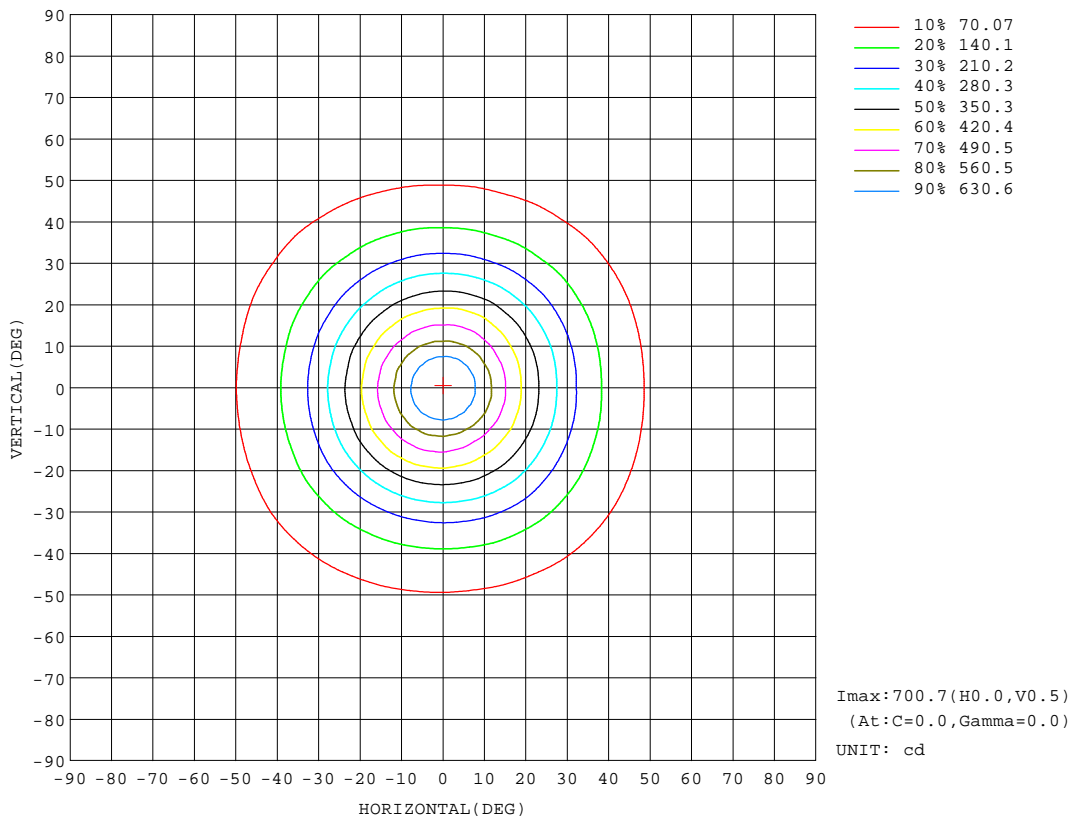


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

AAI Figure

Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm		
NAME: LTMTC6W - 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Ledlite	SUR.:0.000962	PROTECTION ANGLE:

Flux out:261.2 lm

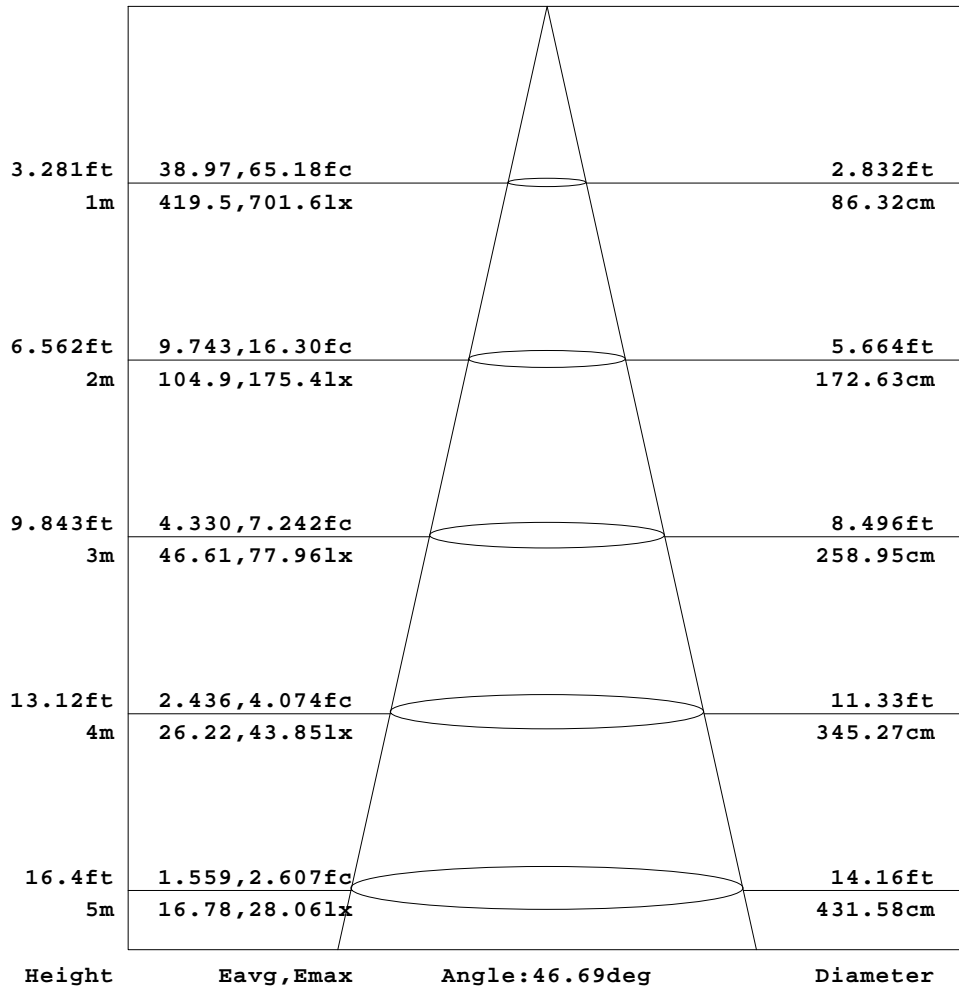


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm		
NAME: LTMTC6W - 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Ledlite	SUR.:0.000962	PROTECTION ANGLE:

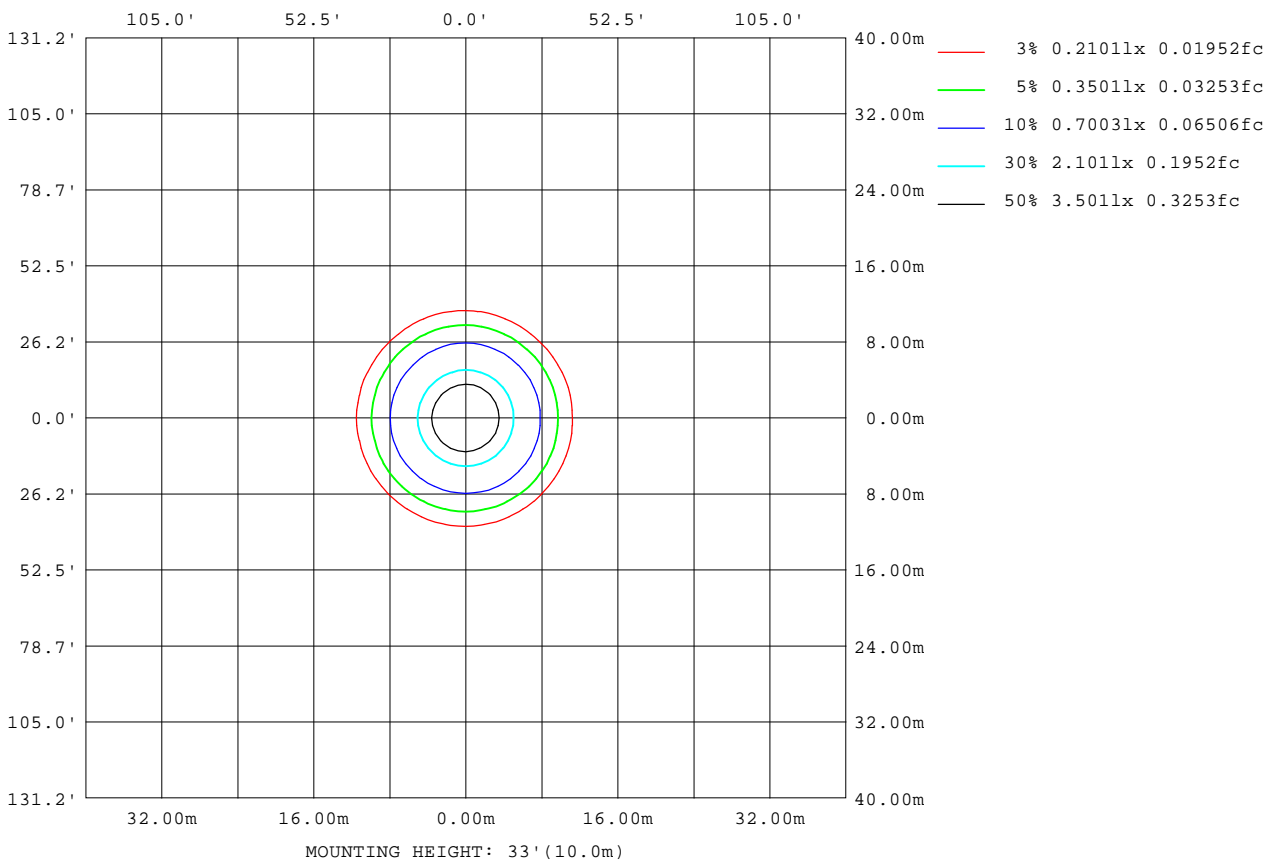

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

Planar Illuminance Curve

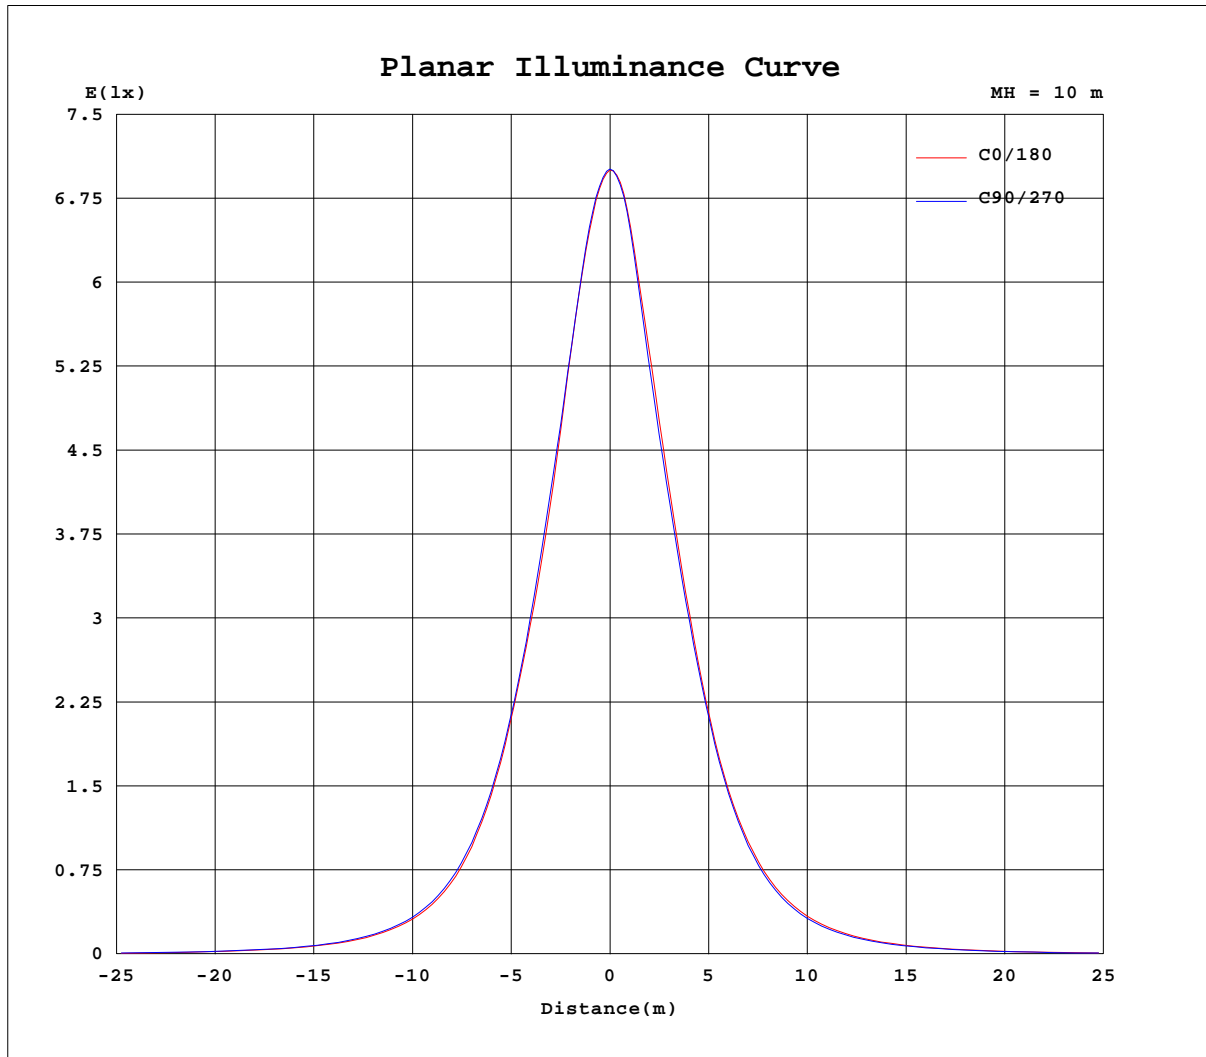

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 01
 Test Date: 2017-10-23

Page Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity: 65.0%
 Test Distance: 8.989m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm		
NAME: LTMTC6W - 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Ledlite	SUR.:0.000962	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG)\g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	701	701	701	701	701	701	701	701	701	701	701	701	701	701	701	701	701	701	701
5	669	669	668	669	667	669	668	670	669	671	670	672	671	673	672	674	672	673	674
10	593	597	595	596	592	593	590	592	590	594	592	595	594	596	593	595	592	593	594
15	493	496	494	495	492	493	490	496	496	501	502	505	504	506	504	506	504	505	505
20	401	404	404	406	404	407	405	408	407	411	410	414	415	417	415	417	413	414	415
25	320	323	324	325	325	327	325	326	324	325	325	326	327	327	327	328	327	327	328
30	241	244	244	246	248	251	249	249	246	246	246	246	247	248	247	248	247	246	247
35	175	178	179	180	182	184	183	184	182	181	181	181	181	182	182	183	182	182	183
40	124	126	127	129	129	131	131	132	130	130	130	131	131	132	131	133	131	132	133
45	88.8	89.6	90.2	91.1	91.3	92.7	92.1	93.5	93.1	93.6	93.7	94.1	93.6	94.2	93.9	95.4	94.4	95.1	96.0
50	63.8	64.3	64.5	64.7	64.8	65.4	65.5	66.6	66.7	67.5	67.7	67.8	67.4	67.5	67.5	68.4	68.0	68.6	69.6
55	46.1	46.5	46.4	46.6	46.2	46.8	47.0	48.1	48.1	48.7	48.9	49.1	48.7	48.8	48.6	49.2	49.1	49.6	50.2
60	33.3	33.7	33.6	33.7	33.4	33.6	33.9	34.7	34.7	35.2	35.3	35.5	35.1	35.1	34.8	35.3	35.2	35.6	36.0
65	22.7	23.1	23.0	23.2	22.9	23.2	23.2	23.9	23.9	24.3	24.2	24.4	24.0	24.0	23.7	23.9	23.7	24.0	24.4
70	12.9	13.4	14.0	14.4	14.3	14.5	14.6	15.0	15.0	15.3	15.2	15.3	15.0	15.0	14.6	14.7	14.6	14.8	15.1
75	7.99	8.24	8.42	8.76	8.88	9.01	9.00	9.20	9.26	9.42	9.39	9.48	9.33	9.28	9.08	9.11	9.03	9.12	9.25
80	4.19	4.38	4.63	4.84	4.89	5.02	5.01	5.17	5.22	5.35	5.33	5.40	5.26	5.27	5.10	5.11	4.83	4.57	4.56
85	1.49	1.56	1.57	1.64	1.65	1.75	1.73	1.80	1.80	1.86	1.84	1.89	1.81	1.80	1.70	1.66	1.53	1.47	1.50
90	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.03

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.4V I:0.0287A P:5.561W PF:0.8376 Lamp Flux:610.674x1 lm		
NAME: LTMTC6W - 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Ledlite	SUR.:0.000962	PROTECTION ANGLE:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	701	701	701	701	701	701	701	701	701	701	701	701	701	701	701	701	701		
5	672	674	670	672	670	672	670	672	671	672	671	673	672	673	670	672	670		
10	590	591	587	588	584	586	583	585	582	586	584	589	587	590	589	593	593		
15	501	503	497	498	493	495	492	494	491	495	494	496	494	494	491	494	493		
20	411	413	408	410	406	407	404	406	405	409	408	411	407	408	404	405	402		
25	324	325	321	321	319	320	320	321	321	323	323	325	323	324	322	323	322		
30	245	245	242	242	241	243	242	243	242	243	243	244	244	246	244	244	243		
35	181	181	178	179	177	178	178	179	177	178	175	177	175	178	177	177	176		
40	131	132	129	129	127	128	128	128	127	127	125	126	124	126	125	126	125		
45	94.8	95.2	92.7	93.1	91.5	91.8	91.4	91.7	90.5	90.6	88.6	88.9	87.3	88.4	88.0	88.8	88.7		
50	68.4	68.5	66.5	66.7	65.4	65.7	65.4	65.5	64.6	64.8	63.1	63.0	61.6	62.4	62.4	63.4	63.7		
55	49.5	49.4	48.0	47.8	46.9	47.4	47.1	47.1	46.5	46.5	45.4	45.2	44.3	44.7	44.8	45.7	46.1		
60	35.5	35.5	34.5	34.3	33.7	34.1	33.9	34.0	33.5	33.5	32.8	32.7	32.1	32.3	32.3	33.1	33.4		
65	23.9	24.1	23.4	23.4	22.9	23.2	23.0	23.2	22.8	23.0	22.5	22.5	22.0	22.3	22.2	22.8	22.8		
70	14.8	14.9	14.4	14.4	14.1	14.4	14.2	14.5	14.2	14.4	14.2	14.3	13.9	14.1	14.0	14.1	13.4		
75	9.11	9.16	8.86	8.82	8.63	8.77	8.68	8.83	8.73	8.87	8.83	8.93	8.78	8.89	8.65	8.49	8.17		
80	4.52	4.85	4.85	4.89	4.72	4.81	4.72	4.83	4.77	4.91	4.84	4.93	4.83	4.93	4.72	4.70	4.41		
85	1.48	1.56	1.52	1.58	1.51	1.57	1.53	1.57	1.55	1.63	1.61	1.65	1.59	1.61	1.56	1.61	1.58		
90	0.02	0.01	0.01	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.01	0.00	0.02		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2017-10-23

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks: