


LOW VOLTAGE HALOGEN -AR111

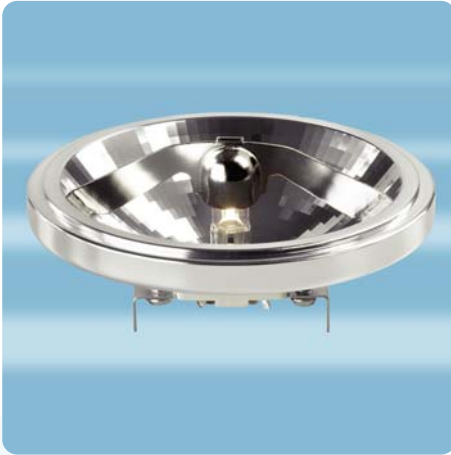

Aluminium reflector for better beam control, metal cap over the filament to avoid direct glare.


- UV block
- 2000 hour life
- 111mm dia
- 3 beam angles
- Dimmable
- For use in open luminaires

61


Order Code	Watts (W)	Volts (V)	Beam Angle	UK Ref	Cap	Colour Temp (°K)	*Candelas	Average Rated Life (hrs)	Order Qty
Single Carton									
LV35MALUM	35	12	24°	M353	G53	3000	2500	2000	5
LV50MALUM	50	12	24°	M161	G53	3000	3500	2000	5
LV50NALUM	50	12	8°	M101	G53	3000	20000	2000	5
LV75MALUM	75	12	24°	M162	G53	3000	17000	2000	5
LV75NALUM	75	12	8°	M102	G53	3000	30000	2000	5
LV75VALUM	75	12	45°	M103	G53	3000	5300	2000	5
LV100MALUM	100	12	24°	M152	G53	3000	8500	2000	5
LV100NALUM	100	12	8°	M114	G53	3000	48000	2000	5
LV100VALUM	100	12	45°	M191	G53	3000	2800	2000	5

*Lumen values = luminous intensity @ peak (in candelas)

DIMENSIONS



Dia (mm)	H (mm)
111	57



G53 cap



Low Voltage