

NEW
Compatible with
Honeywell Cloud
Services

Le Sucre™

INNOVATIVE AND DISCRETE PROTECTION SYSTEM FOR SELF MONITORING



Developed in response to home owner needs, Le Sucre is a wireless panel with wireless TAG reader and wireless sensors, which operate at 868 MHz European frequency. It provides a range of more than 1000 meters open space and integrates a GPRS module for alarm transmissions and notifications.

For installers, Le Sucre greatly increases the speed and quality of their installations: All the peripherals in the range are linked by radio, so no cables are needed to connect to the alarm panel, resulting in major time-saving and no disturbance to the decor of the installation site. This means that each peripheral can be located in such a way as to ensure perfect transmission, which not only saves time but also ensures maximum system reliability.

Le Sucre is designed to unobtrusively integrate into today's stylish interiors and can be placed anywhere in the home. Le sucre can be installed in a discreet location making it difficult for any intruder to find.

The quality of radio transmission is designed to give maximum protection against interference, and the

exceptional independent operation of Le Sucre peripherals (4 years battery life on average) guarantee long-lasting reliability to give the user complete peace of mind. This also means that the installer does not have to make repeated site maintenance visits. Le Sucre's ease of use avoids any operating errors. For example, the TCC800M keyfob gives the user direct control of the system's status (set / unset), avoiding the need to return to the alarm panel to check the status before going out.

Le Sucre includes a wireless visual verification feature which allows you to see what is happening if an alarm is activated. The home owner is notified by SMS* or email and can distinguish immediately whether an intrusion has occurred or if it is a false alarm.

Total Connect 2.0E and Honeywell Cloud Services allow the home owner to see the images on his smartphone or PC as well as to arm or disarm the system remotely.

Smoke or carbon monoxide gas can trigger an audible alarm. The built-in siren of the devices or the optional indoor siren informs the house occupants and enables them to react quickly.

Features

- Reducing the services fees, Le Sucre is designed to enable home owners to protect their family, possessions and assets at a low cost
- Using Total Connect 2.0E remote application, Le Sucre enables home owners to monitor their home and family via a PC or smart phone.
- SMS* and email notification to the end-user in case of alarm
- Condensed wireless technology:
 - Can send images from dedicated PIR/cameras
 - GPRS, 868 MHz radio
 - Up to 32 radio channels
 - More than 1000 meters open space radio range
- Opportunity to offer new services around home security monitoring
- Le Sucre also alerts home owners in case of smoke, carbon monoxide gas events to enables safety, comfort and security services covering domestic risks and more
- Proven and recognized technology from a leader in home security solutions design
- Compact designed unit
- Battery backup if mains fail
- Informing about ambient temperature in rooms where a PIR is installed, live and stored on the cloud



* optional service required

Le Sucre™

INNOVATIVE AND DISCRETE PROTECTION SYSTEM FOR SELF MONITORING

Le Sucre™ control panel

The control panel










	<p>Ref: SUGPACK-UK / SUGPACK-EU</p> <ul style="list-style-type: none">• Comes with e-mail notification services for a two year period• Up to 32 peripherals per installation• RF Range > 1000 meters open space radio range• 2-way 868MHz radio transmission with adaptive radio jamming detection• Transmission using GPRS with built-in antenna• Standard SIM Card with roaming services• Power supply 230V~ to 5V/1A (supplied)• Battery Type 2 x AAA rechargeable batteries (supplied)• Stand-by 3h (in case of mains loss)• Dimensions 105 x 59 x 18 mm (W x H x D)• Supervision• Low Battery Signalling• LED System information reports• Operating temperature -10°C to 55°C
<p>SMS Notification option</p>	<p>Ref: HCS-SMS-2Y *</p> <ul style="list-style-type: none">• SMS notification services for a two year period
	<p>Le Sucre is provided in a box including:</p> <ol style="list-style-type: none">1 Le Sucre control panel2 One SIM card3 One multi-functions tool4 Two AAA batteries5 One Power supply6 Quick Installation Guide <p>UK plug for SUGPACK-UK, European plug for SUGPACK-EU</p> <p>* available June 2015</p>

Le Sucre™

INNOVATIVE AND DISCRETE PROTECTION SYSTEM FOR SELF MONITORING





Le Sucre™ peripherals

Detection range

	Glassbreak detector Ref : FG8M <ul style="list-style-type: none"> • 7.6, 4.6, 3, 1.5m detection range • Two batteries (CR123A) • 115 x 72 x 27 mm
	Smoke sensor Ref : DFS8M <ul style="list-style-type: none"> • built-in siren 85dB(A) @ 3m • One battery (CR123A) • Ø120 x 45 mm
	Carbon Monoxide sensor Ref : CO8M <ul style="list-style-type: none"> • Built-in siren 85dB(A) @ 3m • Six years life cycle soldered battery • 120 x 105 x 45 mm
	Dualtec® detector Ref : DT8M, DTPI8M <ul style="list-style-type: none"> • 15 x 18m detection range • Four batteries (AA lithium) • Pet immune version (DTPI8M) • 125 x 75 x 52 mm
	PIR detector with colour Camera Ref : CAMIR-F1 <ul style="list-style-type: none"> • 11 x 12m detection range • 90° camera view angle • White LED for night vision • Two batteries (CR123) • 55 x 121 x 64 mm
	PIR detector Ref : IR8M, IRPI8M <ul style="list-style-type: none"> • Pet immune version (IRPI8M) • 10 x 12m detection range • One battery (CR123A) • 112 x 60 x 40 mm
	Door contact Ref : DO8M <ul style="list-style-type: none"> • One battery (CR123A) • 102 x 22 x 23 mm
	Shock sensor Ref : SHK8M, SHK8M, SHK8M2 <ul style="list-style-type: none"> • With or without door contact • One battery (CR123A) • 89 x 41 x 30 mm
	Temp & flood sensor Ref : DET8M <ul style="list-style-type: none"> • < 2°C to 14°C and > 20°C to 32°C • Alarm, flood or ext. Temp. probe • One battery (CR123A) • 89 x 41 x 30 mm

Other products may be compatible, please consult us.
 Honeywell reserves the right to alter the specification of products



Keyprox

TAG reader Ref. : SPR-S8EZ <ul style="list-style-type: none"> • Up to 10 users • Two buttons • Four LEDs for status • Three batteries (CR123A) • 110 x 110 x 30 mm 	
Proximity TAG Ref : TAG-I	
Proximity TAG Ref : TAG-G	
Proximity TAG kit (x4) Ref. : TAG4 <ul style="list-style-type: none"> • 1 Yellow, 1 red, 1 blue, 1 dark grey 	

Keyfobs Range

Keyfob Ref : TCC800M <ul style="list-style-type: none"> • Four buttons • Three LEDs for status • One battery (CR2032) • 56 x 48 x 9 mm 	
Keyfob Ref : TCE800M <ul style="list-style-type: none"> • Four buttons • One LED • One battery (CR2032) • 57 x 31,75 x 12,7 mm 	
Keyfob Ref : TCPA1B/TCPA2B <ul style="list-style-type: none"> • One or two buttons • One LED • IP67 • One battery (CR2032) • 40 x 14,5 mm 	

Sirens

Indoor siren Ref : S1800M <ul style="list-style-type: none"> • Sound Level: Selectable from 95dBA to 120 dBA • Three batteries (CR123) • 165 mm Diameter 	
Outdoor siren Ref : SEF8M* <ul style="list-style-type: none"> • Sound Level 103dBA • Eight batteries (AA lithium) • 240 x 330 x 73 mm 	

* available June 2015

Le Sucre™

INNOVATIVE AND DISCRETE PROTECTION SYSTEM FOR SELF MONITORING


Total Connect 2.0E allows to remotely manage Le Sucre over the internet using a single browser

- No App to install
- Accessed from a PC, a tablet or a smartphone
- Allows security functions (arm, disarm)
- Displays images on-demand or when an alarm occurs

Home page



Menus

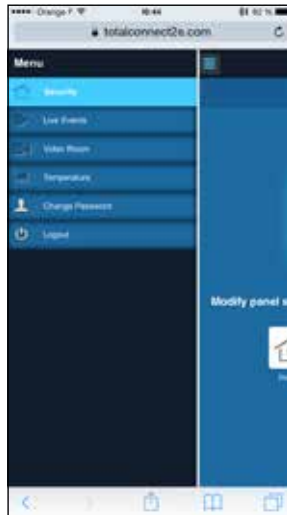

Security



Events



Videos



Temperature



Find out more:

www.honeywell.com/security/uk
Fax: +44 (0) 1698 738300
email: securitysales@honeywell.com

Honeywell Security Group

Newhouse Industrial Estate
Motherwell
Lanarkshire
ML1 5SB
Scotland
Tel:+44 (0) 1698 738200

Ampèrestraat 41
1446 TR Purmerend
Nederland
Tel : +31 (0) 299-410200
www.honeywell.com

HSC-Sucre-05-EN(0415)DS-E
April 2015
© 2015 Honeywell International Inc.

Honeywell