




This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012



Optional stainless steel frame included





Hole Cut Out Size:
L: 228mm
D: 75mm
H: 98mm

LED BRICKLIGHT WITH STAINLESS STEEL FRAME

A modern design that gives an instant cool white light. Ultra low energy consumption and prolonged lamp life.

- Polycarbonate construction
- Opal diffuser with optional stainless steel frame offering a soft, stylish lighting effect
- Integral driver
- Cable gland included
- Eterna 2 year warranty

• M.O.M: 1 / O.P.Q: 6

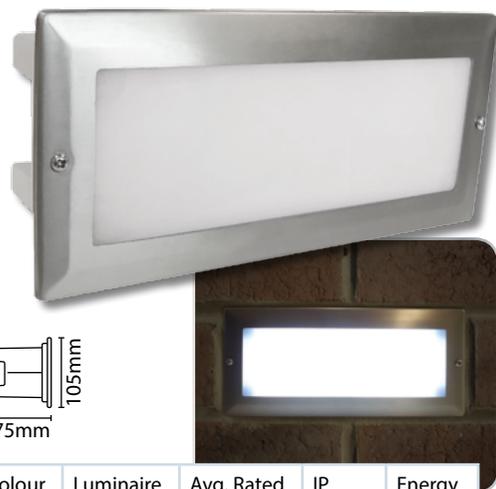

LED LAMP SPECIFICATIONS:

Luminaire lumens (with diffuser)	280 lm
Lumens from chip (no diffuser)	450 lm
Useful lumens	260 lm
Rated Wattage	5.4W
Rated luminous flux	260 lm
Nominal life time of the lamp	20,000 hrs
Colour temperature	6000K
Number of switching cycles before premature lamp failure	10,000
Warm-up time up to 60% of the full light output	Instant full light
Dimmable	No
LED array dimensions (L/W)	192x64mm
Nominal beam angle	120°
Rated power	5.4W
Rated lamp lifetime	20,000 hrs
Lamp power factor	>0.5
Lumen maintenance factor at end of nominal life	60%
Starting time	<0.1s
Colour rendering	78
Colour consistency	Within a six step Macadam ellipse
Rated peak intensity	84cd
Rated beam angle	120°
Voltage / Frequency	240V~50Hz

Not suitable for accent lighting

Code	Colour	Wattage	Colour Temp.	Luminaire Lumens	Avg. Rated Life (Hrs)	IP Rating	Energy Rating
BRICKLED	White / Stainless Steel	5.4W	6000K	280 lm	20,000 hrs	IP65	A