

Coria CCT LED Bollard

Bollards



Data Sheet

Product Information

The 3 CCT Coria LED Bollard are a 3 in one solution for uses in exterior applications where the option to be able to adjust the colour to suit the application is required at the flick of a switch. These are ideal for pathways, security lighting and entrance lighting applications.

Complete with a 2 year warranty

Product Features

- 2 year warranty
- Class I
- IP65
- High CRI up to Ra86
- Instant on
- Life Expectancy up to 30,000hrs
- 3 switchable Colour temperatures 3000K/4000K/7000K
- Supplied complete with driver
- Non-Dimmable
- Available in 3 heights 450mm, 750mm and 1000mm
- 180° beam angle
- Root mount kit available

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
GL9916	Coria 20w CCT 450mm LED Bollard	20	3000	1528	82	A+	I
			4000	1724	86		
			7000	1535	84		
GL9917	Coria 20w CCT 750mm LED Bollard	20	3000	1528	82	A+	I
			4000	1724	86		
			7000	1535	84		
GL9918	Coria 20w CCT 1000mm LED Bollard	20	3000	1528	82	A+	I
			4000	1724	86		
			7000	1535	84		
Accessories							
GL9914	Coria Root Mounting Kit						

Nominal voltage	220~240VAC
Operating frequency	50-60Hz
Circuit Wattage	18.1w including Driver (4000K Output)
Circuit Current	0.08A
Driver Current Rating	250mA
PFC	0.95
In Rush Current	1.47 Amps Max Peak
Start Time	< 0.5 Sec
Ambient temperature range	-15°C to +40°C
IP rating	65

Construction

Body: Die Cast Aluminium
 Lens: Polycarbonate


Standards

BSEN60598-1:2015 Luminaires – Part 1: General Requirements and tests


In Conformity with

LVD Low voltage directive 2014/35/EU
 EMC Electromagnetic compatibility directive 2014/30/EU
 ERP Energy related products directive 2009/125/EC
 RoHS Restriction of hazardous substances 2011/65/EU


Product Dimensions

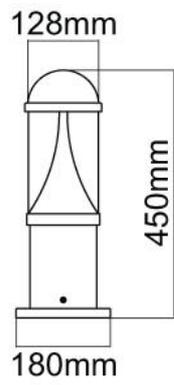

GL9916

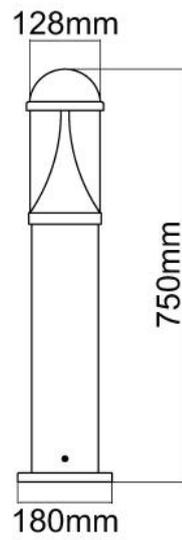

GL9917

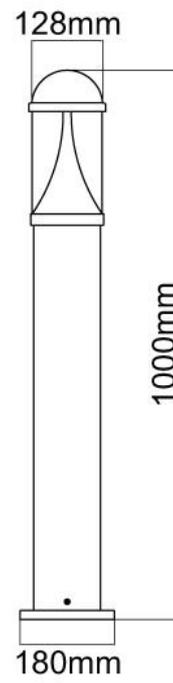

GL9918