




MAGDUOSRIP55

Sounder for MAGDUO

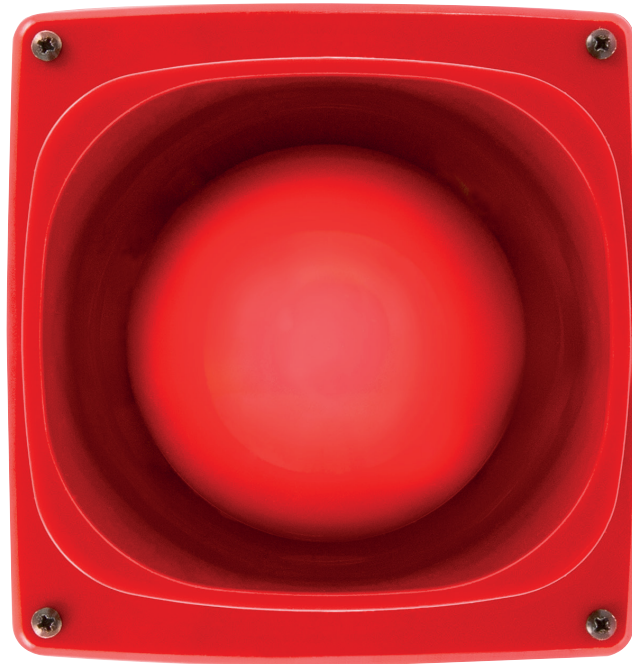

- IP55 Ingress protection
- Volume level adjustment
- Built-in End of Line function
- Device base included

Dimensions

Width	123mm
Height	130mm
Depth	101mm

Temperature Range

Operating Temperature	-10°C to +50°C
-----------------------	----------------

Voltage Ranges

DC Output from Mains Powered Panel	25.5 to 35V DC
DC Output from Battery Powered Panel	20 to 26V DC

Operating Current (Typical)

Quiescent	185 uA
End of line ON if applicable (in addition to Quiescent)	175 uA
Alarm Sounding – Sounder High	14.5 mA
Alarm Sounding – Sounder Low	12.6 mA

Device Loading Units

Max Device Loading Units per Zone	160 DLU
Sounder High	14.5 DLU
Sounder Low	13.0 DLU

Volume Level (@ 1m anechoic, Dual Tone)

Sounder High	90+ dB(A)
Sounder Low	65+ dB(A)

Ingress Protection

IP Rating	IP55
-----------	------