MANROSE QUALITY VENTILATION

THE NEW COMPACT


HAND DRIER

The new MANROSE® compact hand drier is a warm air sensor operated drier. The unique compact slim design, will fit unobtrusively into any domestic, office or commercial facility. It is designed for medium usage; such as offices, clinics and catering establishments. They are not recommended for use in public areas subject to vandalism, for example public lavatories and unsupervised areas. The automatic sensor makes the drier more hygienic than the push button model, and is cost effective compared to traditional hand towels.

- ABS thermoplastics one-piece cover.
- Approved.
- Waved Ni-Cr wire heating element that incorporates a self-resetable thermal cut-off at 95°C.
- AcAdjustabledetection sensor.
- IR Sensor with PC viewing screen.

| Voltage | 220-240V | Total Power | 1.100 W |
|----------------------|-------------------------|--|---------|
| Frequency | 50/60 Hz | Motor Power | 150 W |
| Electrical isolation | Class II | RPM | 15.000 |
| Dimensions | 258 x 145 x 138 mm | Consumption | 4.8A |
| Weight | 1.2 kg | Heating element power | 950W |
| Effective airflow | 96 m³/h 1.600 l/min | Air Temp (at 10 cm distance at 21°C) | 47°C |
| Nominal airflow | 110 m³/h 1.833 l/min | Drying time | 39 sec |
| Air velocity | 85 Km/h | Noise level (at 2m) | 60 dB |
| Protection level | IP23 | | |



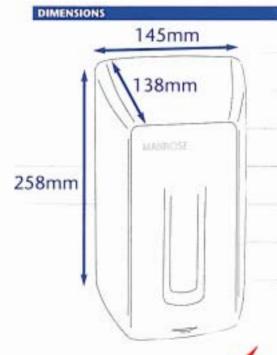



Manrose Manufacturing Limited, 1 Albion Close, Slough, Berkshire SL1 4RA Telephone: 01753 691399 Facsimile: 01753 692294

www.manrose.co.uk Email: sales@manrose.com