


The Dual Quinetic wireless receiving controller with a high-efficiency switching power supply has a wide voltage range with excellent stability and durability. 2 loads can be connected, using the two live outputs. Maximum load capacity is 2 x 6A. The Dual Quinetic wireless receiving controller is equipped with an in-rush current suppression function thus creating a safe and durable product.



QR323


Wiring:

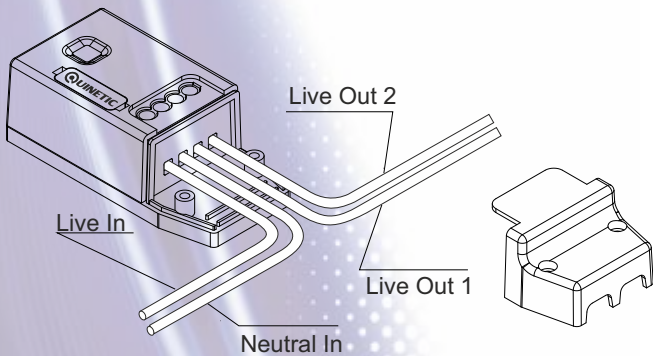

QR323 - Quinetic Dual Controller Specifications:

Voltage Range	85-260V
Sensitivity	-116dB
Control Load	2 x 6A Fused
Max load for LED Lighting	500w & 1100 watts for other loads. *
Outer Shell Material	DOW PC (fire)V-0
Weight	25g
Life Time	200,000 times on/off
Work Environment Temperature	-30~55°C
Control Distance	160m (outdoor) ; 30m (indoor)
Control Method	Pairing with Quinetic Wireless Switch
*Maximum loads may vary from manufacturer to manufacturer of the load.	

Dimensions:

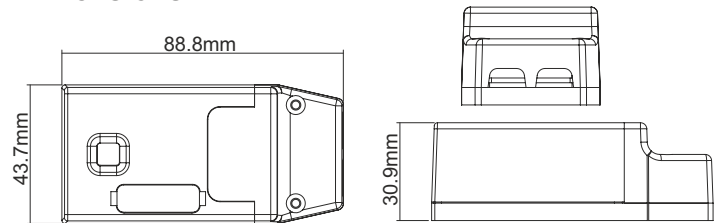


Quinetic Controller Wireless Systems

The dual wireless Quinetic receiving controller can be paired with the Quinetic switch with any combination: a controller can be controlled by a maximum of 10 separate switches, a switch can pair an unlimited number of controllers.


1-Way Wireless System

Single-Multi-Control

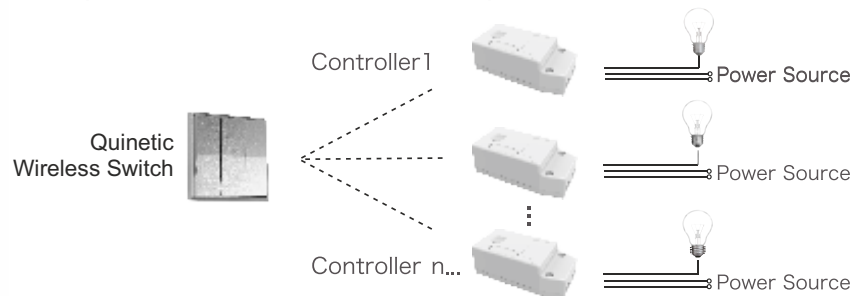

2-Way Wireless System

Dual Control

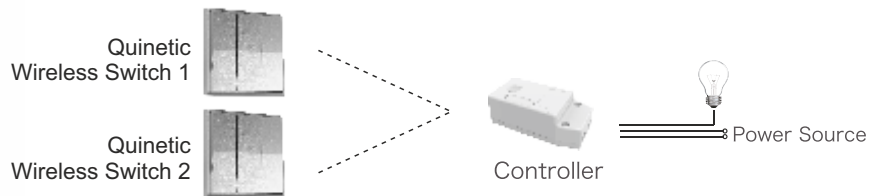

3-Way Wireless System

Multi-Single-Control

