
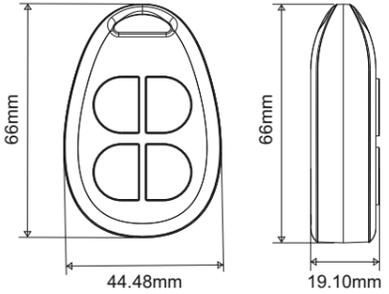


QUFB4

Wireless Key Fob Switch Instructions 80*60mm

	 <p>QUFB4</p> <p>Wireless 4 Gang Key Fob Switch</p> <p>Installation Instructions</p> <div style="display: flex; justify-content: space-around; align-items: center;">       </div>	<p>Read instructions carefully before installation</p>  <p>Wireless 4 Gang Key Fob Switch</p> 	<p>Specifications</p> <p>Wireless Key Fob Switch Technical Parameters:</p> <p>Work Type: Push Button Power Source: Micro energy acquisition and self generating (no battery required) Number of Keys: 4 (4 gang) Control Distance*: 80m outdoor, 25m indoor Control Method: Pairing with Quinetic Wireless Controller Communication Frequency: RF 433Mhz Life Time: 100,000 times on/off 3 Year Warranty Work Environment Temperature: -20°C ~ 55°C</p> <p>Every Quinetic product has passed the strict quality inspection before it leaves the factory. Quinetic provides 3 years warranty if installed and used in accordance with these instructions. Within the 3 years warranty period, Quinetic will be responsible for the repair, free replacement of parts or entire product.</p> <p><small>*Distance comes from Quinetic laboratory test result. The actual distance in practical use might vary due to environmental difference.</small></p>
--	--	--	---

<p>Wireless Key Fob Switch Operation:</p> <p>The Quinetic wireless key fob switch is portable and can be connected to a key ring. It can be used with standard or dimming Quinetic receiving controllers (see controller instructions for more details about pairing).</p> <p>Dimming Operation:</p> <p>When paired with the dimmable Quinetic controllers the key fob switch can also dim the lights: Pressing the switch quickly will turn the light ON/OFF. Keep the switch pressed to dim the light to the desired level. While the switch is pressed the lights will go down from 100%-0% and they will go up from 0-100% cyclically.</p> <p>Quinetic Switch and Controller Wireless System:</p> <p>The wireless kinetic energy key fob switch and wireless receiving controller can be paired with any combination: a controller can be controlled by a maximum of 10 separate switches, a switch can be paired with an unlimited number of controllers.</p>	<p>Directional pairing method:</p> <p>The directional pairing mode supports only 2 and 4 gang Quinetic dimmable switches. Directional pairing mode allows one gang to turn OFF and dim the light and the other gang to turn ON and brighten the light.</p> <ol style="list-style-type: none"> 1. Press the function button on the Quinetic receiving controller for 3 seconds and the indicator light begins to flash slowly. Release the button to enter the pairing state. 2. The 4 gang key fob switch has two sets of directional pairing keys. Press the left or right gang of the desired set on the wireless kinetic energy switch four times quickly (within 0.5 seconds) and the indicator light of the controller will go out, which means that the directional pairing is successful. 3. After pairing is successful, left and right gang will act as a group. Quickly press the left gang to turn OFF and the right gang to turn ON the light. Long press the left gang for dimming and the right gang to brighten. 	<p>Product dimensions:</p>   <p><small>*For more information about pairing, instructions and troubleshoot please visit www.tlc-direct.co.uk website.</small></p>	
---	---	---	--