

**TITLE:**

SFX100 Coaxial

**CODE:**

SFX/100-PREM-PVC-BLK-100


**DESCRIPTION:**

100m SFX100 Coaxial Premium Black PVC

**SUPPLIED AS:**

Reel of 100m

- High frequency, low loss cable, designed to carry CCTV, TV and Satellite Signals
- Manufactured with gas injected foam granting the cable a much better mechanical, electrical and ageing performance compared to a solid PE dielectric
- Polyvinyl chloride plastic has excellent aging properties and will usually exceed a 25-30 year service life
- This family of cable contains both a foil and braided screen, enhancing performance and reducing interference
- Improved performance and protection against fire

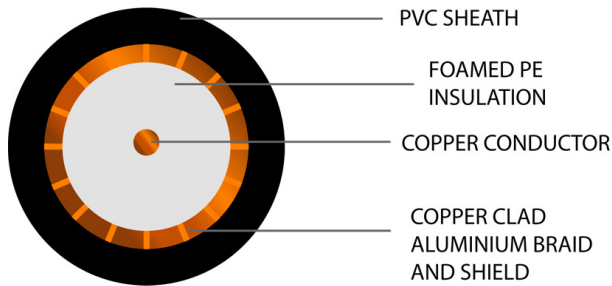

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



## Product Specification

### Cable Construction

CPR	Eca
Conductor Diameter (mm)	1.00 ±0.01
Inner Conductor	Bare Copper
Overall Diameter (mm)	6.55 ±0.10
Compliance and Standards	CE2014/30/EU, RoHS2 2011/65/EU, LVD 2014/35/EU

### Insulation

Insulation	Foamed PE
Insulation Colour	White
Insulation Thickness (mm)	1.79 ±0.01

### Outer/Jacket Specification

Jacket	PVC
Overall Colour	Black
Overall Diameter (mm)	6.55 ±0.10
Jacket Colour	Black RAL 9005
Jacket Thickness (mm)	0.7

### Electrical Characteristics

Outer Conductor DC resistance @ 20°C	<450/km
Rated Temperature (°C)	-20°C to 80°C
Impedance	750 ±30
Capacitance	>52 nF/km




enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



## MORE INFORMATION:

EURO CLASS (ca: cable)	CLASSIFICATION CRITERIA		CPR GUIDE	Securi-Flex®	
	FIRE RATING	SFX COMMENT			
Reaction to Fire BS EN ISO 1716			SUBCLASSIFICATIONS FOR EUROCLASSES B <sub>ca</sub> to D <sub>ca</sub>		
<b>A<sub>ca</sub></b>	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet A <sub>ca</sub> , so they should only be specified with extreme caution.	<b>(S) SMOKE PRODUCTION</b>	<b>(D) FLAMING DROPLETS</b>	<b>(A) SMOKE ACIDITY</b>
Reaction to Fire BS EN 50399			BS EN 50399/BS EN 61034-2	BS EN 50399	BS EN 60754-2
<b>B1<sub>ca</sub></b>	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1 <sub>ca</sub> .	s1a: s1 + transmittance >=80% (BS EN 61034-2) s1b: s1 + transmittance >=60% <80% (BS EN 61034-2) s1: Low production of slow propagation of smoke s2: Intermediate production & propagation of smoke s3: None of the above	d0: No fall of droplets or flaming particles, times for 1200 seconds  d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds  d2: None of the above	a1: Very low acidity (conductivity <2.5 μS/mm & pH >4.3)  a2: low acidity (conductivity <10 μS/mm & pH >4.3)  d2: None of the above
<b>B2<sub>ca</sub></b>	Combustible, low flame spread & heat release contribution to the fire	Similar to Class C <sub>ca</sub> , although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.			
<b>C<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class D <sub>ca</sub> , this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class C <sub>ca</sub> though availability is improving.			
<b>D<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.			
Reaction to Fire BS EN 60332-1-2			<b>Visit us online:</b> <a href="http://www.securiflex.co.uk">www.securiflex.co.uk</a> The Trusted Cable Brand		
<b>E<sub>ca</sub></b>	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2 <sub>ca</sub> to E <sub>ca</sub> . For a cable to meet A <sub>ca</sub> , B1 <sub>ca</sub> , B2 <sub>ca</sub> or C <sub>ca</sub> , there also needs to be regular on-going factory audits.		
<b>F<sub>ca</sub></b>	Combustible, fire spread of more than 425mm	Cables classified to Class F <sub>ca</sub> may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.			

## OUR OPERATING TEMPERATURE RANGE GUIDE

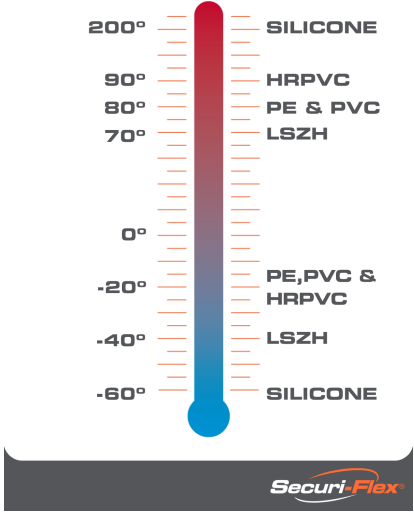

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.