



SFX/CW1308-2-LSF-WHT

CW1308 2 Pair White LSF

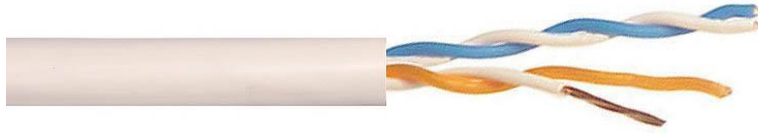

<b>Cable Construction</b>	2 Pairs	
Conductor	Bare Copper	
Conductor Diameter (mm)	0.40 ±0.008	
<b>Insulation</b>	PVC	
Insulation Thickness (mm)	0.185	
Insulation Diameter (mm)	0.82 ±0.05	
<b>Insulation Colours and Lay (mm)</b>		
Pair 1; Pair 2	White/Blue,Blue/White,<100	White/Orange,Orange/White,<100
Nylon Rip-Cord	210D	
Jacket	LSF	
Jacket Thickness (mm)	0.45	
Overall Diameter (mm)	3.80 ±0.20	
Jacket Colour	White RAL 9003	
Sheath Printing	CW1308 2PR LSF RoHS2 (PO) (m)	
Reaction to Fire	Eca	
<b>Electrical Characteristics</b>		
Max Conductor DC resistance @ 20°C	<120Ω/km	
Rated Temperature	80°C	
Rated Voltage	30V	
Insulation Resistance @20°C	>200MΩ/km	
Standards	CW1308, CE 2014/30/EU, RoHS2 2011/65/EU	
Application	Interconnection of interior telecom equipment.	