



SFX/CW1308-3-LSF-WHT

CW1308 3 Pair White LSF

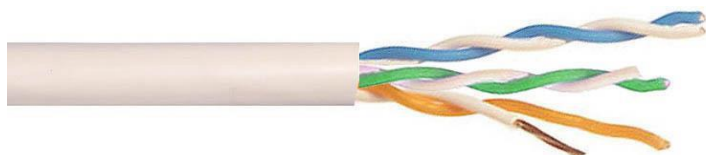

Cable Construction	3 Pairs	
Conductor	Bare Copper	
Conductor Diameter (mm)	0.40 ±0.008	
Insulation	PVC	
Insulation Thickness (mm)	0.185	
Insulation Diameter (mm)	0.82 ±0.05	
Insulation Colours and Lay (mm)		
Pair 1; Pair 2	White/Blue,Blue/White,53	White/Orange,Orange/White,56
Pair 3	White/Green,Green/White,58	
Nylon Rip-Cord	210D	
Jacket	LSF	
Jacket Thickness (mm)	0.45	
Overall Diameter (mm)	4.00 ±0.20	
Jacket Colour	White RAL 9003	
Sheath Printing	CW1308 3PR LSF RoHS2 (PO) (m)	
Reaction to Fire	Eca	
Electrical Characteristics		
Max Conductor DC resistance @ 20°C	<120Ω/km	
Rated Temperature	80°C	
Rated Voltage	30V	
Insulation Resistance @20°C	>200MΩ/km	
Standards	CW1308, CE 2014/30/EU, RoHS2 2011/65/EU	
Application	Interconnection of interior telecom equipment.	