



DECOR-200

NEW
"Z" versions with
ball bearings



Applications

The DECOR-200 models are suitable for the extraction of odours and moisture from toilets, bathrooms and all small rooms requiring ventilation.

The slimline profile of the fan allows the DECOR-200 to be installed in any wall or ceiling without detracting from the aesthetics of its environment.

The DECOR-200 provides an effective ventilation solution for wall and ceiling; non-ducted and ducted; single or multi-point ventilation systems.

The "Z" versions incorporate long life motors fitted with ball bearings.


Reference

D	E	C	O	R	2	0	0	C	H
1								2	

1 - Model series

2 - Model "options" reference

Performance curve

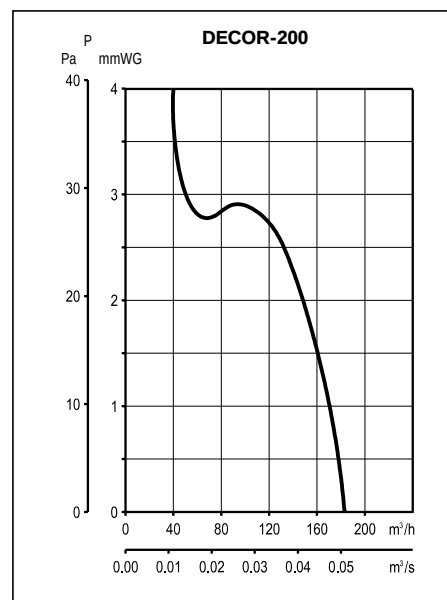

Technical characteristics


Model Type	Speed (r.p.m.)	Maximum power absorbed libre (W)	Voltage (V) 50 Hz	Maximum air flow (m³/h)	Sound pressure level (dB(A))	Weight (kg)	Ins./ IP
DECOR-200	2500	20	230	185	45,5	0,8	□ IP-X4*

* "H" Versions: IP-X2


Models

Model Type	C	CZ	CR	CRZ	CH
Neon light indicator	•	•	•	•	•
Automatic back draft shutter	•	•	•	•	•
Adjustable Run-On-Timer			•	•	•
Adjustable humidistat					•
Ball bearings		•		•	

Installation

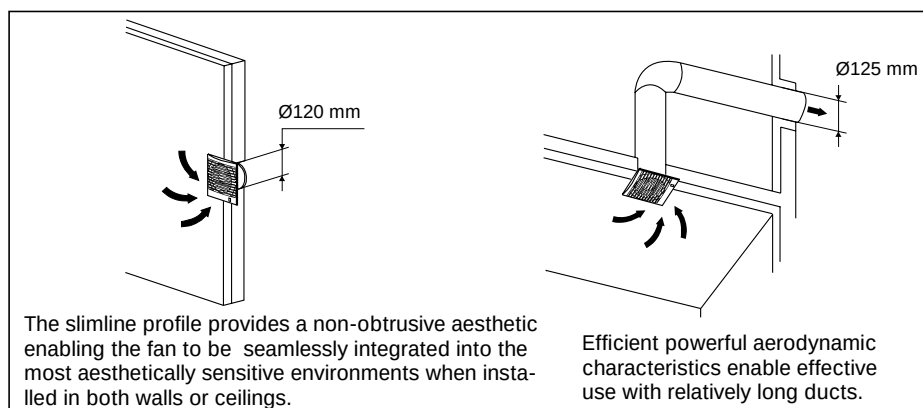

Dimensions (mm)

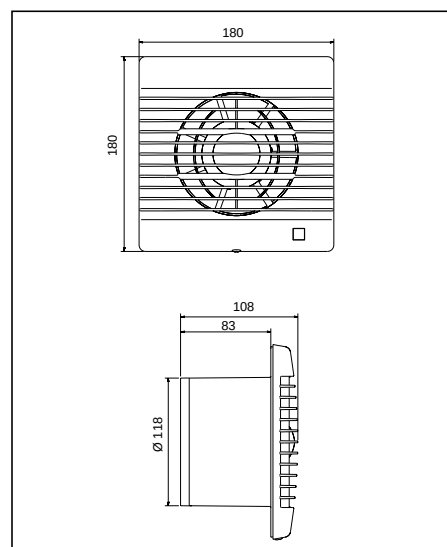

Accessories



GSA-125
Flexible aluminium
duct



GRA-100
Exterior grille



PER W-125
Back draft shutter