


LED floodlight without sensor

XLED ONE

Anthracite

EAN 4007841 065201

Article number 065201

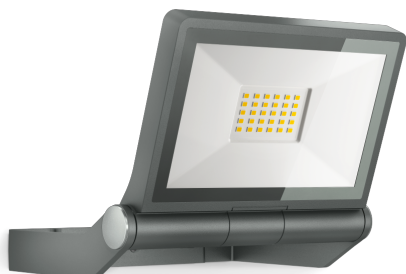

LED

long life LED
50.000 h

3000 K

3000K
warm-white



IP44



Panel 180° vertical



indoor/outdoor
light



energy saving

3 years

manufacturer's
warranty
steinel.de/garantie3y

CE

CE



Light source not
exchangeable



Control gear not
exchangeable

Function description

Astonishingly efficient. Extra-long service life. The XLED ONE wall and ceiling spot impresses with modern LED technology and provides 3000 K and 2050 lm of warm white light from an energy-saving 17,8 W. The aluminium panel can be tilted through 180°. With high-quality and powerful reflector as well as long-life LEDs (30 years).

Technical specifications

Dimensions (L x W x H)	173 x 229 x 195 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	3 years
Version	Anthracite
PU1, EAN	4007841065201
Application, place	Outdoors
Application, room	outdoors, all round the building, courtyard & driveway
Installation site	ceiling, wall
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium

Mains power supply	220 – 240 V / 50 – 60 Hz
Output	5 - 25 W
Photo-cell controller	No
Luminous flux total product	2050 lm
Measured luminous flux (360°)	2050 lm
Total product efficiency	115 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 36000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Basic light level function	No

LED floodlight without sensor

XLED ONE

Anthracite

EAN 4007841 065201

Article number 065201



Dimension Drawing

