

Sensor-switched LED floodlight

# XLED curved S

V2 Anthracite

EAN 4007841 012076

Article number 012076



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



infrared sensor 160°



max. 8 m



IP44



2 - 1000 lux



2 sec - 70 min



ideal 2 m



energy saving

3 years

manufacturer's warranty  
steinel.de/garantie3y

## Function description

Illuminating compact model. Sensor LED floodlight XLED curved S with 9,3 W, compact and discreet lighting solution for building entrances, pathways and co., attractive luminous efficiency (862 lm) requiring very little energy, sensor reach of up to 8 m, tilting range of +30°.

## Technical specifications

Dimensions (L x W x H)	120 x 160 x 107 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	3 years
Version	Anthracite
PU1, EAN	4007841012076
Application, place	Outdoors
Application, room	outdoors, all round the building, terrace / balcony
Installation site	wall
Installation	Wall, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	5 - 25 W
Power consumption	0,5 W
Mounting height max.	4,00 m
Sneak-by guard	Yes

Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	No
Photo-cell controller	Yes
Luminous flux total product	862 lm
Measured luminous flux (360°)	862 lm
Total product efficiency	93 lm/W
Colour temperature	3000 K
Colour Rendering Index	80-89
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Soft light start	No
Twilight setting	2 – 1000 lx
Time setting	2 s – 70 Min.
Basic light level function	No
Twilight setting TEACH	No
Interconnection	No

<https://www.steinel.de>

Sensor-switched LED floodlight

# XLED curved S


V2 Anthracite

EAN 4007841 012076

Article number 012076



## Detection Zone

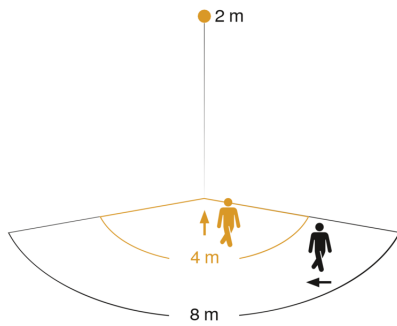


Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

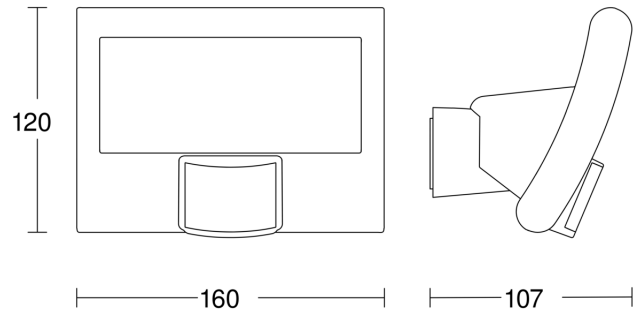

## Circuit diagram 1

