

Sensor-switched LED floodlight

# XLED slim S

white

EAN 4007841 012069

Article number 012069



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



infrared sensor 160°



max. 8 m



IP44



2 - 1000 lux



2 sec - 70 min



ideal 2 m



energy saving

3 years

manufacturer's warranty  
steinel.de/garantie3y

## Function description

Light meets elegance. Elegantly designed sensor LED floodlight XLED slim S with 7,2 W, ideal for building entrances and pathways, pleasant and effective light (720 lm) requiring very little energy, sensor reach of up to 8 m.

# XLED slim S

white  
 EAN 4007841 012069  
 Article number 012069




## Technical specifications

Dimensions (L x W x H)	201 x 66 x 241 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Version	white
PU1, EAN	4007841012069
Application, place	Outdoors
Application, room	outdoors, all round the building, terrace / balcony
Colour	white
Includes corner wall mount	No
Installation site	wall
Installation	Wall, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, transparent
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	5 - 25 W
Mounting height max.	4,00 m

Sneak-by guard	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 4 m (22 m <sup>2</sup> )
Reach, tangential	r = 8 m (89 m <sup>2</sup> )
Photo-cell controller	Yes
Cover material	sticker
Luminous flux total product	720 lm
Measured luminous flux (360°)	720 lm
Total product efficiency	100 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Active and Passive Thermo Control
Soft light start	No
Time setting	2 s – 70 Min.
Main light adjustable	No
Interconnection	No

## Detection Zone

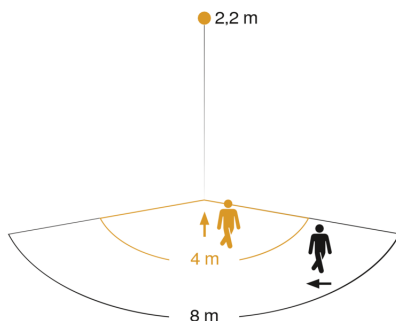

Mögliche Montagehöhe: 1,80 m – 4,00 m  
 Orange: radial  
 Schwarz: tangential

## Dimension Drawing

