


Sensor-switched outdoor light

L 600 CAM

EAN 4007841 052997



LED

14,3 w



3000K
warm-white



infrared sensor
180°



max. radius 10 m



2,4 GHz Wi-Fi



Intercom system



Camera



inclusive



IP44

Function description

Smart. Save. Intelligent. L 600 CAM is a sensor-switched camera and intercom system in one product. With integrated micro SD memory card and camera to get razor-sharp images onto the smartphone or tablet (Wi-Fi and app-based). Enclosure in aluminium and high-quality opal glass. 180° infrared motion sensor with 10 m reach. Warm-white light: 3000 K and 781 lm at 14,3 W.

Technical specifications

| | |
|---|--------------------------|
| Dimensions (L x W x H) | 131 x 78 x 305 mm |
| Mains power supply | 220 – 240 V / 50 – 60 Hz |
| Mounting height max. | 2,00 m |
| Sensor Technology | passive infrared |
| Output | 14,3 W |
| Interconnection | No |
| Luminous flux | 781 lm |
| Efficiency | 54 lm/W |
| Colour temperature | 3000 K |
| Colour Rendering Index CRI | 80-89 |
| With lamp | Yes, STEINEL LED system |
| Lamp | LED cannot be replaced |
| LED life expectancy (max. °C) | 50000 h |
| Base | without |
| LED cooling system | Passive Thermo Control |
| With motion detector | Yes |
| Detection angle | 180 ° |
| Angle of aperture | 45 ° |
| Sneak-by guard | No |
| Capability of masking out individual segments | No |
| Electronic scalability | Yes |


| | |
|----------------------------|--------------------------------|
| Mechanical scalability | No |
| Reach, radial | r = 2 m (6 m ²) |
| Reach, tangential | r = 10 m (157 m ²) |
| Photo-cell controller | Yes |
| Twilight setting | 10 – 10000 lx |
| Time setting | 60 s – 15 Min. |
| Basic light level function | Yes |
| Functions | Intercom system, Camera |
| Soft light start | Yes |
| Continuous light | selectable |
| Impact resistance | IK03 |
| IP-rating | IP44 |
| Protection class | I |
| Ambient temperature | -10 – 40 °C |
| Housing material | Aluminium |
| Cover material | Glass opal |
| Manufacturer's Warranty | 3 years |
| Settings via | Wi-Fi |
| With remote control | Yes |
| PU1, EAN | 4007841052997 |

<https://www.steinel.de>

Subject to technical modifications

09.2020 Page 1 from 2

Detection Zone

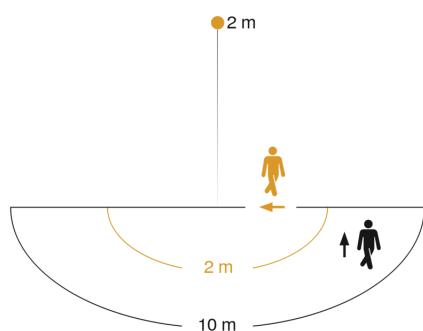


Mögliche Montagehöhe: 1,80 m – 2,00 m


Orange: radial

Schwarz: tangential

Dimension Drawing

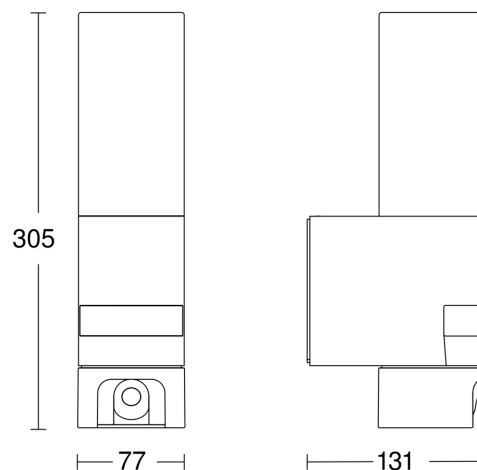

Master circuit diagram

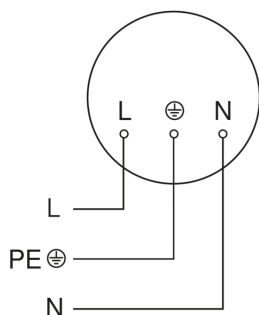

Master/slave interconnection circuit diagram

