

96535894 DIFFUSALUX 2X36W HF PS OP L840

G13	36W T26			IP 20		CE	650 °C
-----	---------	--	--	-------	--	----	--------

Diffusalux

High performance IP20 surface mounted and suspended general purpose fluorescent luminaire for 2 x 36W T26 lamp(s) with electronic - fixed output circuit. Body in white painted steel, endcaps in white polycarbonate with a curved, precision extruded opal prismatic polycarbonate diffuser. Ø21.5mm cable entry hole in the centre of the back spine with optional cable entry through each end cap. Fitting supplied with innovative "quick fix" horseshoe and sliding washers for direct screw fixing to surface, fixing centres 1200mm. Standard BESA fixings. 5 x 2 x 2,5mm² piano key terminal block. Complete with 840 lamp(s).


Dimensions: 1262 x 217 x 90 mm

Total power: 80 W


Weight: 3.7 kg



TLG_DFX2_F_ODL.jpg

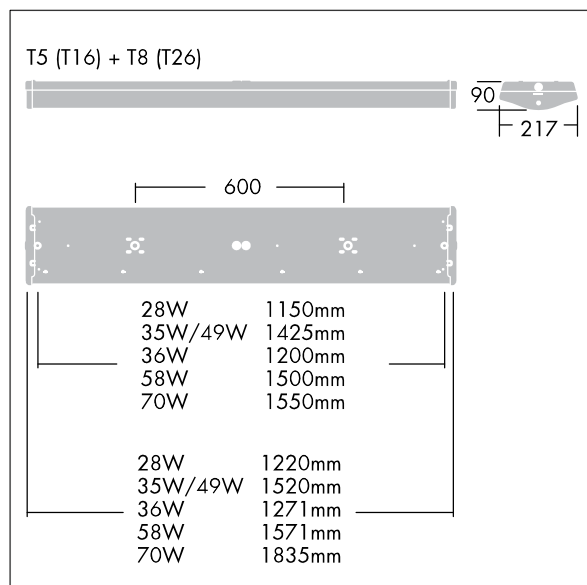

TLG_DFLX_M_LD2.wmf

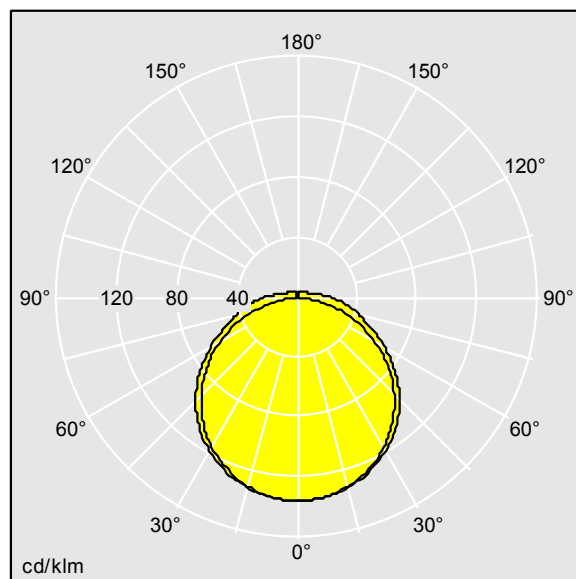

TLG_SW_I10228.ltd

Lamp position: STD - standard

Lamps: 2 x T26 / 36W

Total luminous flux: 6700 lm

Colour Rendering Index min.: 80

Ballast: HF Tridonic PC T8 PRO A2

Connected Load: 80 W Lambda = 0.97

CELMA EEI: A2

LOR: 0,45 ULOR: 0,03 DLOR: 0,42