

# Diffusalux

# THORN

## 96535894 DIFFUSALUX 2X36W HF PS OP L840




### Diffusalux

High performance IP20 surface mounted and suspended general purpose fluorescent luminaire for 2 x 36W T26 lamp(s) with electronic - fixed output circuit. Body in white painted steel, endcaps in white polycarbonate with a curved, precision extruded opal prismatic polycarbonate diffuser. Ø21.5mm cable entry hole in the centre of the back spine with optional cable entry through each end cap. Fitting supplied with innovative "quick fix" horseshoe and sliding washers for direct screw fixing to surface, fixing centres 1200mm. Standard BESA fixings. 5 x 2 x 2,5mm<sup>2</sup> piano key terminal block. Complete with 840 lamp(s).


Dimensions: 1262 x 217 x 90 mm  
 Total power: 80 W  
 Weight: 3.7 kg



TLG\_DFX2\_F\_ODL.jpg

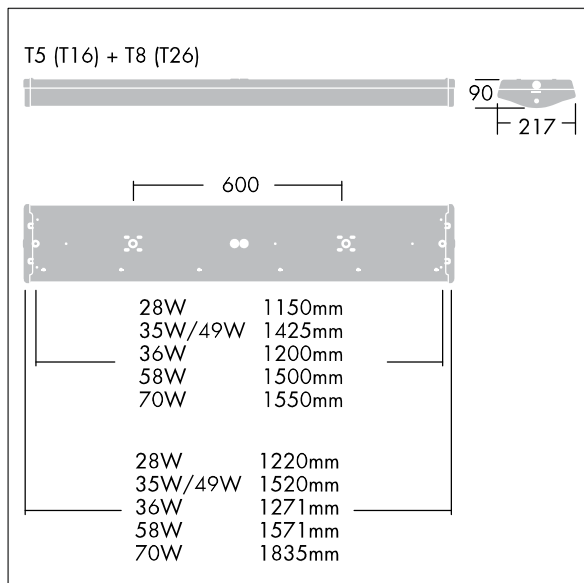

TLG\_DFLX\_M\_LD2.wmf

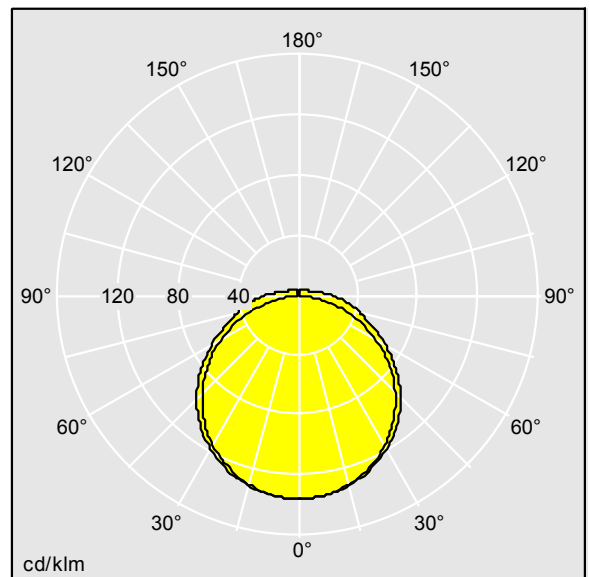

TLG\_SW\_I10228.ltd

Lamp position: STD - standard  
 Lamps: 2 x T26 / 36W  
 Total luminous flux: 6700 lm  
 Colour Rendering Index min.: 80  
 Ballast: HF Tridonic PC T8 PRO A2  
 Connected Load: 80 W Lambda = 0.97  
 CELMA EEI: A2  
 LOR: 0,45 ULOR: 0,03 DLOR: 0,42