

Diffusalux

THORN

96535897 DIFFUSALUX 2X58W HF PS CL L840




Diffusalux

High performance IP20 surface mounted and suspended general purpose fluorescent luminaire for 2 x 58W T26 lamp(s) with electronic - fixed output circuit. Body in white painted steel, endcaps in white polycarbonate with a curved, precision extruded clear prismatic polycarbonate diffuser. Ø21.5mm cable entry hole in the centre of the back spine with optional cable entry through each end cap. Fitting supplied with innovative "quick fix" horseshoe and sliding washers for direct screw fixing to surface, fixing centres 1500mm. Standard BESA fixings. 5 x 2 x 2,5mm² piano key terminal block. Complete with 840 lamp(s).


Dimensions: 1534 x 217 x 90 mm
 Total power: 123 W
 Weight: 4.5 kg



TLG_DFX2_F_CPL.jpg

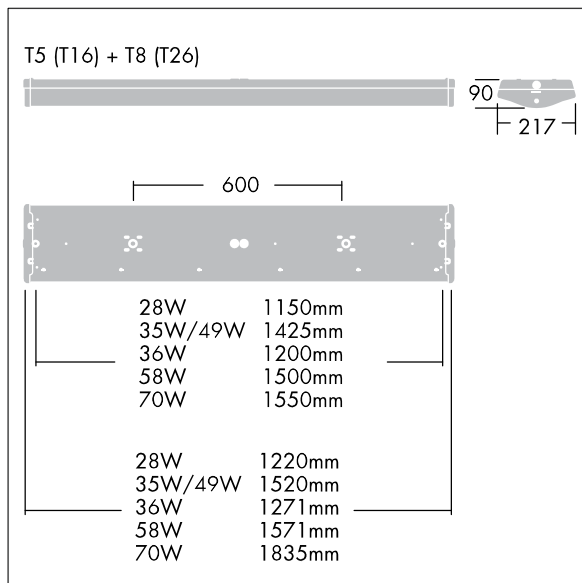

TLG_DFLX_M_LD2.wmf

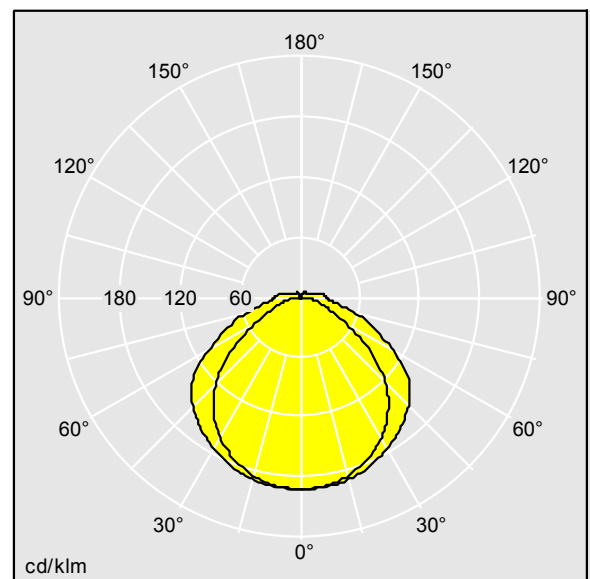

TLG_SW_I10283.ltd

Lamp position: STD - standard
 Lamps: 2 x T26 / 58W
 Total luminous flux: 10400 lm
 Colour Rendering Index min.: 80
 Ballast: HF Tridonic PC T8 PRO A2
 Connected Load: 123 W Lambda = 0.98
 CELMA EEI: A2
 LOR: 0,61 ULOR: 0,04 DLOR: 0,57