

# Diffusalux

# THORN

## 96535899 DIFFUSALUX 2X70W HF PS CL L840




### Diffusalux

High performance IP20 surface mounted and suspended general purpose fluorescent luminaire for 2 x 70W T26 lamp(s) with electronic - fixed output circuit. Body in white painted steel, endcaps in white polycarbonate with a curved, precision extruded clear prismatic polycarbonate diffuser. Ø21.5mm cable entry hole in the centre of the back spine with optional cable entry through each end cap. Fitting supplied with innovative "quick fix" horseshoe and sliding washers for direct screw fixing to surface, fixing centres 1550mm. Standard BESA fixings. 5 x 2 x 2,5mm<sup>2</sup> piano key terminal block. Complete with 840 lamp(s).


Dimensions: 1835 x 217 x 90 mm  
 Total power: 150 W  
 Weight: 4.7 kg



TLG\_DFX2\_F\_CPL.jpg

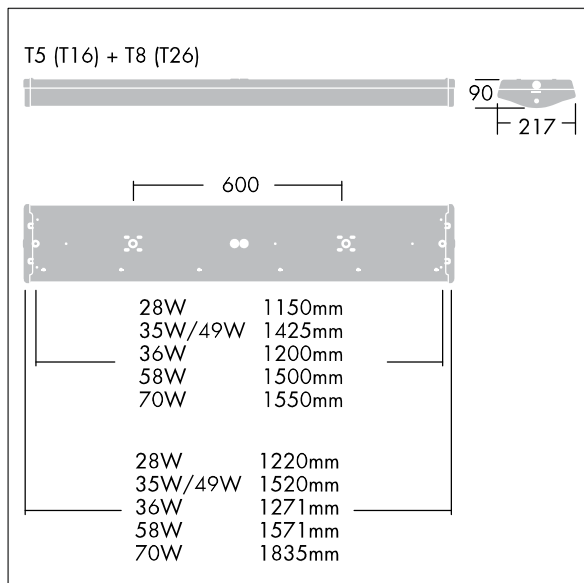

TLG\_DFLX\_M\_LD2.wmf

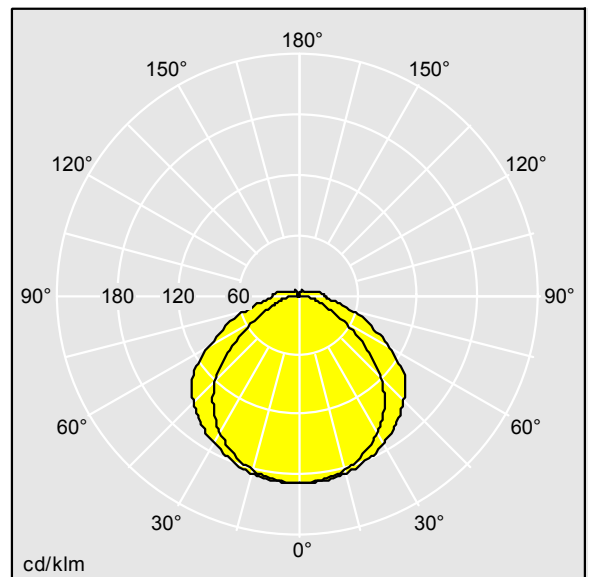

TLG\_SW\_I10295.ltd

Lamp position: STD - standard  
 Lamps: 2 x T26 / 70W  
 Total luminous flux: 13100 lm  
 Colour Rendering Index min.: 80  
 Ballast: HF Tridonic PC PRO  
 Connected Load: 150 W Lambda = 0.97  
 LOR: 0,60 ULOR: 0,04 DLOR: 0,56