

Popular Range Complete Luminaires

THORN

96234310 POPPACK PPC 1X36W LPF PR LI640

G13	36W T26	EN 60598		IP20	Ta25			650 °C
-----	---------	-------------	---	------	------	---	---	--------

The only one called 'Pop Pack', the original fluorescent batten

Batten luminaire for 1 x 36W T26 lamp(s). magnetic inductive (TLG low power factor) circuit. Body: steel - white stoved enamel. Complete with clear prismatic polysterene diffuser, lamp(s) and spring loaded white plastic end caps.


Dimensions : 1200 x 77 x 110 mm

Total power : 43 W


Weight: 2.3 kg



TLG_POPR_F_TEP.jpg

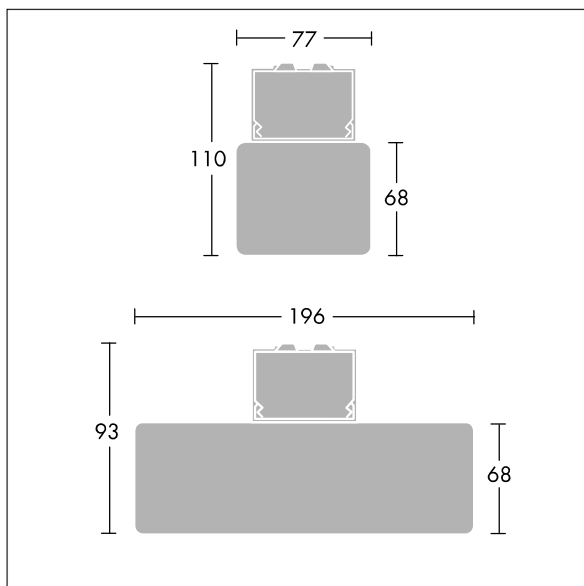

TLG_POPR_M_LD2.wmf

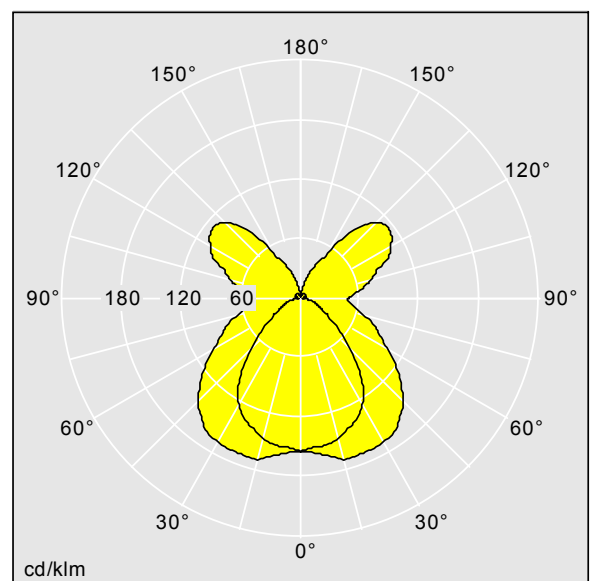

TLG_SP_R0001212.ltd

Lamp position:STD - standard


Lamp:T26 36W

LOR: 0,79 ULOR: 0,28 DLOR: 0,51

Popular Range Complete Luminaires

96234310 POPPACK PPC 1X36W LPF PR LI640

THORN

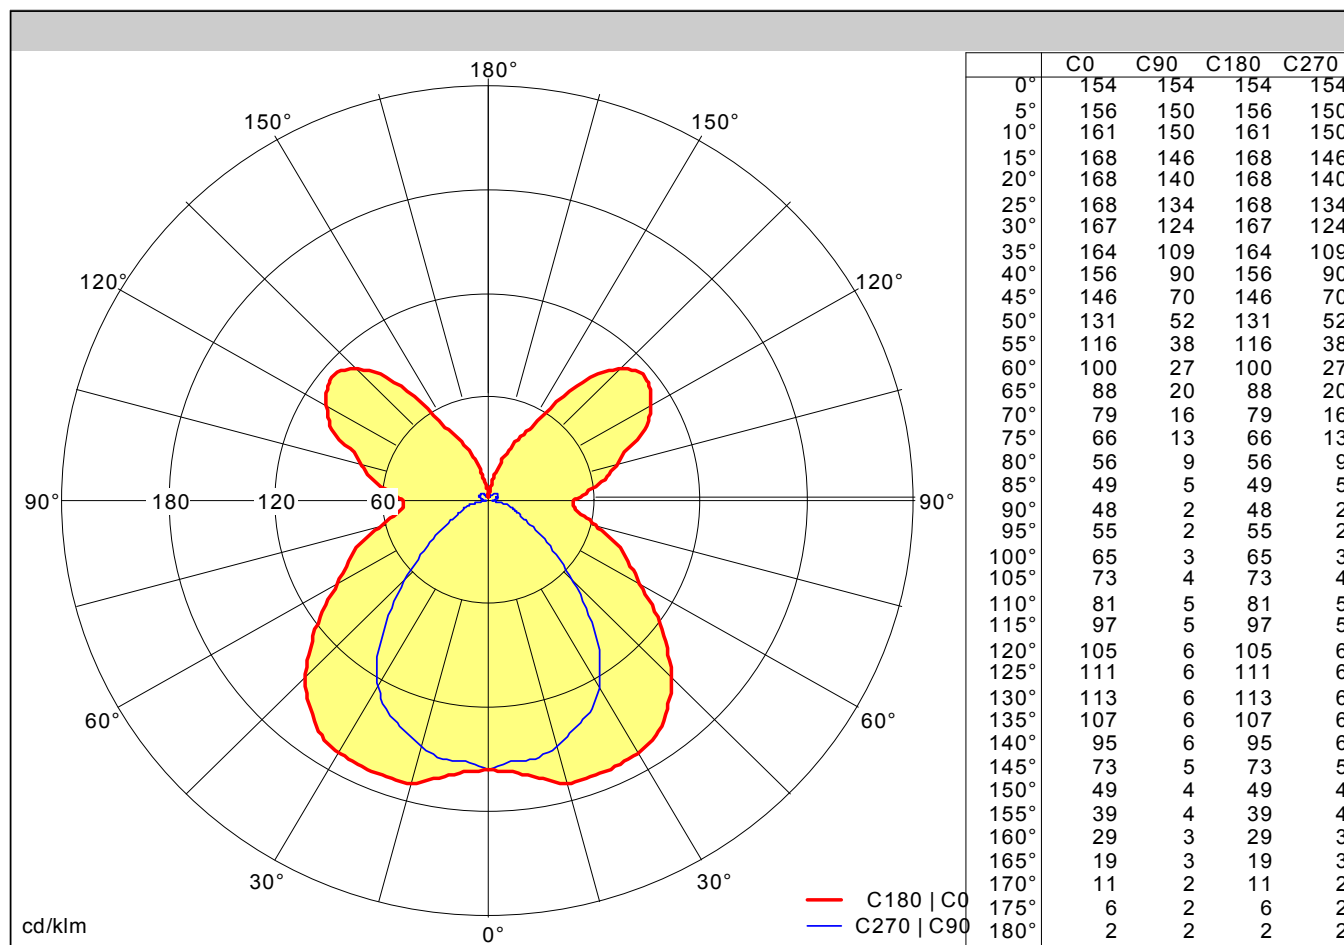

Light output ratio	
LOR	79 %
ULOR	28 %
DLOR	51 %
FFR	0.55 (35:65)
BLF	1.00

Glare Evaluation	
X = 4 H, Y = 8 H	S = 1.00 H
Reflection factors	70/50/20
UGR transversal	<22
UGR axial	<16

Classification	
LiTG	B32
LG7	
BZ	BZ4/1.5/BZ5
UTE	0.51 E + 0.28 T
Flux Codes	230 382 466 513 794

Utilization Factors									
Room Reflectance Ceiling/Walls/Floor	Room Index								
	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
70 / 50 / 20	NA	47	52	56	61	64	67	70	72
70 / 30 / 20	NA	42	47	51	56	60	63	67	69
70 / 10 / 20	NA	38	43	47	52	56	59	64	67
50 / 50 / 20	NA	43	47	50	54	57	59	62	64
50 / 30 / 20	NA	38	42	46	50	54	56	59	61
50 / 10 / 20	NA	35	39	42	47	51	53	57	59
30 / 50 / 20	NA	38	42	44	48	50	52	54	56
30 / 30 / 20	NA	35	38	41	45	48	50	52	54
30 / 10 / 20	NA	32	36	39	43	46	48	51	53
0 / 0 / 0	NA	27	30	32	35	38	39	41	43
According to CIBSE Technical Memorandum No. 5 1980						SHR Nom =	1.75		
						SHR Max =	1.78		
						SHR Max TR =	2.27		

Photometric data file: TLG_SP_R0001212.ltd