

Punch

96211517 PUNCH 2X58W T26 CP DMB BESA

G13	58W T26	EN 60598	F	IP20	⊕	⚡	CE	850°C
-----	---------	----------	---	------	---	---	----	-------

A slim, surface mounted T8 luminaire with modern aesthetics.

A slim, surface mounted luminaire with modern aesthetics for 2 x 58W T26 lamp. Body in white painted steel sheet with white plastic end caps and a double parabolic specular aluminium louvre. Central cable entries and BESA box clusters, additional keyhole slots for screw fixing.


Dimensions : 1543 x 209 x 85 mm

Total power : 142.2 W


Weight: 5.7 kg



TLG_PNCH_F_BD60.jpg

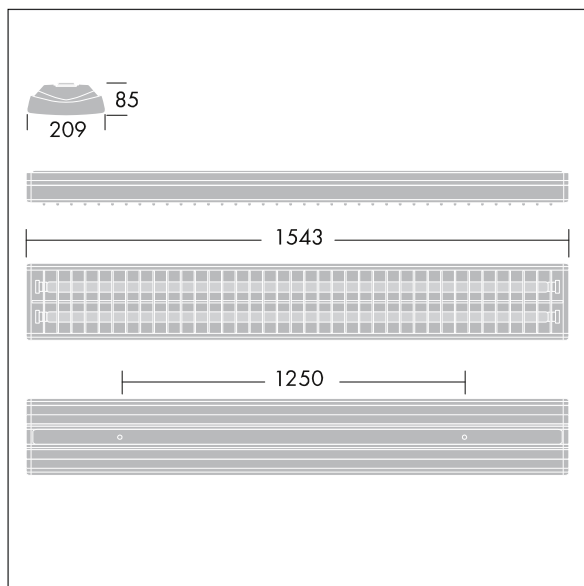

TLG_PNCH_M_2X58CPE3.wmf

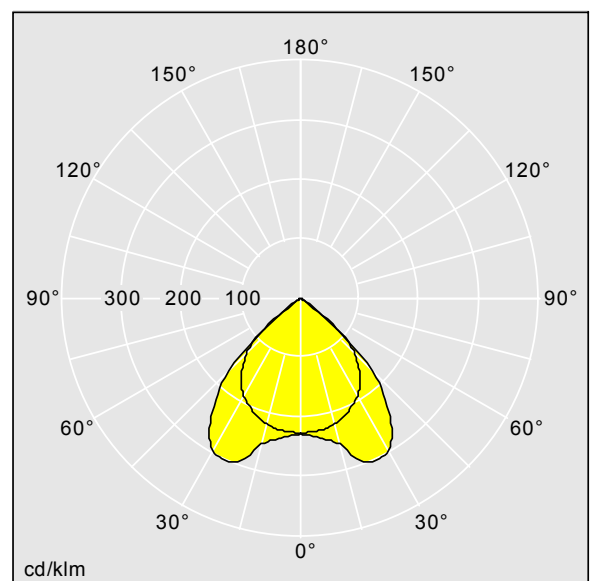

TLG_SP_r0024715.ltd


Lamp position:STD - standard

Lamp:T26 58W

LOR: 0,52 ULOR: 0,00 DLOR: 0,52

Maintenance category:D

96211517 PUNCH 2X58W T26 CP DMB BESA

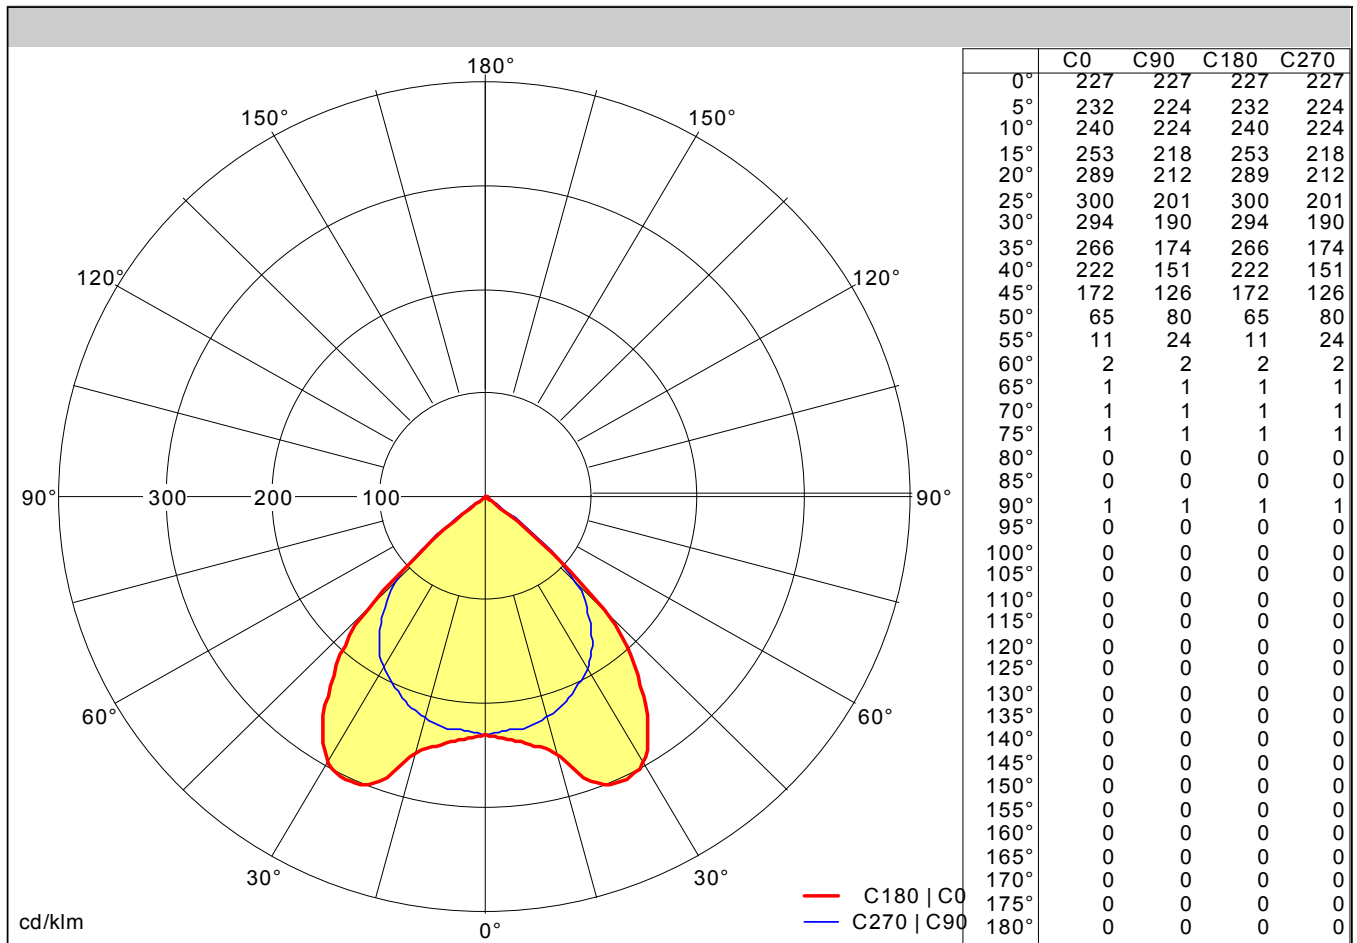

Light output ratio	
LOR	52 %
ULOR	0 %
DLOR	52 %
FFR	0.00 (0:100)
BLF	1.00

Glare Evaluation	
X = 4 H, Y = 8 H	S = 1.00 H
Reflection factors	70/50/20
UGR transversal	<13
UGR axial	<13
65° < 200 cd/m²	

Classification	
LiTG	A60
LG7	65° < 200 cd/m²
BZ	BZ1
UTE	0.52 B
Flux Codes	376 515 517 518 518

Utilization Factors									
Room Reflectance Ceiling/Walls/Floor	Room Index								
	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
70 / 50 / 20	NA	48	50	51	53	55	55	57	57
70 / 30 / 20	NA	46	48	49	52	53	54	55	56
70 / 10 / 20	NA	44	46	48	50	52	53	55	56
50 / 50 / 20	NA	47	49	50	52	53	54	55	55
50 / 30 / 20	NA	45	47	49	51	52	53	54	54
50 / 10 / 20	NA	44	46	47	49	51	52	53	54
30 / 50 / 20	NA	46	48	49	51	51	52	53	53
30 / 30 / 20	NA	44	46	48	49	51	51	52	53
30 / 10 / 20	NA	43	45	47	49	50	51	52	52
0 / 0 / 0	NA	42	44	45	47	48	49	49	50

According to CIBSE Technical Memorandum No. 5 1980

SHR Nom =	1.75
SHR Max =	1.86
SHR Max TR =	2.04

Photometric data file: TLG_SP_r0024715.ltd