

# Punch

# THORN

## 96500971 PUNCH 2X58W T26 HF DMB E3 BESA

G13	58W T26	EN 60598-2-22		IP20			850°C	
-----	---------	---------------	--	------	--	--	-------	--


A slim, surface mounted T8 luminaire with modern aesthetics.

A slim, surface mounted luminaire with modern aesthetics for 2 x 58W T26 lamp. Body in white painted steel sheet with white plastic end caps and a double parabolic specular aluminium louvre. Central cable entries and BESA box clusters, additional keyhole slots for screw fixing. Emergency version.


Dimensions : 1543 x 209 x 85 mm  
Total power : 137 W  
Weight: 5.28 kg



TLG\_PNCH\_F\_BD60.jpg

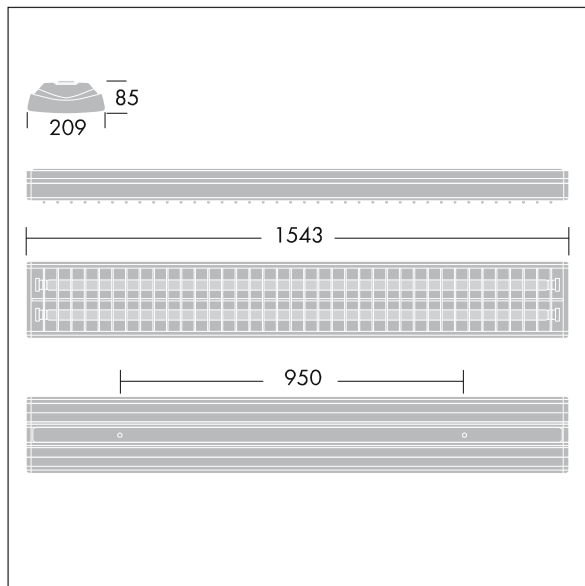


TLG\_PNCH\_M\_2X58HF.wmf

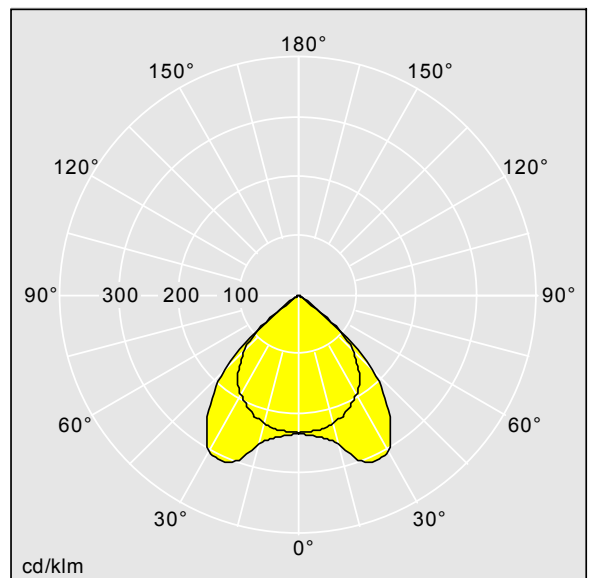

TLG\_SP\_r0024714.ltd

Lamp position:STD - standard  
Lamp:T26 58W  
LOR: 0,53 ULOR: 0,00 DLOR: 0,53  
Maintenance category:D

## 96500971 PUNCH 2X58W T26 HF DMB E3 BESA

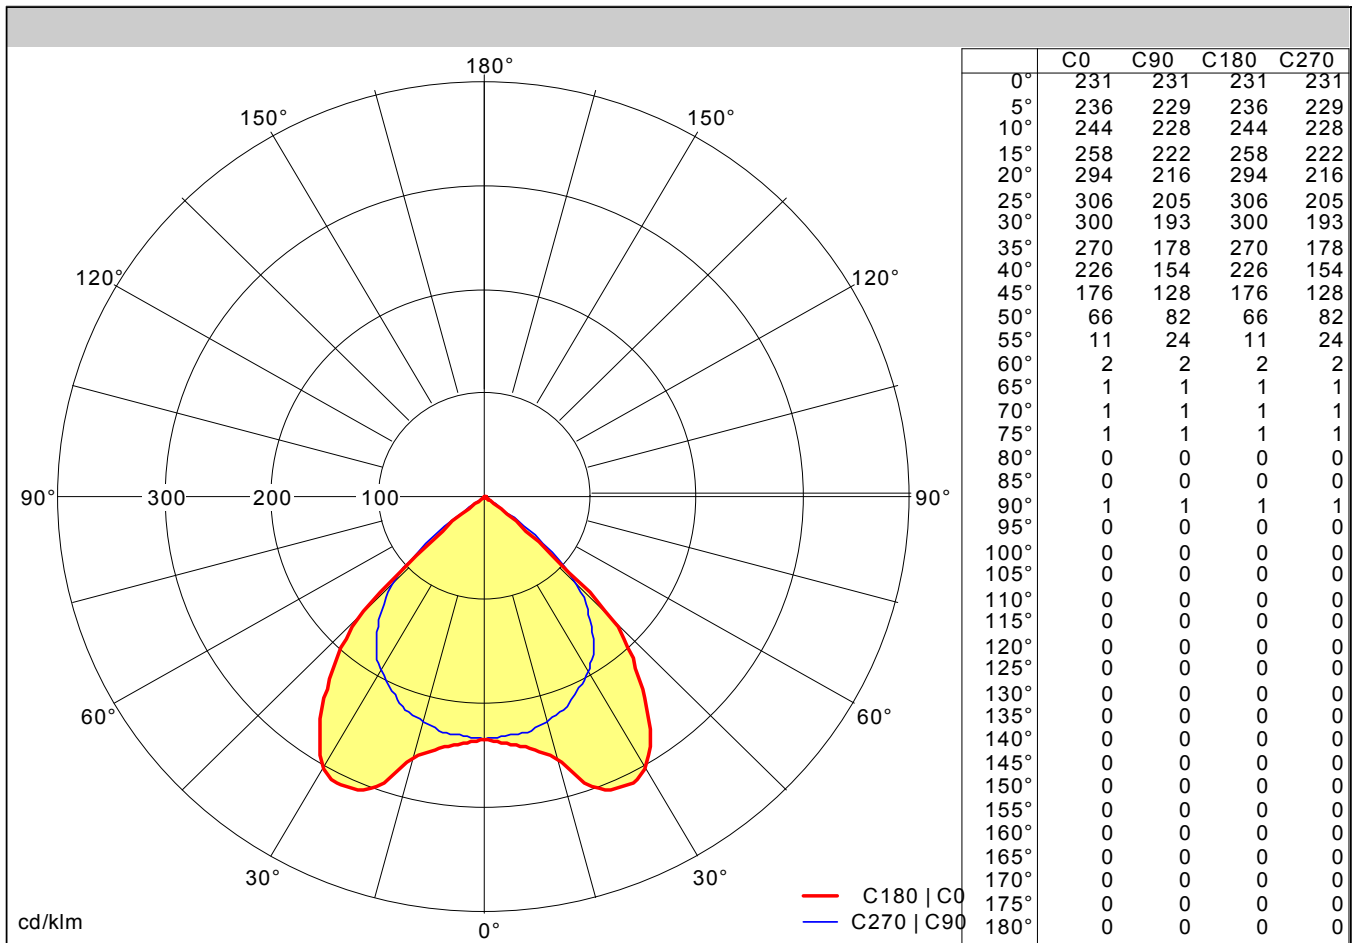

Light output ratio	
LOR	53 %
ULOR	0 %
DLOR	53 %
FFR	0.00 (0:100)
BLF	1.00

Glare Evaluation	
X = 4 H, Y = 8 H	S = 1.00 H
Reflection factors	70/50/20
UGR transversal	<13
UGR axial	<13
65° < 200 cd/m²	

Classification	
LiTG	A60
LG7	65° < 200 cd/m²
BZ	BZ1
UTE	0.53 B
Flux Codes	383 525 527 528 528

Utilization Factors									
Room Reflectance Ceiling/Walls/Floor	Room Index								
	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
70 / 50 / 20	NA	49	51	52	54	56	57	58	58
70 / 30 / 20	NA	46	49	50	53	54	55	57	57
70 / 10 / 20	NA	45	47	49	51	53	54	56	57
50 / 50 / 20	NA	48	50	51	53	54	55	56	56
50 / 30 / 20	NA	46	48	50	52	53	54	55	55
50 / 10 / 20	NA	44	47	48	50	52	53	54	55
30 / 50 / 20	NA	47	49	50	52	52	53	54	54
30 / 30 / 20	NA	45	47	49	50	52	52	53	54
30 / 10 / 20	NA	44	46	48	50	51	52	53	53
0 / 0 / 0	NA	43	45	46	48	49	49	50	51

According to CIBSE Technical Memorandum No. 5 1980

SHR Nom =	1.75
SHR Max =	1.86
SHR Max TR =	2.04

Photometric data file: TLG\_SP\_r0024714.ltd