
Data sheet

TIMEGUARD Light/LED Lighting

LEDPRO70B - 70W LED Professional Rewirable Floodlight, Black

Product Image & Line Diagram

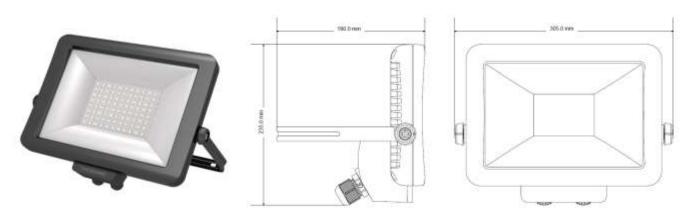

Technical Data

General	
Operating Voltage	230v AC
Frequency	50Hz
Installation Type	Surface Mount
Class Rating	Class I
Lamp Wattage	70W LED Non replaceable lamp
Energy Usage	70kWh/1000h
Energy Efficiency	Class A
Lumen Output	7000lm typical
Colour Temperature	5000K
Operating Temperature	-20°C to +40°C
Lamp Tilt Adjustment	360°
Accessories (Included)	Instructions, Fittings, U Bracket, M20 Glands
Accessories (Optional)	LEDPROPCB Photocell, LEDPROSLB PIR sensor,
	LEDPRORFKB RF Remote Controlled PIR sensor
Dimensions	Height 235mm, Width 305mm, Depth 66mm (190mm Inc. bracket)
Mounting Centres	260mm
IP Rating	IP65
Weight	1530g
EAN	5012483014806
Designed In Accordance To	BS EN 62493:2010, BS EN60598-2-1, BS EN 61347-2-13 Includes updates and amendments.
Guarantee Period	3 Years
Construction	
Body	Polycarbonate
Bracket	Painted Aluminium



Article Number: LEDPRO70B DS090718V1

