



T80Z Slimline

electric shower

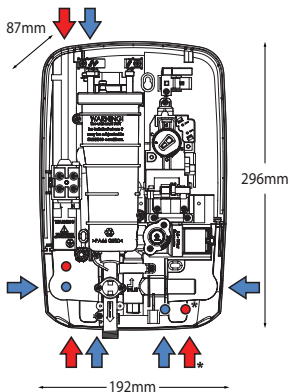


Diagram Key:

- ➡ ● Water Entry Points
 ➡ ● Cable Entry Points
*Only suitable for (maximum) 6mm² cable

**At running pressure/flow 0.7 Bar at 8 l/min (1.2 Bar at 11 l/min for 10.5kW) the shower will continue to operate at a reduced performance.

Dimensions given are approximate

Temperature Control	Stabilised
Power Ratings	8.5 kW, 9.5 kW, 10.5 kW
Inlet Connection	15mm compression
Water Entry Points	Top, bottom, side bottom, back (left hand side of unit) Bottom, side bottom, back (right hand side of unit)
Cable Entry Points	Top, bottom, back (left hand side of unit) Bottom, back (right hand side of unit)
Outlet Connection	1/2" BSP
Plumbing System	Cold water only
Minimum Running Pressure/Flow	1.0 Bar @ 8 l/min 1.5 Bar @ 11 l/min for 10.5 kW**
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, BSI Kitemark
Guarantee	2 years

Operating Features

- Swivel-fit™ – A 180° fully reversible water inlet providing flexibility for new or replacement installations
- Slimline design - for a more discrete appearance
- Separate temperature and power controls
- Recessed controls
- Start/Stop with illumination
- Illuminated 'low pressure' indicator - operates when the water pressure is low or insufficient
- Rub Clean showerhead – 5 spray pattern

Finish	Power	Code
Chrome	9.5 kW	SP8CHR9ZSLM
Chrome	10.5 kW	SP8CHR1ZSLM
White/Chrome	8.5 kW	SP8008ZSLM
White/Chrome	9.5 kW	SP8009ZSLM
White/Chrome	10.5 kW	SP8001ZSLM