

T80Z Thermostatic electric shower

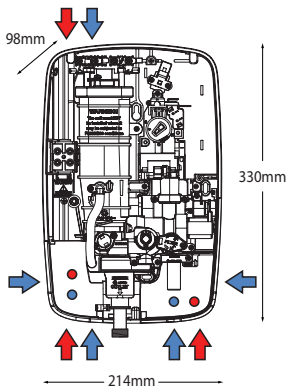



Diagram Key:

 ● Water Entry Points
  ● Cable Entry Points

*At running pressure/flow 0.7 Bar at 8 l/min (1.2 Bar at 11 l/min for 10.5kW) the shower will continue to operate at a reduced performance.

Dimensions given are approximate



Operating Features

- Thermostatic temperature control
- Push button Start/Stop
- Separate temperature and power controls
- Illuminated 'Power on' indicator
- 'Low pressure' indicator - operates when the water pressure is low or insufficient
- Stylish overlapping front cover design
- Colour contrasting knob trims
- Rub Clean showerhead – 5 spray pattern

Finish	Power	Code
Chrome	9.5 kW	SP8CHR9ZTHM
Chrome	10.5 kW	SP8CHR1ZTHM
White/Chrome	8.5 kW	SP8008ZTHM
White/Chrome	9.5 kW	SP8009ZTHM

Temperature Control	Thermostatic
Power Ratings	8.5 kW, 9.5 kW, 10.5 kW
Inlet Connection	15mm compression
Water Entry Points	Top, bottom, side bottom, back (left hand side of unit) Bottom, side bottom, back (right hand side of unit)
Cable Entry Points	Top, bottom, back (left hand side of unit) Bottom, back (right hand side of unit)
Outlet Connection	1/2" BSP
Plumbing System	Cold water only
Minimum Running Pressure/Flow	1.0 Bar @ 8 l/min 1.5 Bar @ 11 l/min for 10.5 kW*
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, BSI Kitemark
Guarantee	2 years