

Product information

# AS2000SR

Silent Running Thermostatic Power Shower

**TRITON**

See you first thing Britain



Intertek



KM 52019  
BS EN 60335-2-35

## Product information

# AS2000SR

## Silent Running Thermostatic Power Shower

# TRITON

See you first thing Britain

### Shower

Triton's **NEW** silent running thermostatic power shower is so quiet that when the water is running, you won't hear the pump, and as such has been awarded the Quiet Mark award of approval. The AS2000SR is the perfect solution for those with low pressure systems, providing a great flow rate of up to 14 litres per minute. Its continuous running performance ensures there is no waiting around in between showers for busy families.





- Easy to use start/stop button
- **Thermostatic control** constantly regulates the temperature providing you with precise control and a safer showering experience
- **Adjustable maximum temperature stop** reduces the risk of accidentally turning the temperature too high
- **Multiple cable and water entry points** including the Triton **Swivel Fit Water Inlet**, enabling top, rear or bottom entry for ease of installation
- **Larger footprint** makes it an ideal replacement for existing Triton power shower models
- Large **3 mode**, rub clean shower head
- **1.5m** anti-twist hose
- **1 year guarantee**, full parts and labour

### Features

|                               |  |
|-------------------------------|--|
| Temperature Control           | Thermostatic   |
| Supply source                 | Gravity fed cold and hot supplies only   |
| Cold water cistern minimum    | 115 litres   |
| Inlet Connection              | 15mm dual entry push fittings  |
| Outlet connections            | 1/2" BSP   |
| Pipe Centres                  | 26mm   |
| Minimum static inlet pressure | 0.0075 bar (75mm head)   |
| Maximum static inlet pressure | 1.0 bar (10m head)   |
| Isolating valves              | Full way type <b>MUST</b> be installed. Pipework layouts and connections <b>MUST</b> be such that other draw-offs will not affect water supplies to the shower   |
| Electrical Supply voltage     | 230v/240v  |
| Supply rating                 | 3 amp  |
| Minimum cable size            | 0.75mm two core L-N  |
| RCD unit                      | A 30mA residual current device must be installed (either part of the consumer unit or separate). This shower must be permanently connected to a 3 amp fused connection unit and be provided with means for disconnection |
| Shower performance            | Up to 14 litres per minute   |

### Product Codes

AS2000SR Thermostatic Power Shower | TAS2000SR

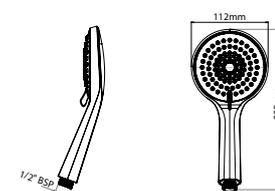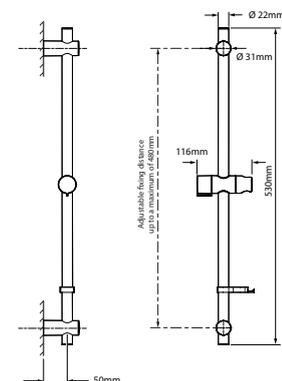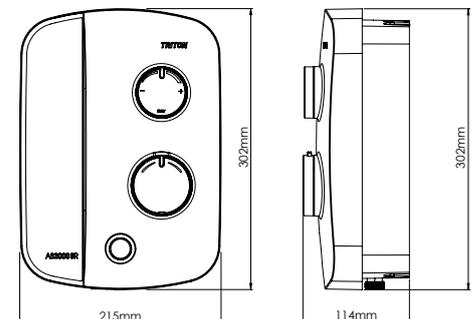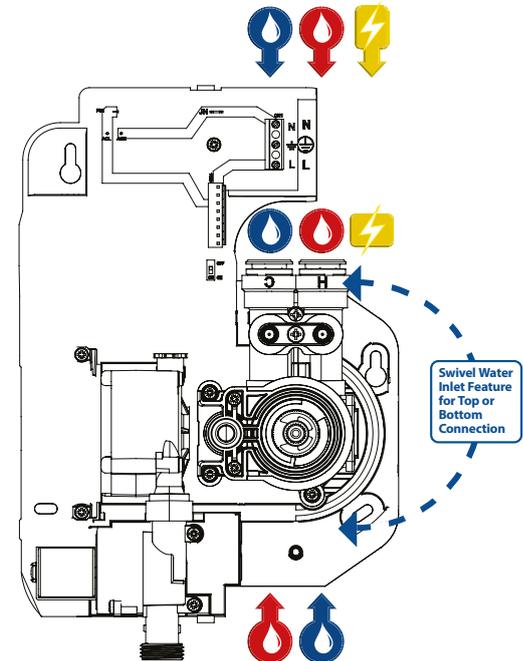

Call: 02476 324 776 | Email: [specification@tritonshowers.co.uk](mailto:specification@tritonshowers.co.uk) | Web: [www.tritonshowers.co.uk](http://www.tritonshowers.co.uk)