


AVON



UNAVBACH
Dual control - chrome

UNAVBAGD
Dual control - gold

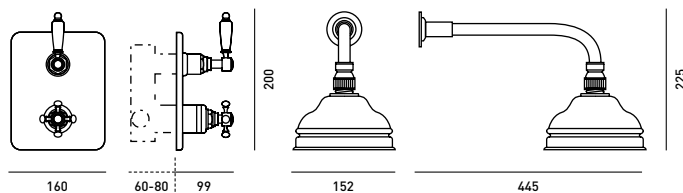

Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	3/4" BSP
Connections: Outlet	3/4" BSP top
Water supplies	Rising, falling or rear entry
Building in-depth	60 - 80mm