


| Mixer valve type        | Pressure compensating         |
|-------------------------|-------------------------------|
| Operation               | Dual control                  |
| Pressure range          | 0.5 bar - 5 bar               |
| Maximum static pressure | 10 bar                        |
| Minimum flow required   | 8 litres per minute           |
| to both inlets          |                               |
| Plumbing system         | High water pressure only,     |
|                         | nominally equal pressures     |
| Connections: Inlet      | 1/2" BSP                      |
| Connections: Outlet     | 1/2" BSP bottom               |
| Water supplies          | Rising, falling or rear entry |
| Inlet fittings supplied | Dog leg (see page 27)         |
|                         |                               |



| Pressure compensating     |
|---------------------------|
| Dual control              |
| 1 bar - 5 bar             |
| 10 bar                    |
| 8 litres per minute       |
|                           |
| High water pressure only, |
| nominally equal pressures |
| 3/4" BSP                  |
| 1/2" BSP bottom           |
| Rising only               |
|                           |

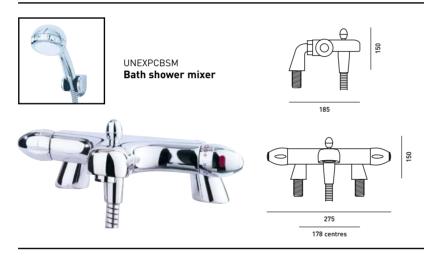