


THAMES




UNTHEXCM
Exposed

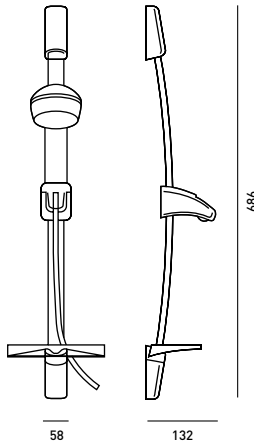

58

132

686

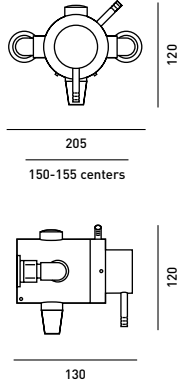

205

150-155 centers

130


120

120

Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	1/2" BSP
Connections: Outlet	1/2" BSP top or bottom
Water supplies	Rising, falling or rear entry via swivel inlet elbows




UNTHBTCM
Built-in

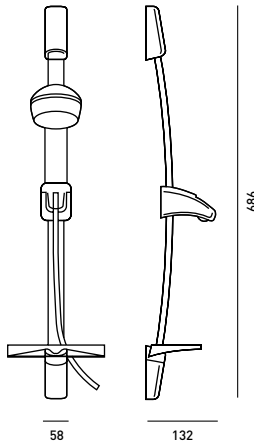

58

132

686

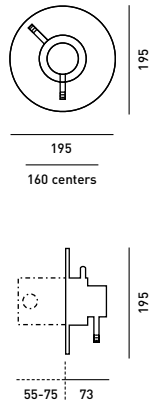

195

160 centers

55-75 73


195

195

Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	Flat face union fittings
Connections: Outlet	1/2" BSP top or bottom
Water supplies	Rising, falling or rear entry
Building in-depth	55-75mm




UNTHDCMX
Dual control

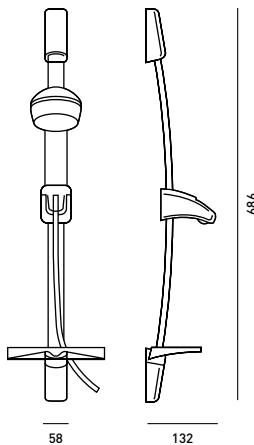

58

132

686

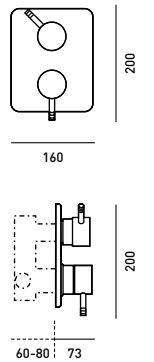

160

60-80 73

200

200


Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	3/4" BSP
Connections: Outlet	3/4" BSP top
Water supplies	Rising, falling or rear entry
Building in-depth	60-80mm

THAMES




Only suitable for high pressure systems


UNTHTPBAM
Basin mixer with pop-up waste




UNTHTP1-2
Basin taps




UNTHTP3-4
Bath taps




ATH005CP
Frosted glass tumbler & holder




ATH010CP
Glass toilet brush & holder




ATH246CP
Single towel rail

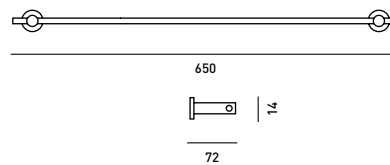


ATH003CP
Glass shelf




ATH013CP
18" Swivel mirror & brackets




ATH012CP
Robe hook




ATH004CP
Glass soap dish & holder



ATH001CP
Toilet roll holder





ATH002CP
Towel ring



AIRE




**UNAITHBM
Bar mixer**

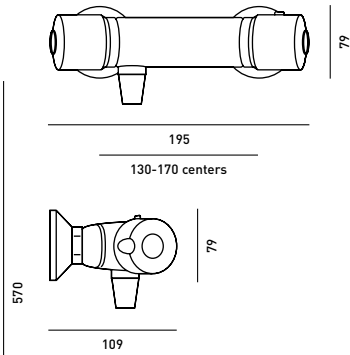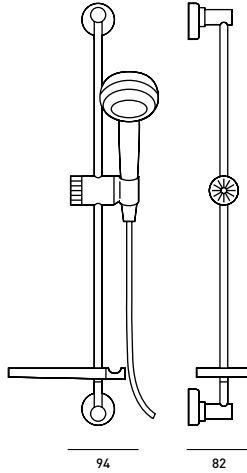

Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.2 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	1/2" BSP
Connections: Outlet	1/2" BSP bottom
Water supplies	Rising, falling or rear entry
Inlet fittings supplied	Dog leg (see page 27)




**UNAITHBSM
Bath shower mixer**

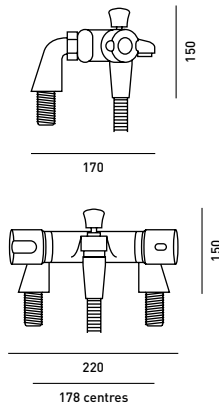


Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	High water pressure only, nominally equal pressures
Connections: Inlet	3/4" BSP
Connections: Outlet	1/2" BSP bottom
Water supplies	Rising only


**UNAITPBAM
Basin mixer with pop-up waste**

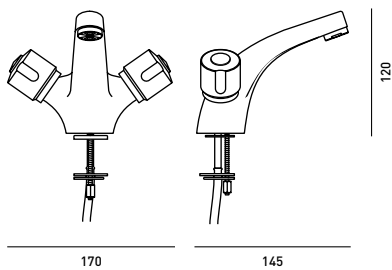



**UNAITP1-2
Basin taps**



**UNAITP3-4
Bath taps**





**UNAITPBF
Bath filler**



EXE




UNEXPCBM
Bar mixer

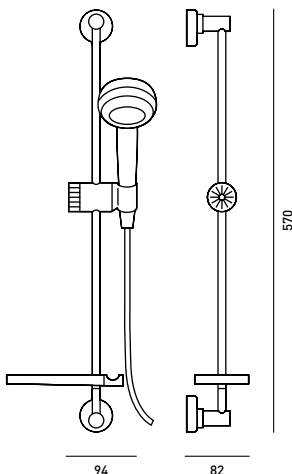

Mixer valve type	Pressure compensating
Operation	Dual control
Pressure range	0.5 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	High water pressure only, nominally equal pressures
Connections: Inlet	1/2" BSP
Connections: Outlet	1/2" BSP bottom
Water supplies	Rising, falling or rear entry
Inlet fittings supplied	Dog leg (see page 27)



UNEXPCBSM
Bath shower mixer

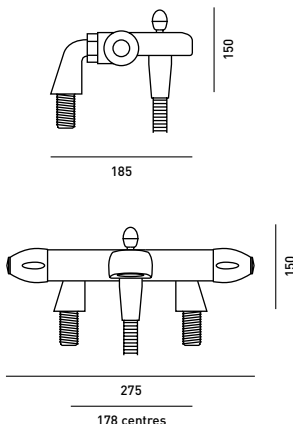


Mixer valve type	Pressure compensating
Operation	Dual control
Pressure range	1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	High water pressure only, nominally equal pressures
Connections: Inlet	3/4" BSP
Connections: Outlet	1/2" BSP bottom
Water supplies	Rising only



UNEXTPBAM
Basin mixer with pop-up waste





UNEXTP1-2
Basin taps



UNEXTPBF
Bath filler

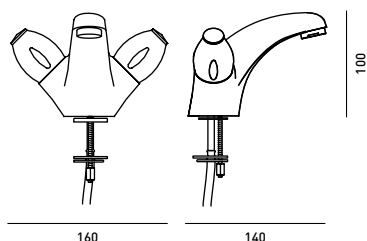



UNEXTP3-4
Bath taps



NENE




UNNETHBM
Bar mixer

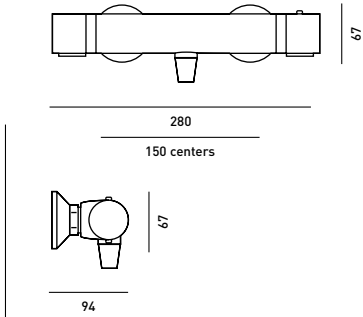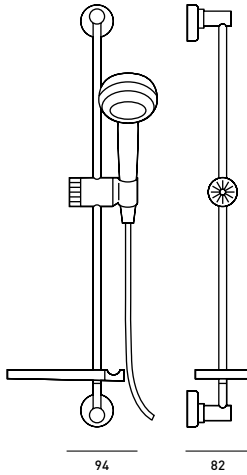


Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.2 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	1/2" BSP
Connections: Outlet	1/2" BSP bottom
Water supplies	Rising, falling or rear entry
Inlet fittings supplied	Straight (see page 27)




UNNETP1-2
Basin taps




UNNETP3-4
Bath taps




ANE004CP
Glass soap dish & holder




AWE015CP
Liquid soap dispenser



ANE014CP
Wire soap basket



ANE009CP
Robe hook





NENE




ANE186CP
Small Towel rail


ANE006CP
Large Towel rail

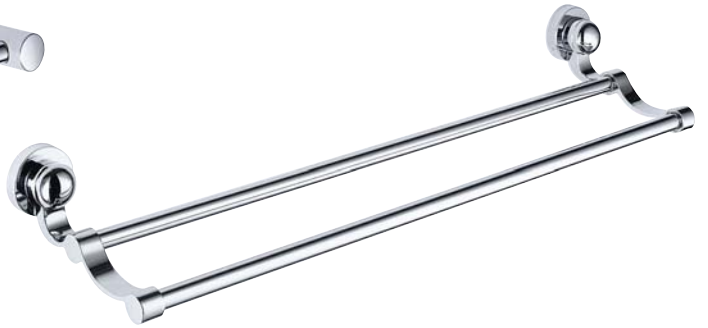


ANE246CP
Double towel rail




ANE003CP
Glass shelf




ANE005CP
Frosted glass
tumbler & holder




ANE010CP
Glass toilet brush
& holder




ANE013CP
18" Mirror swivel
& brackets



ANE001CP
Toilet roll holder




ANE002CP
Towel ring




E D E N



UNEDMBSM
Bath shower mixer



230
178 centres



170


Mixer valve type	Manual
Operation	Dual control
Pressure range	0.1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	3/4" BSP
Connections: Outlet	1/2" BSP
Water supplies	Rising



UNEDTPBAM
Basin mixer with pop-up waste




UNEDBSTP
Basin taps



115


UNEDTPBF
Bath filler

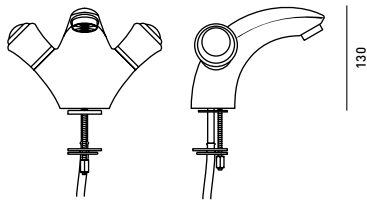


180

160

UNEDBTTP
Bath taps



110

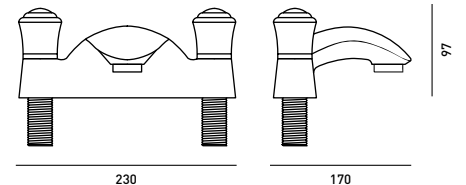

230
178 centres


170

97



AED186CP
Small Towel rail

AED246CP
Large Towel rail



380



50

90



685



50

80

AED003CP
Glass shelf




600



50

120

AED002CP
Towel ring




170

45

155

AED005CP
Frosted glass tumbler & holder



150




95

110


EDEN




AED013CP
18" Swivel mirror

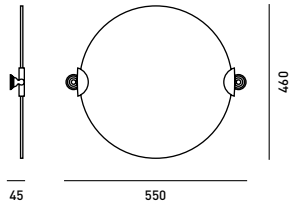


AEDH10CP
Wall mounted toilet brush & holder




AED010CP
Toilet brush & holder




AED001CP
Toilet roll holder




AED014CP
Wire soap basket




AED004CP
Glass soap dish & holder



AED009CP
Robe hook



AVON

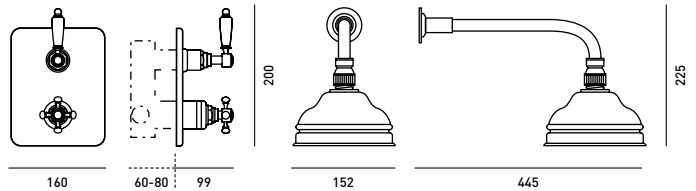

UNAVBACH
Dual control - chrome


UNAVBAGD
Dual control - gold

Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	3/4" BSP
Connections: Outlet	3/4" BSP top
Water supplies	Rising, falling or rear entry
Building in-depth	60 - 80mm


TYNE




UNTYTHBM
Bar mixer

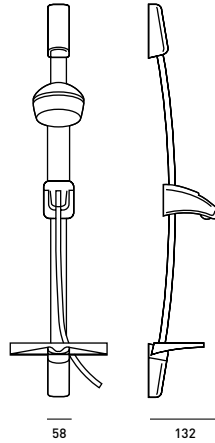

58 132



308
150 centres




100


Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	1/2" BSP
Connections: Outlet	1/2" BSP bottom
Water supplies	Rising, falling or rear entry
Inlet fittings supplied	Straight (see page 27)



UNTYTHBSM
Bath shower mixer



300
180 centres




200


Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	High water pressure only, nominally equal pressure
Connections: Inlet	3/4" BSP
Connections: Outlet	1/2" BSP bottom
Water supplies	Rising only



UNTYTPBAM
Basin mixer with pop-up waste




160



191




UNTYTP1-2
Basin taps



115




UNTYTP3-4
Bath taps




130



UNTYTPBF
Bath filler




170



230


178 centers

DART

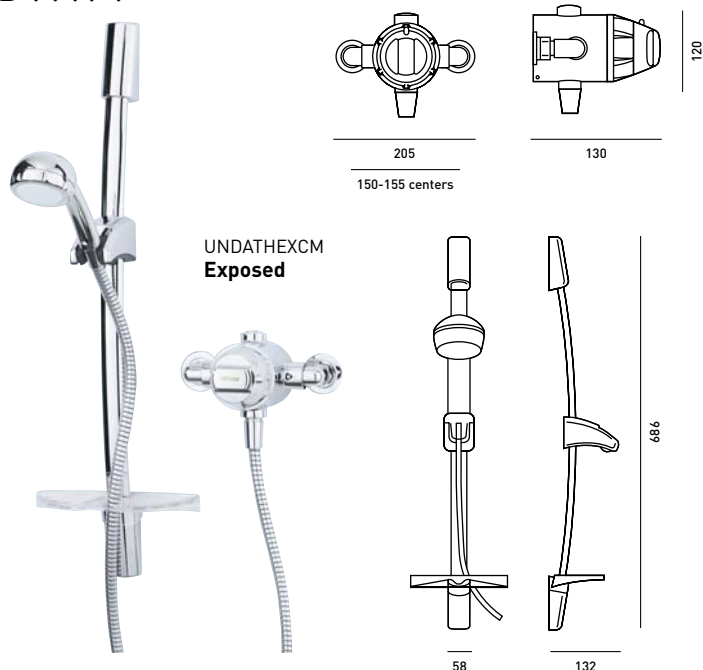

UNDATHEXCM
Exposed

Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	1/2" BSP
Connections: Outlet	1/2" BSP bottom
Water supplies	Rising, falling or rear entry via swivel inlet elbows

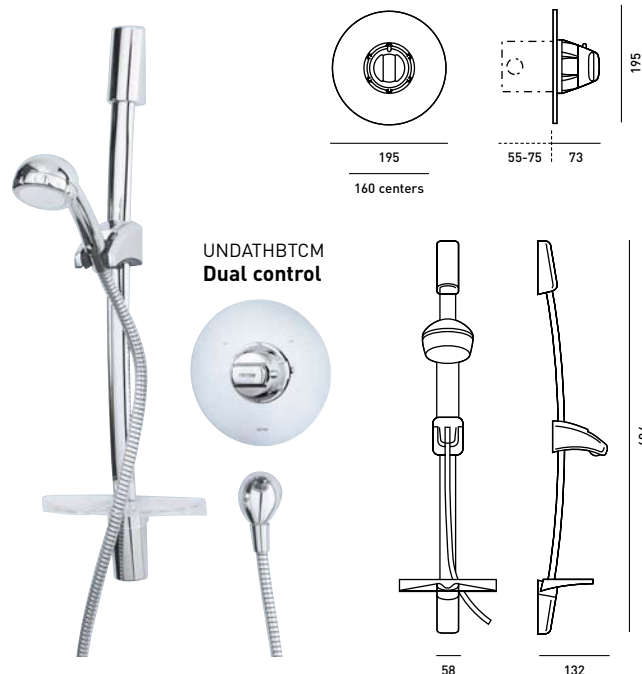

UNDATHTBCM
Dual control

Mixer valve type	Thermostatic
Operation	Dual control
Pressure range	0.1 bar - 5 bar
Maximum static pressure	10 bar
Minimum flow required to both inlets	8 litres per minute
Plumbing system	All, nominally equal pressures
Connections: Inlet	1/2" BSP
Connections: Outlet	Flat face union fittings
Water supplies	Rising, falling or rear entry

BAR MIXER INLET FITTINGS


There are three types of inlet fittings available for bar mixers as shown below:



Dog leg - standard on Exe and Aire.



Straight - standard on Nene and Tyne.
Available as an optional extra for Exe and Aire.
UNPIPCON

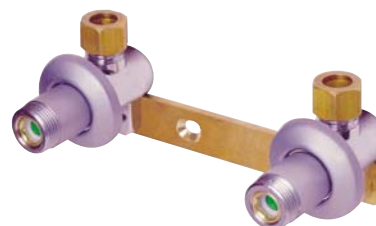

Bar Bracket - available as an optional extra for all bar mixers, or to wall mount any bath/shower mixers.
UNBMXBKT

To contact Triton's Unichrome Customer Service
Department please call **08700 678 678**

Brochure Request Line Tel: +44 (0) 24 7632 4460
Sales Order Processing Tel: +44 (0) 24 7632 4470