

## UPX Panel Heater



### Technical Details

<b>Construction</b>	Durable epoxy-polyester powder coated steel casing. Temperature resistant PBT thermoplastic moulded parts.
<b>Controls</b>	<b>All models:</b> Adjustable thermostat ON/OFF switch Heat selection switch (full/half heat) <b>Timer models (T) only:</b> Mechanical 24 hour timer programmable for 20 minute intervals with built in manual override facility; Manual/Off/Program slider selection switch
<b>Thermostat</b>	Gas filled type. Accurate to within 1.5°C. Range 5-35°C with frost protection
<b>Element</b>	Compact, finned, mineral-filled sheathed type
<b>Installation</b>	Detachable wall mounting bracket
<b>Safety</b>	Thermal cut-out. Auto rest type.
<b>IP Rating</b>	IPX4
<b>Class</b>	Class I
<b>Cable</b>	1.2 metres fitted, 3 core
<b>Colour / Finish</b>	Willow white casing and plastic parts

<b>Approvals</b>	CE, BEAB
<b>Warranty</b>	2 years
<b>Country of Origin</b>	Northern Ireland
<b>Manufacturer</b>	Glen Dimplex

### Packaging Details

Model No.	Height	Width	Depth	Barcode
UPX750	470	660	135	5018307313926
UPX1250	470	720	135	5018307313933
UPX1500	470	720	135	5018307313940
UPX2000	470	890	135	5018307313957
UPX750TI	470	660	135	5018307313964
UPX1250TI	470	720	135	5018307313971
UPX1500TI	470	720	135	5018307313988
UPX2000TI	470	890	135	5018307313995


## Product Description

Panel convector heater with thermostat control, available with or without timer

### Key Features

- Stylish design with forward facing grille for optimum heat circulation
- Aesthetics to compliment Unidare storage heater ranges
- Thermostat control provides room temperature stability to +/- 1.5°C
- Splash-proof IPX4 for use in bathrooms and wet areas
- Suitable for domestic or commercial use

### Dimensions

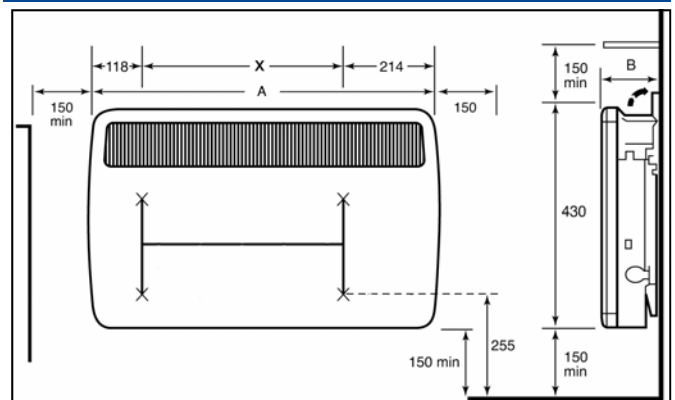

Thermostat	<b>UPX 750</b>	<b>UPX 1250</b>	<b>UPX 1500</b>	<b>UPX 2000</b>
Thermostat + 24hr timer	<b>UPX 750TI</b>	<b>UPX 1250TI</b>	<b>UPX 1500TI</b>	<b>UPX 2000TI</b>

### Performance

Output (kW)	0.75	1.25	1.5	2.0
-------------	------	------	-----	-----

### Dimensions

Height (mm)	430	430	430	430
Width (A) (mm)	620	690	690	860
Depth (B) (mm)	108	108	108	108
(X) (mm)	287	355	355	527
Weight (kg)	6.2	6.6	6.6	8.0

### Additional Information

Model No.	Ti	Hi	Pallet Quantity (2.4m high)
UPX750/TI	12	4	48
UPX1250/TI	10	4	40
UPX1500/TI	10	4	40
UPX2000/TI	9	4	36