



# Data Sheet

Product Code: YT70LZ

**Product Description:** 0-70VA Dimmable Low Voltage Lighting Transformer (with Trailing Leads)

**Product Category:** Electronic Transformer

**Barcode:** 5021575960037

**Dimensions:** 95x41.5x27.5mm

**Net Weight:** 98g

**Gross Weight:** 100g

**Fixing Centres:** N/A

**Depth from Mounting Face:**

**Recommended Back Box Depth:** N/A

**Operating Voltage:** 230v 50Hz

**Maximum Load Rating:** 70W

**Maximum Current Rating:** 230V AC: 0.32A / 11.5V AC: 6.0A

**Terminal (Live) Diameter:** N/A; **Capacity:** N/A

**Terminal (Neutral) Diameter:** N/A; **Capacity:** N/A

**Terminal (Earth) Diameter:** N/A; **Capacity:** N/A

**Intended Applications:** Indoor Use Only. Domestic lighting circuits.

**Safety Advice:** Minimum distance between transformer and lamp: 30cm. Maximum distance between transformer and lamp: 2m.


**Applicable Safety Standard:** EN 61347-1, EN 61347-2-2, EN 61547, EN 55015 & EN 61000-3-2

**Commodity Code:** 85043180

Declaration of Conformity

All information is subject to change without notice. Errors and omissions excepted. Images are for illustrative purposes only. Individual features and colours may vary. Refer to date of issue to identify latest version.

Date of Issue: 06th February 2022 © Doyle & Tratt Products Ltd, Carylls Lea, Faygate, West Sussex, RH12 4SJ, United Kingdom. All rights reserved.

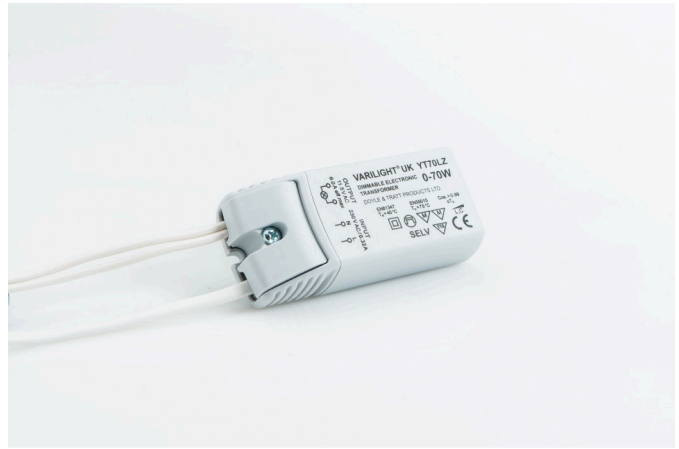

## Product Features

- ☑ Soft start gently brings lights up to full brightness when you switch on and extends lamp life
- ☑ Suitable for 12V a.c. LEDs up to a maximum of 35W
- ☑ 2 x input leads and 2 x output leads
- ☑ Auto-resetting overload protection, short circuit protection and over-temperature
- ☑ No minimum rating



MADE IN THE EU

