


## 823 CUR/P

### Plastic Consumer Unit Relocation

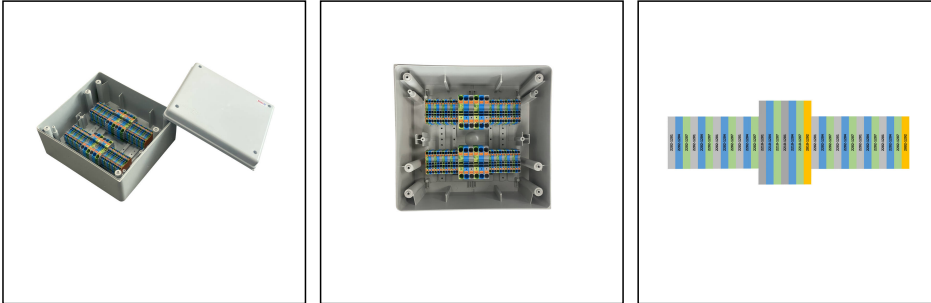

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

<b>Material</b>	Polycarbonate
<b>Protection class</b>	IP65
<b>Temp. range min</b>	-25 °C
<b>Temp. range max</b>	85 °C
<b>Glow wire test</b>	650 °C
<b>Impact resistance</b>	IK08
<b>External dimensions LxWxH</b>	270x250x160mm
<b>Type</b>	823 CUR/P
<b>UK-Number</b>	823 CUR/P
<b>Product Color</b>	RAL 7035
<b>WISKA-Order no.</b>	10112389
<b>Packing unit</b>	1

**Description:**

Suitable for relocating up to 20 ways\*

Fast self-tapping stainless screws

**Terminals\*\***

- 2202-1201 - Grey 2 conductor DIN-rail terminal with button push-in up to 4mm (x16)
- 2202-1204 - Blue 2 conductor DIN-rail terminal with button push-in up to 4mm (x16)
- 2202-1207 - Green/Yellow 2 conductor DIN-rail terminal with button push-in up to 4mm (x16)
- 2002-1292 - Orange Endplate for 2202 (x2)
- 2210-1201 - Grey 2 conductor DIN-rail terminal with button push-in up to 16mm (x4)
- 2210-1204 - Blue 2 conductor DIN-rail terminal with button push-in up to 16mm (x4)
- 2210-1207 - Green/Yellow 2 conductor DIN-rail terminal with button push-in up to 16mm (x4)
- 2010-1292 - Orange Endplate for 2210 (x2)

**Your Contact:**

**WISKA UK Ltd.**

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

**\*Each Final ring circuit need to be considered as 2 ways**

**\*\*We reserve the right to use alternative push-in terminals to the same standard should there be supply issues.**

03.07.2023

Your Contact:

**WISKA UK Ltd.**

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

 +44-12-08816062 ·  +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk