

EMT-F 25 WH

Membrane spout, flame retardant



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



Material	TPE, flame-retardant
Temp. range min	-40 °C
Temp. range max	80 °C
Glow wire test	960 °C
Protection class	IP66
Ø Connection thread D	25
Length screw-in thread L	9,5 mm
Ø cable diameter min	1 mm
Ø cable diameter max	18 mm
External diameter ED	30 mm
Total length TL	11 mm
Ø Drilling	25 mm - 26,2 mm
Wall thickness S	2 mm
Product Color	white
Order no. RAL 9001	10063010
Type	EMT-F 25 WH
Packing unit	100
EAN number	4007685630108
Tariff number	39269097
ETIM-Classification	EC000451

22.07.2025

Your Contact:


WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

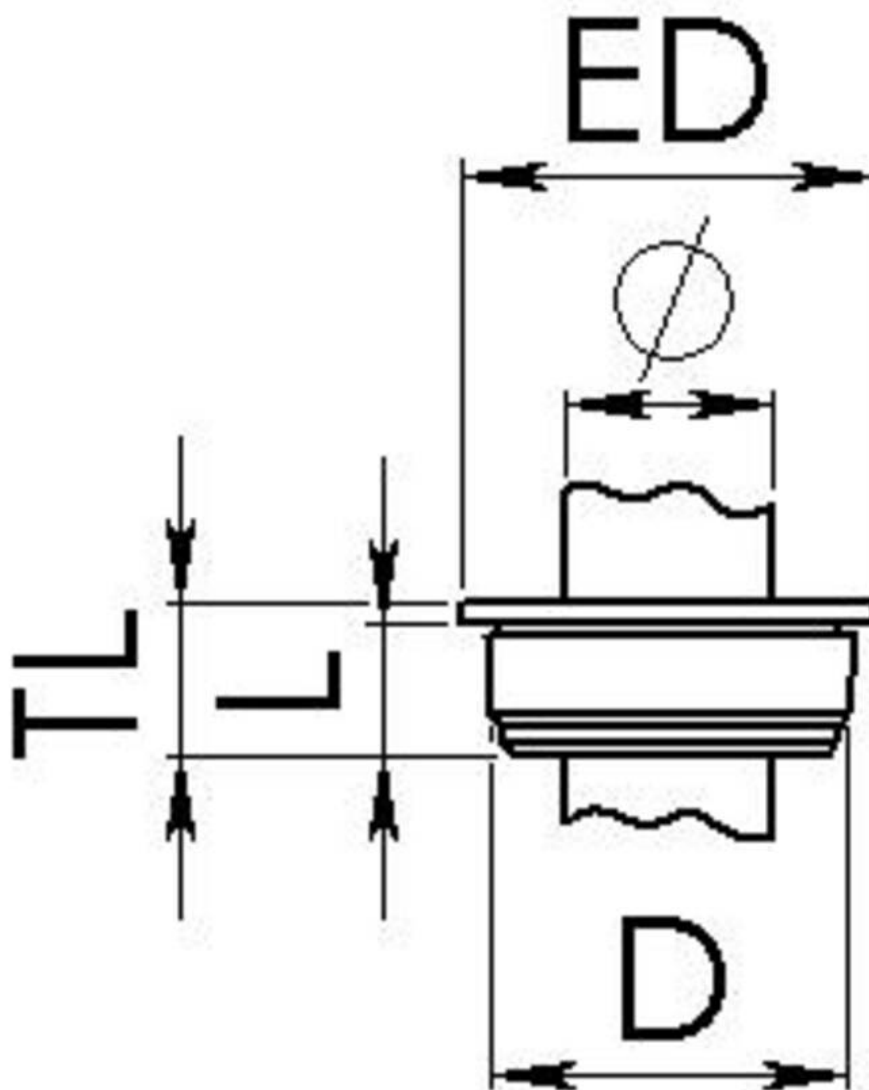

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice