

## Wireless Remote Control FX




The FX remote control enables a most convenient operation of all below listed water heaters – even if the unit is installed inside a kitchen cabinet or unreachable hidden behind panels, ceilings etc. Irrespective of location within a 10 m control range, the user can adjust temperature and memory settings from the remote towards the heater. The remote control gives the user complete operation control over the water heater, irrespective of a stone or wooden wall in between provided a strong enough signal can be transmitted.




### Description

- Wireless remote control for instantaneous water heaters models listed below
- Flexible temperature selection by up and down buttons, extended with memory buttons for two independent presentable temperature values
- LCD display
- Bi-directional signal between heater and remote unit with equal display appearance
- For optimum function, operational with one heater only
- Transmitter to be easily adopted inside the heater
- Wireless remote control, operational for below listed heaters only
- Batteries (2 × AAA Type) included with each FX unit
- Holder is provided

### Dimensions (in mm)

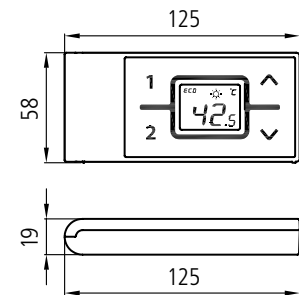

### Wall mount (in mm)

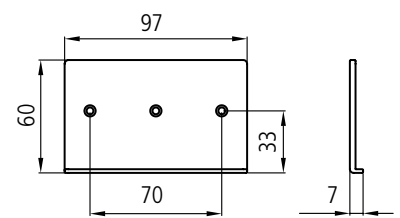


Model	FX
Operation voltage	3 V
Type of battery	2 × AAA-Alkaline batteries <sup>1)</sup>
Type of protection	IP 20 <sup>2)</sup>
Transmission range	10 m incl. barrier
Transmission power	max. 1 mW <sup>3)</sup>
Transmission and receiving frequency	868.3 MHz
Radiation	undirected
Approvals	Europa EN 300 220 / CE

1) Do not use rechargeable batteries. 2) Do not expose remote control to moisture  
 3) After keystroke the remote control emits every 10 seconds during water flow.  
 When the water flow stops the remote control emits again 3 times, i.e. again 30 seconds.

### FX is an optional accessory, suitable for following models only:

Model	FX	Power rating
CFX-U FUNKTRONIC MPS®	included	10–14,5 kW · 3~ / PE 380–415 V AC
CEX-U ELECTRONIC MPS®	optional	10–14,5 kW · 3~ / PE 380–415 V AC
CEX 9-U ELECTRONIC MPS®	optional	6.0..9.6 kW · 1~ / N / PE 220..240 V AC
CEX 9 ELECTRONIC MPS®	optional	6.0..9.6 kW · 1~ / N / PE 220..240 V AC
DEX ELECTRONIC MPS®	optional <sup>4)</sup>	18..27 kW · 3~ / PE 400 V AC
DEX 12 ELECTRONIC MPS®	optional <sup>4)</sup>	8..12.5 kW · 1~ / N / PE 220..240 V AC
DSX SERVOTRONIC MPS®	optional <sup>4)</sup>	18..27 kW · 3~ / PE 400 V AC

<sup>4)</sup> All units produced since 08/2012 and with serial numbers 512214-xxxxxx or later can be used with FX remote control

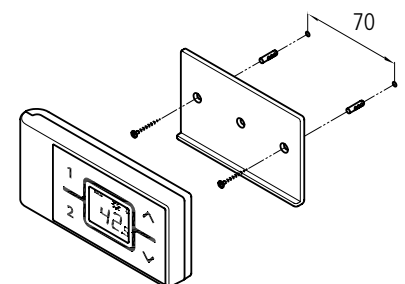

CLAGE GmbH

Pirolweg 1–5, 21337 Lueneburg, Germany  
 Fon +49(0)4131-8901-38, Fax +49(0)4131-2444771  
 E-Mail export@clage.de, Internet www.clage.com