

Zip HydroTap

Filtered chilled water

C+ Series



Energy Conservation

Programmable operation

- **Integral 24 hour 7 day timer** enables the chilled water unit to switch off automatically during known periods of inactivity e.g. overnight or weekends, but return to full functionality ahead of the next expected demand.

Features

Healthy, clean, chilled, filtered drinking water instantly

Everything but the tap is hidden under the work top

No more bottled water to buy or store

Can be installed on virtually any work top with the Tap Font (optional extra)

'Free-Flow' feature ensures filtered water continues to flow even after chilled capacity is exceeded

Capable of delivering a glass of water every 3 seconds

Zip HydroTap C+ Series

Product Selection Chart

Product Code	Power Rating kW @ 230V	Maximum Chilled Glasses/hour	Dimensions (mm) W x D x H
C125+	0.2	125	306 x 457 x 334

Standard glass 200ml.

Description

- Undersink chilled filtered drinking water system
- Option of installing on a work top or sink
- Components other than the tap in a single case with quick access to the water filter
- Undercounter safe tray with leak detector
- Continual supply of filtered water when chilled capacity is exceeded. However temperature will be less chilled until full recovery is achieved
- Lock on facility with measured water delivery for filling large vessels

Rating

0.2 kW @ 230V AC.

Chiller system

Fan-cooled condenser type.

Refrigerant

R134A.

Tap head

Chrome plated electronic tap with levers and LED indicators.

Approvals

WRAS Approved and CE Endorsed.

Warranty

1 year on site parts and labour.
For full details visit [HYPERLINK](http://www.zipheaters.co.uk/warranty)
<http://www.zipheaters.co.uk/warranty>

Location

The tap should be positioned either on a suitable sink or on a Zip Tap Font (optional).

The chiller unit should be located as closely as possible to directly beneath the tap and not more than 1 metre away.

The chiller unit must be installed with clearances of 50mm left and right and 65mm at rear.

Plumbing

The water supply must be potable (drinkable).

If static pressure exceeds 7 bar, a pressure reducing valve must be fitted.

An isolating valve should be installed between the water supply and the under-counter unit.

Electrical

To be wired to a double pole fused spur, minimum break rating of 13 amps.

Installation must comply with current IEE regulations.


Technical Support

Contact Zip on 0800 077 8302.


Maintenance

Zip HydroCare Tel: 01362 852244.

Typical Installation

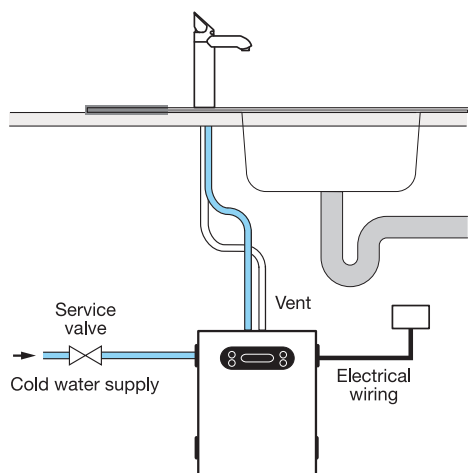

Minimum clearances (mm)



Dimensions

