

Zip Chilltap[®] Extra

Under-sink chilled and cold (ambient) filtered drinking water for the home



Far healthier

- Removes contaminants smaller than one thousandth of a millimetre.
- Designed to remove more than 99.9% of the parasites Cryptosporidium and Giardia.
- Healthier for us and our environment by eliminating plastic bottles and the greenhouse gasses associated with their production, transportation and recycling!



Instant chilled and cold (ambient) filtered drinking water both from the one tap!



Chilltap Extra on ZT004 Font Kit Assembly for mounting away from sink. A convenient and stylish addition to any kitchen.



Features

- Instant chilled and cold (ambient) filtered water (DOMCT1)
- Chilled only and cold (ambient) only options (DOMCT2 and DOMFT1)
- Chilled models provide refreshingly chilled filtered water between 7°C and 12°C always on tap for great tasting, healthier drinking
- Cold (ambient) models provide an unlimited supply of cold (ambient) filtered water always on tap for drinking and filling water jugs
- Fingertip control for filling glasses
- Hands-free filling for large jugs
- Filtered water for healthier cooking and better tasting food and drinks
- Chiller and filter system contained out of sight beneath the worktop.
- Healthy drinking water for a fraction of the cost of bottled water

Superior submicron filtration ensures crystal clear, great tasting, healthier water

- Removes impurities smaller than one thousandth of a millimeter, including Cryptosporidium and Giardia. Reduces dirt, rust, asbestos fibres and other suspended impurities
- Removes chlorine plus other tastes and odours to leave water crystal clear and odourless
- Filter change every 12 months or earlier if necessary

Zip Chilltap® Extra

Product Selection Chart

Zip Model	Product Code	Chilled Water	Cold Water	Chilled Chamber	Chilled Glasses per hour	Total Rating	Under-Sink W x D x H
Chilltap Extra	DOMCT1	✓	✓	1.8 litres	60	0.245 kW	353 x 253 x 377
Chilltap	DOMCT2	✓	-	1.8 litres	60	0.245 kW	353 x 253 x 377
Filter Tap	DOMFT1	-	✓	-	-	-	-

Technical Features

- Instant chilled and cold (ambient) filtered water at your fingertips
- Under-sink filtered water chiller with quarter turn ceramic cartridge tap
- Chrome plated brass tap head with 360 degree swivel spout
- Chilled water temperature is maintained between 7°C and 12°C
- Air cooled condenser with compressor rated at 0.245 kW
- Refrigerant type R134a
- Submicron filtration to NSF/ANSI standards 42 and 53

Installation Requirements

Location - All models

The tap should be installed to the rear of the sink where there is a minimum 52mm wide (DOMCT1) or 45mm wide (DOMCT2 and DOMFT1) flat area within the draining area of the sink.

Requires a 35mm hole (DOMCT1) or 25mm hole (DOMCT2 and DOMFT1) for tap installation.

Alternatively the DOMCT1 tap may be installed away from the sink on a ZT004 Font accessory which can be drained to waste.

The undersink chiller must be located within one metre of the tap.

The filter should be mounted where readily accessible for filter replacement on an adjacent cupboard wall.

Plumbing - All models

Should be installed by a competent person in accordance with the fitting instructions and UK Water Regulations.

Water supply must be potable (drinkable) with a minimum pressure of 0.7 bar.

An isolating valve (not supplied) should be installed between the water supply and the under-sink system.

Electrical - Chilltap Extra and Chilltap models only

Should be installed by a competent person in accordance with the fitting instructions and UK Electrical Regulations.

The chiller unit should be connected to a convenient 13A plug or fused spur.

Power supply 220V – 240V AC 50 Hz.

Clearances - Chilltap Extra and Chilltap models only

The chiller unit must be installed with a minimum clearance of 50mm left, right, rear and above.

Cupboard doors housing the unit should be offset using the 4mm buffers provided.

Filtration - All models

Supplied with external sub-micron filter to ensure crystal clear, great tasting, healthier water.

Using a submicron filter in areas with excessively high levels of sediment in the water supply may require the filter to be changed more frequently than practical. In such areas a 5 micron filter (ZT005) may be substituted after the first filter change.

Accessories - All models

- ZT004 Tap font kit
- ZT002 Submicron replacement filter
- ZT005 5 micron replacement filter

Warranty - All models

12 months on site parts and labour warranty. For full warranty details please visit: www.zipheaters.co.uk

Chilltap Extra, Chilltap and Filter Tap are specifically designed for use in domestic environments. Use of the product in commercial applications may invalidate the warranty.


Technical Support

Contact Zip Heaters (UK) Ltd
14 Bertie Ward Way,
Dereham, Norfolk,
NR19 1TE
Tel 0800 077 8302
Website www.zipheaters.co.uk

Service

Zip HydroCare Tel: 01362 852244

Chilltap Extra

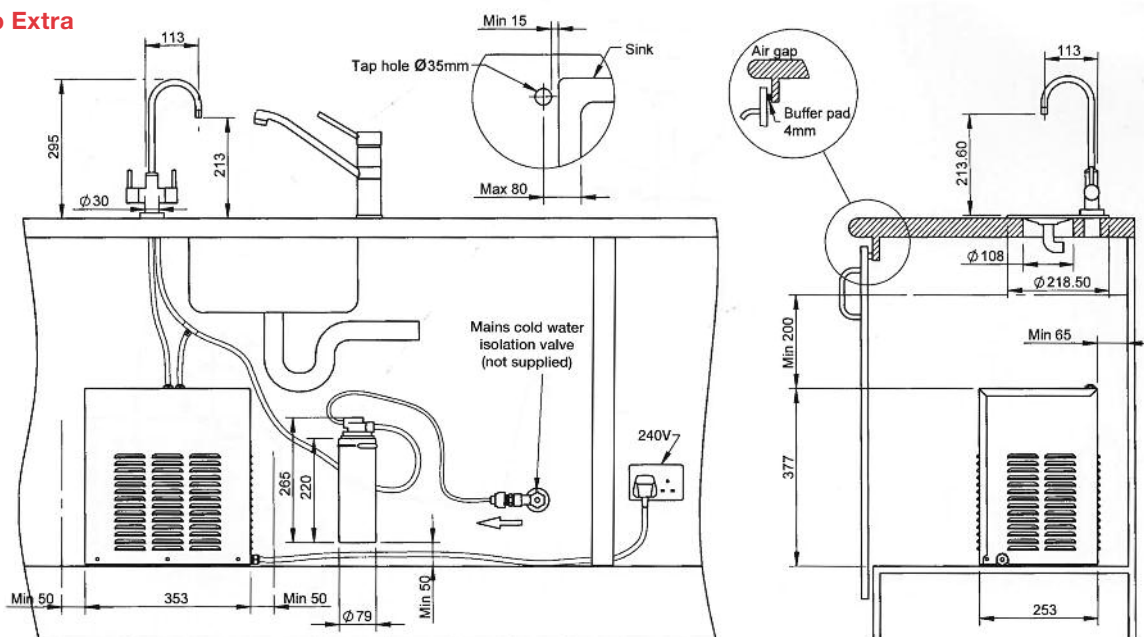

As Zip policy is one of continuous product improvement changes to specifications may be made without prior notice.

The terms, Zip and Chilltap are trademarks
Data Sheet ZSSCTE1 | Updated UK July 2012