

*Section 7*  
*Programming Tables*

# 7 Programming Tables

[000] Date and Time Setting							
	Year (00 – 99)	Month (Jan. – Dec.)	Day (1 – 31)	Day of the week (Sun – Sat)	Hour (1 – 12)	Minute (00 – 59)	AM / PM
Default	'98	Jan.	1	Thu	12	00	AM
Change							

[002] System Password				
Default				Parameter: 4 digits, 0 – 9
1	2	3	4	

	[003] DSS Console Port Assignment	[004] Paired Telephone Assignment for DSS Console
Selection	DSS console port no. (02...16) / Disable	Paired telephone port no. (01...16) / Disable
Default	All: Disable	DSS 1 – Disable / DSS 2 – Disable
DSS 1		
DSS 2		

[005] One-Touch Transfer Using a DSS Button		
	Default	Selection
With Transfer	✓	
Without Transfer		

[006] Time (Day/Night/Lunch) Service Changing Mode		
	Default	Selection
Manually	✓	
Automatically		

[007] Time (Day/Night/Lunch) Service Start Time									
	Default	Change							
	Every day	Every day	Sun.	Mon.	Tue.	Wed.	Thu.	Fri.	Sat.
Day	9:00 AM								
Night	5:30 PM								
Lunch-S	None								
Lunch-E	None								

[008] Operator Assignment		
	Default	Port no.
Operator	Jack-01	

[010] LCD Time Display Selection		
	Default	Selection
12 HOUR	✓	
24 HOUR		

SPD no.	[001] System Speed Dialling Entry	[011] System Speed Dialling Name Setting
	Telephone number (32 digits max.)	Name (16 characters max.)
Default	All: Not stored	
00		
01		
02		
03		
04		
05		
06		
07		
08		
09		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		

(Continued)

7

*Programming Tables*

SPD no.	[001] System Speed Dialling Entry	[011] System Speed Dialling Name Setting
	Telephone number (32 digits max.)	Name (16 characters max.)
Default	All: Not stored	
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		

(Continued)

# 7

## Programming Tables

SPD no.	[001] System Speed Dialling Entry	[011] System Speed Dialling Name Setting
	Telephone number (32 digits max.)	Name (16 characters max.)
Default	All: Not stored	
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		

[009] Extension Number Assignment						
Selection	Plan 1		Plan 2		Plan 3	
Default	✓					
Change						
Extension jack no.	Extension no. (200...299)		Extension no. (100...499)		Extension no. (10...49)	
	Default	Change	Default	Change	Default	Change
01	201		201		21	
02	202		202		22	
03	203		203		23	
04	204		204		24	
05	205		205		25	
06	206		206		26	
07	207		207		27	
08	208		208		28	
09	209		209		29	
10	210		210		30	
11	211		211		31	
12	212		212		32	
13	213		213		33	
14	214		214		34	
15	215		215		35	
16	216		216		36	
17	217		217		37	
18	218		218		38	
19	219		219		39	
20	220		220		40	
21	221		221		41	
22	222		222		42	
23	223		223		43	
24	224		224		44	

[012] Alternative Feature Numbering Plan			
CODE no.	Feature no. (10 digits max.)	CODE no.	Feature no. (10 digits max.)
Default: All	Not stored		
50		55	
51		56	
52		57	
53		58	
54		59	

# 7 Programming Tables

[100] Hunting Group Set										
Selection	Default	Extension group no. (1...8, * : all)								
	All	1	2	3	4	5	6	7	8	*
Disable	✓									
Enable										

[101] Hunting Type										
Selection	Default	Extension group no. (1...8, * : all)								
	All	1	2	3	4	5	6	7	8	*
Terminate	✓									
Circular										

Selection	[102] Voice Mail Port for KX-TVP100						[107] DTMF Receiver Check						
	Default	Extn. port no. (07, 08, 15, 16, * : all)					Default	DTMF receiver no. (1...6)					
	All	07	08	15	16	*	All	1	2	3	4	5	6
Disable	✓												
Enable							✓						

Selection	[103] DTMF Integration for KX-TVP100		[104] Hold Mode Selection			[105] Conference Tone		[106] External Paging Access Tone	
	Enable	Disable	Hold-1	Hold-2	Hold-3	Enable	Disable	Enable	Disable
Default		✓	✓			✓		✓	
Change									

Selection	[108] Recall Mode for a Locked Extension		[109] CO Indicator Assignment		[110] Recall Key Mode	
	Enable	Disable	Enable	Disable	MODE 1	MODE 2
Default		✓	✓		✓	
Change						

Selection	[111] Hold Music Selection		[112] DSS Console Indication Mode	
	External	Tone	Enable	Disable
Default	✓		✓	
Change				

	[115] Extension Ringing Pattern Selection			[116] Conference Pattern Selection			
	Single	Double	Triple	3-Party C-0 E-3	3-Party C-1 E-3	3-Party C-2 E-3	5-Party C-2 E-5
Selection							
Default	✓						✓
Change							

	[117] Call Pickup Tone		[118] Pulse Restriction		[119] Redialling after Pulse to Tone Conversion		[120] Bell Frequency	
	Enable	Disable	Enable	Disable	Enable	Disable	20 Hz	25 Hz
Selection								
Default	✓		✓			✓		✓
Change								

	[121] Automatic Exchange Line Access Number Selection		[122] Automatic Rotation for Exchange Line Access	
	Dial 0	Dial 9	Enable	Disable
Selection				
Default		✓		✓
Change				

	[123] Break Ratio		[124] SLT Ringing Mode Selection		[125] Call Barring Check for * and #		[126] DSS Off-Hook Mode	
	MODE 1	MODE 2	MODE 1	MODE 2	Enable	Disable	Enable	Disable
Selection								
Default	✓			✓	✓		✓	
Change								

[127] Pickup Group Set										
Selection	Default	Extension group no. (1...8, * : all)								
	All	1	2	3	4	5	6	7	8	*
Disable	✓									
Enable										

[200] Hold Recall Time										
Selection	30 sec	1 min	1.5 min	2 min	3 min	4 min	5 min	6 min	Disable	
Default	✓									
Change										

	[201] Transfer Recall Time				[202] Call Forwarding Start Time				[203] Pickup Dial Delay Time			
	15 sec	30 sec	1 min	2 min	5 sec	10 sec	15 sec	20 sec	1 sec	2 sec	3 sec	4 sec
Selection												
Default		✓					✓				✓	
Change												



# 7 *Programming Tables*

[204] Call Duration Count Start Time											
Selection	5 sec	10 sec	15 sec	20 sec	25 sec	30 sec	35 sec	40 sec	45 sec	50 sec	Instantly
Default		✓									
Change											

[206] Dialling Start Time							
Selection	0 ms	250 ms	500 ms	750 ms	1000 ms	1250 ms	1500 ms
Default	✓						
Change							

	[207] Recall Timing Range Selection					[208] Interdigit Time			
	MODE 1	MODE 2	MODE 3	MODE 4	MODE 5	5 sec	10 sec	15 sec	20 sec
Selection									
Default	✓								✓
Change									

	[210] DTMF Time		[211] No Dial Disconnection		[212] Exchange Line Duration Time Limit	[213] Bell Off Detection		
	MODE 1	MODE 2	Enable	Disable	1...32 minutes	3 sec	6 sec	12 sec
Selection								
Default	✓		✓		10 minutes	✓		
Change								

[300] Carrier Excepted Code Assignment			
CODE no.	Carrier code (10 digits max.)	CODE no.	Carrier code (10 digits max.)
Default: All			Not stored
01		11	
02		12	
03		13	
04		14	
05		15	
06		16	
07		17	
08		18	
09		19	
10		20	

[301] Call Barring — System Speed Dialling Boundary Class					
Selection	Class-1	Class-2	Class-3	Class-4	Class-5
Default	✓				
Change					

	[302] Call Barring – Class 2 Denied Codes	[303] Call Barring – Class 3 Denied Codes	[304] Call Barring – Class 4 Denied Codes	[305] Call Barring – Class 5 Denied Codes
CODE no.	Telephone no. (11 digits)			
Default	All: Not stored			
01				
02				
03				
04				
05				
06				
07				
08				
09				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

<b>[306] Call Barring – Exception Codes</b>			
Code no.	Telephone no. (11 digits)	Code no.	Telephone no. (11 digits)
Default	All: Not stored		
01		41	
02		42	
03		43	
04		44	
05		45	
06		46	
07		47	
08		48	
09		49	
10		50	
11		51	
12		52	
13		53	
14		54	
15		55	
16		56	
17		57	
18		58	
19		59	
20		60	
21		61	
22		62	
23		63	
24		64	
25		65	
26		66	
27		67	
28		68	
29		69	
30		70	
31		71	
32		72	
33		73	
34		74	
35		75	
36		76	
37		77	
38		78	
39		79	
40		80	

# 7 *Programming Tables*

---

[309] Emergency Dial Number Set	
CODE no.	Emergency no. (11 digits max.)
Default	Code-01 = 999, Code-02 = 112, Other codes = Not stored
1	
2	
3	
4	
5	

[310] Account Codes			
CODE no.	Account code (4 digits)	CODE no.	Account code (4 digits)
Default	All: Not stored		
01		13	
02		14	
03		15	
04		16	
05		17	
06		18	
07		19	
08		20	
09		21	
10		22	
11		23	
12		24	

# 7 *Programming Tables*

<b>[311] Automatic Pause Insertion Codes</b>			
CODE no.	Pause code (7 digits max.)	CODE no.	Pause code (7 digits max.)
Default	All: Not stored		
01		21	
02		22	
03		23	
04		24	
05		25	
06		26	
07		27	
08		28	
09		29	
10		30	
11		31	
12		32	
13		33	
14		34	
15		35	
16		36	
17		37	
18		38	
19		39	
20		40	

<b>[312] Call Barring – Extension Lock Boundary Class</b>		
	Default	Change
Disable	✓	
COS-2		
COS-3		
COS-4		
COS-5		

<b>[350] ARS Selection</b>								
Selection	Default	Exchange line no. (1…6* : All)						
	All	1	2	3	4	5	6	*
Enable								
Disable	✓							

<b>[351] Route 1 Selection Codes (Leading Digits)</b>			
Code no.	Area code no. (7 digits max.)	Code no.	Area code no. (7 digits max.)
Default	All: Not stored		
01		41	
02		42	
03		43	
04		44	
05		45	
06		46	
07		47	
08		48	
09		49	
10		50	
11		51	
12		52	
13		53	
14		54	
15		55	
16		56	
17		57	
18		58	
19		59	
20		60	
21		61	
22		62	
23		63	
24		64	
25		65	
26		66	
27		67	
28		68	
29		69	
30		70	
31		71	
32		72	
33		73	
34		74	
35		75	
36		76	
37		77	
38		78	
39		79	
40		80	

<b>[352] Route 2 Selection Codes (Leading Digits)</b>			
Code no.	Area code no. (7 digits max.)	Code no.	Area code no. (7 digits max.)
Default	All: Not stored		
01		41	
02		42	
03		43	
04		44	
05		45	
06		46	
07		47	
08		48	
09		49	
10		50	
11		51	
12		52	
13		53	
14		54	
15		55	
16		56	
17		57	
18		58	
19		59	
20		60	
21		61	
22		62	
23		63	
24		64	
25		65	
26		66	
27		67	
28		68	
29		69	
30		70	
31		71	
32		72	
33		73	
34		74	
35		75	
36		76	
37		77	
38		78	
39		79	
40		80	

<b>[353] Route 3 Selection Codes (Leading Digits)</b>			
Code no.	Area code no. (7 digits max.)	Code no.	Area code no. (7 digits max.)
Default	All: Not stored		
01		41	
02		42	
03		43	
04		44	
05		45	
06		46	
07		47	
08		48	
09		49	
10		50	
11		51	
12		52	
13		53	
14		54	
15		55	
16		56	
17		57	
18		58	
19		59	
20		60	
21		61	
22		62	
23		63	
24		64	
25		65	
26		66	
27		67	
28		68	
29		69	
30		70	
31		71	
32		72	
33		73	
34		74	
35		75	
36		76	
37		77	
38		78	
39		79	
40		80	



<b>[354] Route 4 Selection Codes (Leading Digits)</b>			
Code no.	Area code no. (7 digits max.)	Code no.	Area code no. (7 digits max.)
Default	All: Not stored		
01		41	
02		42	
03		43	
04		44	
05		45	
06		46	
07		47	
08		48	
09		49	
10		50	
11		51	
12		52	
13		53	
14		54	
15		55	
16		56	
17		57	
18		58	
19		59	
20		60	
21		61	
22		62	
23		63	
24		64	
25		65	
26		66	
27		67	
28		68	
29		69	
30		70	
31		71	
32		72	
33		73	
34		74	
35		75	
36		76	
37		77	
38		78	
39		79	
40		80	

<b>[355] Route 1 Exception Codes</b>			
Code no.	Area code no. (7 digits max.)	Code no.	Area code no. (7 digits max.)
Default	All: Not stored		
01		41	
02		42	
03		43	
04		44	
05		45	
06		46	
07		47	
08		48	
09		49	
10		50	
11		51	
12		52	
13		53	
14		54	
15		55	
16		56	
17		57	
18		58	
19		59	
20		60	
21		61	
22		62	
23		63	
24		64	
25		65	
26		66	
27		67	
28		68	
29		69	
30		70	
31		71	
32		72	
33		73	
34		74	
35		75	
36		76	
37		77	
38		78	
39		79	
40		80	

<b>[356] Route 2 Exception Codes</b>			
Code no.	Area code no. (7 digits max.)	Code no.	Area code no. (7 digits max.)
Default	All: Not stored		
01		41	
02		42	
03		43	
04		44	
05		45	
06		46	
07		47	
08		48	
09		49	
10		50	
11		51	
12		52	
13		53	
14		54	
15		55	
16		56	
17		57	
18		58	
19		59	
20		60	
21		61	
22		62	
23		63	
24		64	
25		65	
26		66	
27		67	
28		68	
29		69	
30		70	
31		71	
32		72	
33		73	
34		74	
35		75	
36		76	
37		77	
38		78	
39		79	
40		80	

<b>[357] Route 3 Exception Codes</b>			
Code no.	Area code no. (7 digits max.)	Code no.	Area code no. (7 digits max.)
Default	All: Not stored		
01		41	
02		42	
03		43	
04		44	
05		45	
06		46	
07		47	
08		48	
09		49	
10		50	
11		51	
12		52	
13		53	
14		54	
15		55	
16		56	
17		57	
18		58	
19		59	
20		60	
21		61	
22		62	
23		63	
24		64	
25		65	
26		66	
27		67	
28		68	
29		69	
30		70	
31		71	
32		72	
33		73	
34		74	
35		75	
36		76	
37		77	
38		78	
39		79	
40		80	

<b>[358] Route 4 Exception Codes</b>			
Code no.	Area code no. (7 digits max.)	Code no.	Area code no. (7 digits max.)
Default	All: Not stored		
01		41	
02		42	
03		43	
04		44	
05		45	
06		46	
07		47	
08		48	
09		49	
10		50	
11		51	
12		52	
13		53	
14		54	
15		55	
16		56	
17		57	
18		58	
19		59	
20		60	
21		61	
22		62	
23		63	
24		64	
25		65	
26		66	
27		67	
28		68	
29		69	
30		70	
31		71	
32		72	
33		73	
34		74	
35		75	
36		76	
37		77	
38		78	
39		79	
40		80	

# 7 Programming Tables

[359] 1st Carrier Selection Code (BT Line Access Code)	
Selection	1st carrier access code (4 digits max.)
Default	121 (British Telecom Line access code)
Change	

	[360] ARS Modification – Removed Digits	[361] ARS Modification – Added Number	[364] ARS Trunk Group						
	Route no.	Deleted digits (0...9)	Added no. : 20 digits max. (0...9, *, #)	Trunk (TRK) group no. (1...6, *)					
			1	2	3	4	5	6	*
Default	All routes – 0	Route 1 = 131, Other routes = Not stored	All routes – *						
1									
2									
3									
4									

	[362] ARS Dial Tone Pattern Selection				[363] ARS Interdigit Time
	Selection	Disable	Tone 1	Tone 2	Tone 3
Default		✓			5 seconds
Change					

	[381] Route 1 Authorisation Code	[382] Route 2 Authorisation Code	[383] Route 3 Authorisation Code	[384] Route 4 Authorisation Code
	Exchange line no.	Authorisation code : 19 digits max. (0...9)		
Default	All: Not stored			
1				
2				
3				
4				
5				
6				
*				

# 7 Programming Tables

Exchange line no.	[385] Route 1 Itemised Bill		[386] Route 2 Itemised Bill		[387] Route 3 Itemised Bill		[388] Route 4 Itemised Bill	
	Selection		Selection		Selection		Selection	
	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable
Default: All		✓		✓		✓		✓
1								
2								
3								
4								
5								
6								
*								

[389] Itemised Bill Code Assignment			
Extension port no.	Itemised bill code : 3 digits max. (0...9)	Extension port no.	Itemised bill code : 3 digits max. (0...9)
Default	Extension ports 01 through 24 = 201 through 224		
01		14	
02		15	
03		16	
04		17	
05		18	
06		19	
07		20	
08		21	
09		22	
10		23	
11		24	
12		*	
13			

Exchange line no.	[400] Exchange Line Connection Assignment		[401] Dial Mode			[402] Pulse Speed Selection	
	Selection		Selection			Selection	
	Connect	No Connect	DTMF	Pulse	Call Blocking	Low Speed	High Speed
Default: All	✓		✓			✓	
1							
2							
3							
4							
5							
6							
*							

# 7 Programming Tables

	[403] Host PBX Access Codes	[404] Trunk Group Assignment	
Exchange line no.	Access codes (1 or 2 digits, 8 different codes max.)	Trunk group no. (1...6)	
Default	All: Not stored	Default	Change
1		1	
2		2	
3		3	
4		4	
5		5	
6		6	
*		—	

[405] Flexible Outward Dialling Assignment — Day															
Extension port no.	Exchange line 1		Exchange line 2		Exchange line 3		Exchange line 4		Exchange line 5		Exchange line 6		* (All)		
	Selection														
	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	
Default: All	✓		✓		✓		✓		✓		✓		✓		
01															
02															
03															
04															
05															
06															
07															
08															
09															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
*															



<b>[406] Flexible Outward Dialling Assignment — Night</b>															
Extension port no.	Exchange line 1		Exchange line 2		Exchange line 3		Exchange line 4		Exchange line 5		Exchange line 6		* (All)		
	Selection														
	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	
Default: All	✓		✓		✓		✓		✓		✓		✓		
01															
02															
03															
04															
05															
06															
07															
08															
09															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
*															

[407] Flexible Outward Dialling Assignment — Lunch															
Extension port no.	Exchange line 1		Exchange line 2		Exchange line 3		Exchange line 4		Exchange line 5		Exchange line 6		* (All)		
	Selection														
	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	
Default: All	✓		✓		✓		✓		✓		✓		✓		
01															
02															
03															
04															
05															
06															
07															
08															
09															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
*															

# 7

# Programming Tables

[408] Flexible Ringing Assignment — Day															
Extension port no.	Exchange line 1		Exchange line 2		Exchange line 3		Exchange line 4		Exchange line 5		Exchange line 6		* (All)		
	Selection														
	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	
Default: All	✓		✓		✓		✓		✓		✓		✓		
01															
02															
03															
04															
05															
06															
07															
08															
09															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
*															

[409] Flexible Ringing Assignment — Night															
Extension port no.	Exchange line 1		Exchange line 2		Exchange line 3		Exchange line 4		Exchange line 5		Exchange line 6		* (All)		
	Selection														
	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	
Default: All	✓		✓		✓		✓		✓		✓		✓		
01															
02															
03															
04															
05															
06															
07															
08															
09															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
*															

[410] Flexible Ringing Assignment — Lunch															
Extension port no.	Exchange line 1		Exchange line 2		Exchange line 3		Exchange line 4		Exchange line 5		Exchange line 6		* (All)		
	Selection														
	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	
Default: All	✓		✓		✓		✓		✓		✓		✓		
01															
02															
03															
04															
05															
06															
07															
08															
09															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
*															

[411] Delayed Ringing Assignment — Day																												
Extension port no.	Exchange line 1			Exchange line 2			Exchange line 3			Exchange line 4			Exchange line 5			Exchange line 6			* (All)									
	Selection (I: Immediately, 10: 10 seconds delay, 20: 20 seconds delay, 30: 30 seconds delay)																											
	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30				
Default: All	✓				✓				✓				✓				✓				✓				✓			
01																												
02																												
03																												
04																												
05																												
06																												
07																												
08																												
09																												
10																												
11																												
12																												
13																												
14																												
15																												
16																												
17																												
18																												
19																												
20																												
21																												
22																												
23																												
24																												
*																												

[412] Delayed Ringing Assignment — Night																																
Extension port no.	Exchange line 1				Exchange line 2				Exchange line 3				Exchange line 4				Exchange line 5				Exchange line 6				* (All)							
	Selection (I: Immediately, 10: 10 seconds delay, 20: 20 seconds delay, 30: 30 seconds delay)																															
	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30
Default: All	✓				✓				✓				✓				✓				✓				✓				✓			
01																																
02																																
03																																
04																																
05																																
06																																
07																																
08																																
09																																
10																																
11																																
12																																
13																																
14																																
15																																
16																																
17																																
18																																
19																																
20																																
21																																
22																																
23																																
24																																
*																																

[413] Delayed Ringing Assignment — Lunch																												
Extension port no.	Exchange line 1			Exchange line 2			Exchange line 3			Exchange line 4			Exchange line 5			Exchange line 6			* (All)									
	Selection (I: Immediately, 10: 10 seconds delay, 20: 20 seconds delay, 30: 30 seconds delay)																											
	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30	I	10	20	30				
Default: All	✓				✓				✓				✓				✓				✓				✓			
01																												
02																												
03																												
04																												
05																												
06																												
07																												
08																												
09																												
10																												
11																												
12																												
13																												
14																												
15																												
16																												
17																												
18																												
19																												
20																												
21																												
22																												
23																												
24																												
*																												



# 7 Programming Tables

Exchange line no.	[414] Exchange Line Mode — Day						[415] Exchange Line Mode — Night						[416] Exchange Line Mode — Lunch					
	N	DIL	Extn. no.	D1	D2	U	N	DIL	Extn. no.	D1	D2	U	N	DIL	Extn. no.	D1	D2	U
Default: All	✓						✓						✓					
1																		
2																		
3																		
4																		
5																		
6																		
*																		

Exchange line no.	[417] Pause Time				[418] Recall Time							
	Selection (seconds)				Selection (milliseconds)							
	1.5	2.5	3.5	4.5	80	100	160	300	600	900	1200	
Default: All	✓					✓						
1												
2												
3												
4												
5												
6												
*												

Exchange line no.	[419] Automatic Designated Exchange Line Access		[420] Calling Party Control (CPC) Signal		[421] CPC Detection for Outgoing Calls	
	Selection		Selection: 00 (Disable), 00 (22 msec)···75 (614 msec)		Selection	
	Enable	Disable			Enable	Disable
Default: All	✓		00 (Disable)			✓
1						
2						
3						
4						
5						
6						
*						

# 7 *Programming Tables*

	[422] Disconnect Time			[423] Exchange Line Ringing Pattern Selection			[424] Reverse (Polarity) Circuit Assignment	
	Selection (seconds)			Selection			Selection	
Exchange line no.	0.5	2.0	4.0	Single	Double	Triple	Enable	Disable
Default: All		✓			✓			✓
1								
2								
3								
4								
5								
6								
*								

[500] DISA Incoming Dialling Mode Selection		
Selection	Without AA	With AA
Default	✓	
Change		

[501] DISA Built-in Auto Attendant		
Auto attendant no.	Selection	
	Jack: Extension port no. (01...24)	GRP: Extension group no. (1...8)
Default	All: Not stored	
0		
1		
2		
3		
4		
5		
6		
7		
8		
9		

# 7 Programming Tables

	[502] OGM Mode Selection						[503] FAX Connection	
Selection	MODE 1	MODE 2	MODE 3	MODE 4	MODE 5	MODE 6	Extension port no. (01...24) / Disable	
Default	✓						Disable (Not assigned)	
Change								

	[504] DISA Delayed Answer Time				[505] DISA Waiting Time after OGM			
Selection	0 sec	3 sec	6 sec	12 sec	0 sec	5 sec	10 sec	15 sec
Default		✓				✓		
Change								

	[506] DISA Busy Mode			[507] DISA Intercept Mode		[508] DISA Ringing Time before Intercept					
Selection	Disconnect	Call Waiting	DISA 2	Intercept	Disconnect	10 sec	20 sec	30 sec	40 sec	60 sec	120 sec
Default	✓			✓			✓				
Change											

	[509] DISA Ringing Time after Intercept						[510] DISA No Dial Mode			
Selection	10 sec	20 sec	30 sec	40 sec	60 sec	120 sec	DISA 1		DISA 2	
							Intercept	Disconnect	Intercept	Disconnect
Default		✓					✓		✓	
Change										

	[513] Cyclic Tone Detection			
Selection	Disable	2 Times	3 Times	4 Times
Default				✓
Change				

	[514] FAX Tone Detection		[515] Intercept Time for Internal DISA			[517] DISA AA Wait Time				
Selection	1 Time	2 Times	3 sec	6 sec	9 sec	1 sec	2 sec	3 sec	4 sec	5 sec
Default	✓		✓				✓			
Change										

# 7 Programming Tables

[516] DISA Incoming Assignment					
Extension port no.	Selection		Extension port no.	Selection	
	Enable	Disable		Enable	Disable
Default: All	✓		13		
01			14		
02			15		
03			16		
04			17		
05			18		
06			19		
07			20		
08			21		
09			22		
10			23		
11			24		
12			*		

	[519] DISA OGM Mute Time				[520] UCD Group
	0 sec	2 sec	4 sec	6 sec	Extension group no. (1...8)
Selection					
Default	✓				1
Change					

	[521] UCD Busy Waiting Time	[522] UCD OGM Message Interval Time				[523] UCD Busy Mode	
	1...32 minutes, 1...59 seconds	30 sec	1 min	1.5 min	2 min	Intercept	Disconnect
Selection							
Default	10 minutes		✓			✓	
Change							

	[524] UCD Intercept Mode		[525] UCD Ringing Time before Intercept					
	Intercept	Disconnect	10 sec	20 sec	30 sec	40 sec	60 sec	120 sec
Selection								
Default	✓			✓				
Change								

[526] UCD Ringing Time after Intercept						
Selection	10 sec	20 sec	30 sec	40 sec	60 sec	120 sec
Default		✓				
Change						

Extension port no.	[600] Extension Group Assignment								[604] Extension Name Setting
	Extension group no. (1···8)								Extension name (10 character max.)
	Default: All – Group 1								Default: All – Not stored
	1	2	3	4	5	6	7	8	
01									
02									
03									
04									
05									
06									
07									
08									
09									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									
21									
22									
23									
24									
*									

Extension port no.	[601] Call Barring – Class of Service Assignment — Day					[602] Call Barring – Class of Service Assignment — Night					[603] Call Barring – Class of Service Assignment — Lunch				
	COS no. (1...5)					COS no. (1...5)					COS no. (1...5)				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
Default: All	✓					✓					✓				
01															
02															
03															
04															
05															
06															
07															
08															
09															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
*															

Extension port no.	[605] Account Code Entry Mode				[606] Call Transfer to an Exchange Line		[607] Call Forwarding to an Exchange Line	
	Selection				Selection		Selection	
	Option	Forced	Verify-All	Verify-Toll (Call Barring)	Enable	Disable	Enable	Disable
Default: All	✓					✓		✓
01								
02								
03								
04								
05								
06								
07								
08								
09								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
21								
22								
23								
24								
*								

Extension port no.	[608] Executive Busy Override		[609] Do Not Disturb Override		[610] Paralleled Telephone Connection		[611] TAM Extension	
	Selection		Selection		Selection		Selection	
	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable
Default: All		✓		✓		✓		✓
01								
02								
03								
04								
05								
06								
07								
08								
09								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
21								
22								
23								
24								
*								



Extension port no.	[612] Room Monitor Assignment		[613] Exchange Line Duration Time Limit Selection		[614] Internal Pulse Detection	
	Selection		Selection		Selection	
	Enable	Disable	Enable	Disable	Enable	Disable
Default: All		✓		✓	✓	
01						
02						
03						
04						
05						
06						
07						
08						
09						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						
21						
22						
23						
24						
*						

	[615] LCD Language Assignment						
	Selection				Selection		
	English	Spanish	Portuguese		English	Spanish	Portuguese
Default: All	✓			09			
01				10			
02				11			
03				12			
04				13			
05				14			
06				15			
07				16			
08				*			

	[700] Doorphone Ringing Assignment — Day				[701] Doorphone Ringing Assignment — Night				[702] Doorphone Ringing Assignment — Lunch							
Extension port no.	1...4: Doorphone no., E: Enable / D: Disable															
	1		2		3		4		1		2		3		4	
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default: All	✓		✓		✓		✓		✓		✓		✓		✓	
01																
02																
03																
04																
05																
06																
07																
08																
09																
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
*																

Extension port no.	[703] Door Opener Assignment — Day				[704] Door Opener Assignment — Night				[705] Door Opener Assignment — Lunch							
	1...4: Door opener no., E: Enable / D: Disable															
	1	2	3	4	1	2	3	4	1	2	3	4				
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default: All		✓		✓		✓		✓		✓		✓		✓		✓
01																
02																
03																
04																
05																
06																
07																
08																
09																
10																
11																
12																
13																
14																
15																
16																
17																
18																
19																
20																
21																
22																
23																
24																
✳																

Doorphone no.	[706] Doorphone Ringing / Tone Pattern Selection				[707] Doorphone Access Tone Selection		[708] Doorphone Ringing Time	
	Selection				Selection		Selection	
	Single	Double	Triple	S-Double	Enable	Disable	15 sec	30 sec
Default: All			✓		✓		✓	
1								
2								
3								
4								
✳								

# 7 Programming Tables

[709] Door Opener Time								
Door opener no.	Selection							
	1 sec	2 sec	3 sec	4 sec	5 sec	6 sec	7 sec	8 sec
Default: All					✓			
1								
2								
3								
4								
*								


[800] SMDR RS-232C Communication Parameters																		
Selection	New line code		Baud rate							Word length		Parity					Stop bit	
	CR+LF	CR	150	300	600	1200	2400	4800	9600	7	8	Mark	Space	Even	Odd	None	1	2
Default	✓								✓	✓	✓						✓	
Change																		

[801] SMDR Parameter		
	Default	Selection
Page length (4...99)	66	
Skip perforation (0...95)	0	

[802] Incoming/Outgoing Call Selection for Printing		
	Default	Selection
Incoming calls	On	✓
	Off	
Outgoing calls	On	✓
	Off	
	Toll	

	[803] Secret Speed Dialling / One-Touch Dialling Printing		[805] SMDR Account Code Selection	
	No Printing	Printing	CODE	INDEX
Default	✓		✓	
Change				

	[806] SMDR Language Assignment		
	English	Spanish	Portuguese
Default	✓		
Change			

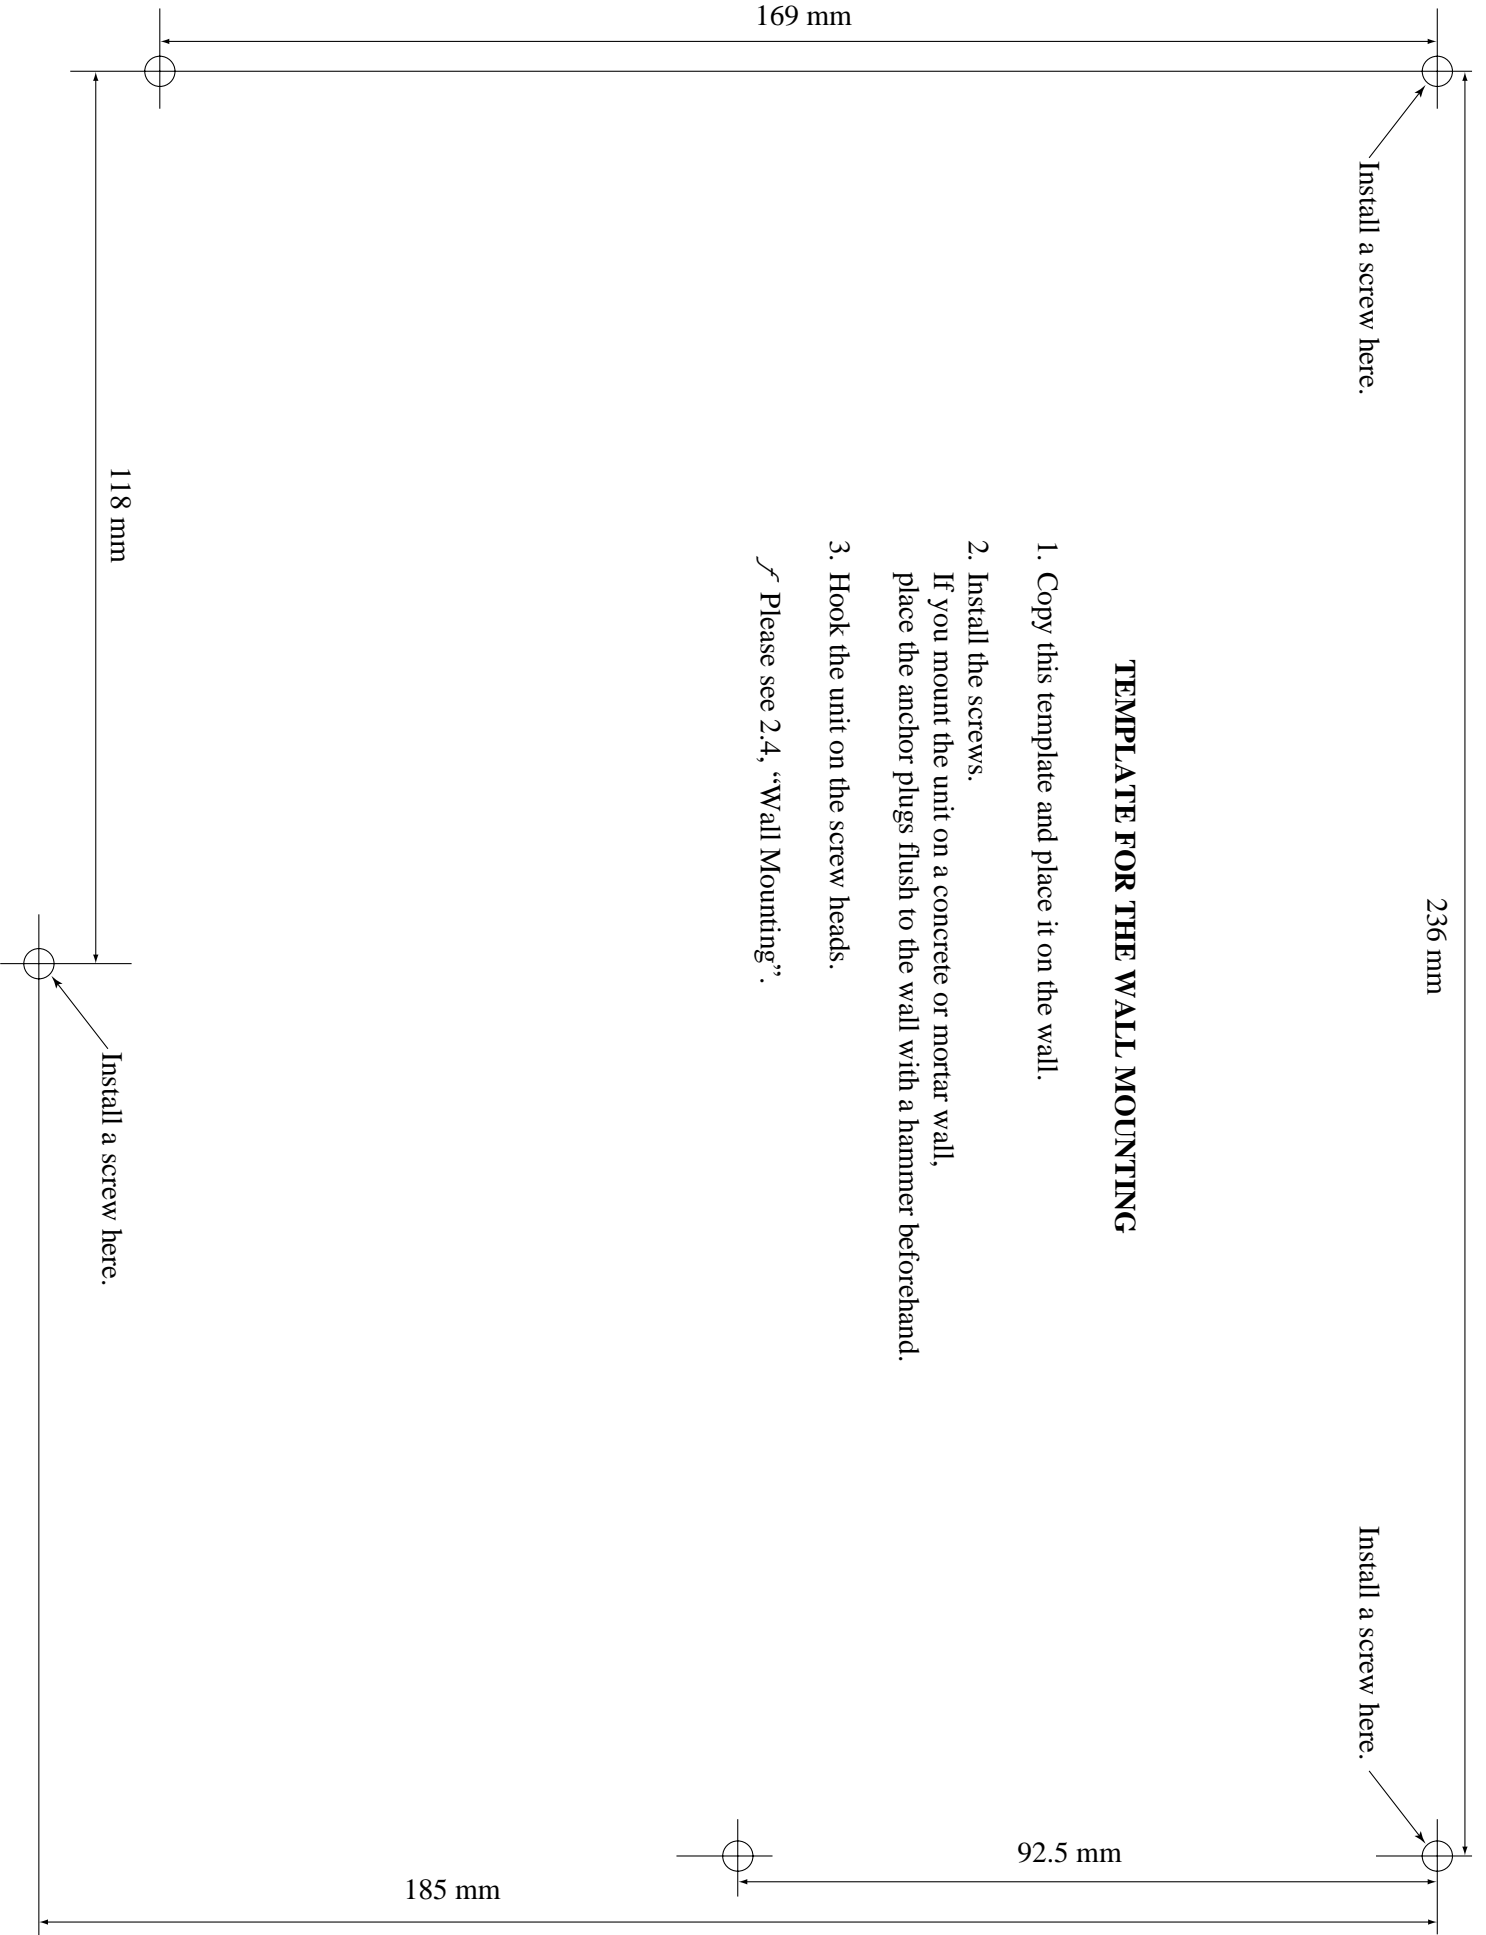

169 mm

Install a screw here.

236 mm

Install a screw here.

92.5 mm

185 mm

118 mm

Install a screw here.

### TEMPLATE FOR THE WALL MOUNTING

1. Copy this template and place it on the wall.
  2. Install the screws.  
If you mount the unit on a concrete or mortar wall, place the anchor plugs flush to the wall with a hammer beforehand.
  3. Hook the unit on the screw heads.
- ⚠ Please see 2.4, "Wall Mounting".*

**Copyright:**

This manual is copyrighted by Kyushu Matsushita Electric Co., Ltd. (KME). Under the copyright laws, this manual may not be reproduced in any form, in whole or part, without the prior written consent of KME and its licensee.

© Kyushu Matsushita Electric Co., Ltd. 1999

**Panasonic Business Systems U.K.**

Panasonic House, Willoughby Road, Bracknell, Berkshire RG12 8FP