

FXL Fan Assisted Storage Heaters

FXL 18 / FXL 24



Product Description

Storage heater with fully automatic charge regulator and fan assisted heat discharge

Key Features

- Fully automatic charging system
- 2 ½ times more insulation than conventional storage heaters
- Thermostatically controlled fan ensures heat is extracted only as and when required
- Results in better comfort, more evenly controlled room temperatures and improved running economy

Technical Specification

Controls

Manually adjustable room thermostat
Boost on/off rocker switch

Storage Core

High density bonded magnetite bricks

Storage Elements

0.85 kW

Direct Acting Heater

Integral fan with boost elements

Insulation

Front and rear: microporous silica
Top and ends: resin-free mineral wool

Core Extractor Fan

Centrifugal

Input Charge Controller

Fully automatic pre-set

Thermal Cut Out

Bimetal, manual reset

Colour/Finish

Willow White
Wall spacer: Birch Grey

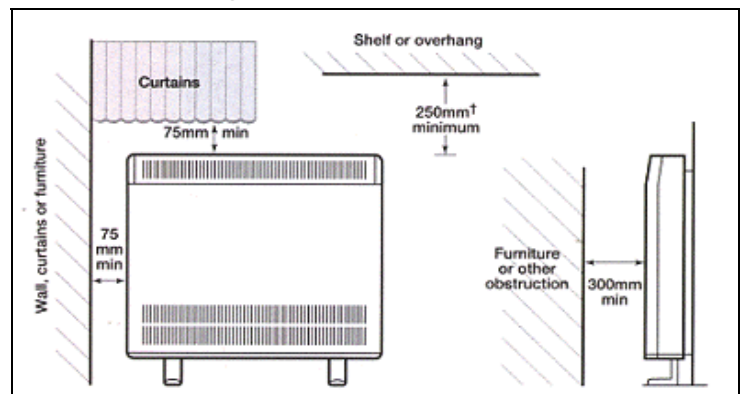
Cable Length

None fitted

Standard Warranty

12 months

Product Range Details


FXL18
FXL24
Performance

Input rating (kW)	2.55	3.4
Charge acceptance(7hr) (kW)	17.85	23.8
No Elements (0.85kW)	3	4
Direct Acting Loading (kW)	1.5	1.5
Dimensions		
Height (mm)	700	700
Width (mm)	788	1016
Depth (mm)	183	183
Weight (incl. bricks) (kg)	120	157
Packed weight (kg)	26	32

Additional Information

Storage Bricks

Packed separately in pairs – approx weight 7.5kg each

† - When using Dimplex shelves a clearance of 150mm must be maintained

Accessories

SHE18/24 – Storage Heater Shelves