

ENTERVIEW 5

The complete video door entry system



Enterview 5

Mono Video door entry system

The Enterview 5 provides crisp mono images combined with clear sound. Bright white LED illumination from the weatherproof, vandal resistant camera aids identification in darkness. The system can be extended by adding up to 3 additional mono video handsets, 2 additional audio only handsets and one additional camera external call point.

- Clear high resolution mono picture on 4" monitor
- Up to 3 additional monitors per system
- Up to 2 additional audio handsets per system
- Up to 2 camera call points per system
- Door release activation button
- Two camera input
- Simple 4 core cable installation
- Supplied with remote 12V power supply

Optional Accessories

EV5CAM - Mono Camera

- Mono outdoor camera
- LED illumination
- 1 additional camera per system



EV5KPCAM - Mono Camera Keypad

- Mono outdoor camera with keypad
- LED illumination
- 1 additional camera per system



EVH5 - Mono Handset

- High resolution mono 4" monitor
- Door release button
- Up to three additional per system



EVH5A0 - Audio only handset

- Clear high quality audio
- Integral lock release activation (lock release is optional extra)
- Up to two per system



EV-BPS - Boxed power supply for use with lock release

- 240vAC input
- 2A 12vDC fail safe output
- 1A 12vDC fail secure output
- 500ma 12vDC auxiliary output



EV-ML-250 - Electromagnetic Lock

- Holding force 250kg/550lbs max
- 420ma 12vdc input
- Z & L mounting bracket included
- NB. Requires EV-BPS power supply



ENTERD - Electromagnetic Lock

- Holding force 295kg/650lbs
- 160ma 12vdc input
- For use with Yale type rim locks
- Surface mounting version available
- NB. Requires EV-BPS power supply



EV-EXIT - Push to Exit Lock release button

- Stainless steel fascia
- Flush mounting (back box included)
- Push to make contacts



EV-EBG - Emergency Break Glass

- Surface mounted
- Emergency break glass to release door



MONITOR

Power	14.5VDC Direct from PSU
Installation	Surface Mounted
Operating Temp	Minus 10 - Plus 55°C
Consumption	800mA / 14.5DC
Dimensions Surface	205(W) x 220(H) x 55(D)mm
Net Weight	875g

CAMERA

Image sensor	1/3" B/W CCD
Min Illumination	0.8 LUX
Illumination	White LED 4 pcs
Lens	LG/3.6mm
IRIS system	Electronic automatic
Viewing angle	Horizontal 70° Vertical 50°
Voice transmission	Full duplex speech
Power source	DC 15V (+ 1V) from Monitor
Assurance temp.	-10°C~+50°C (14°F-122°F)
Cabinet	Vandal resistant metal
Weight	296g
Dimensions Surface	56(W) x 133(H) x 40(D)mm



MONITOR

Power	14.5VDC Direct from PSU
Installation	Surface Mounted
Operating Temp	Minus 10 - Plus 55°C
Consumption	800mA / 14.5DC
Dimensions Surface	205(W) x 220(H) x 55(D)mm
Net Weight	875g

CAMERA

Image sensor	1/3" Colour CCD
Min Illumination	1 LUX
Illumination	White LED 4 pcs
Lens	LG/3.6mm
IRIS system	Electronic automatic
Viewing angle	Horizontal 70° Vertical 50°
Voice transmission	Full duplex speech
Power source	DC 15V (+ 1V) from Monitor
Assurance temp.	-10°C~+50°C (14°F-122°F)
Cabinet	Vandal resistant metal
Weight	296g
Dimensions Surface	56(W) x 133(H) x 40(D)mm

Interview 5C

Colour Video door entry system

The Interview 5 provides crisp colour images combined with clear sound. Bright white LED illumination from the weatherproof, vandal resistant camera aids identification in darkness. The system can be extended by adding up to 3 additional mono video handsets, 2 additional audio only handsets and one additional camera external call point.

- Clear high resolution colour picture on 4" monitor
- Up to 3 additional monitors per system
- Up to 2 additional audio handsets per system
- Up to 2 camera call points per system
- Door release button
- Two camera input
- Simple 4 core cable installation
- Supplied with remote 12V power supply

Optional Accessories

EV5CCAM - Colour Camera

- Colour outdoor camera
- LED illumination
- 1 additional camera per system



EV5CKPCAM - Colour Camera Keypad

- Colour outdoor camera with keypad
- LED illumination
- 1 additional camera per system



EVH5C - Colour Handset

- High resolution colour 4" monitor
- Door release button
- Up to three additional per system



EVH5A0 - Audio only handset

- Clear high quality audio
- Integral lock release activation (lock release is optional extra)
- Up to two per system



EV-BPS - Boxed power supply for use with lock release

- 240vAC input
- 2A 12vDC fail safe output
- 1A 12vDC fail secure output
- 500ma 12vDC auxiliary output



EV-ML-250 - Electromagnetic Lock

- Holding force 250kg/550lbs max
- 420ma 12vdc input
- Z & L mounting bracket included
- NB. Requires EV-BPS power supply



ENTERD - Electromagnetic Lock

- Holding force 295kg/650lbs
- 160ma 12vdc input
- For use with Yale type rim locks
- Surface mounting version available
- NB. Requires EV-BPS power supply



EV-EXIT - Push to Exit Lock release button

- Stainless steel fascia
- Flush mounting (back box included)
- Push to make contacts



EV-EBG - Emergency Break Glass

- Surface mounted
- Emergency break glass to release door



Enterview 5KP

Mono Video door entry system

All the features of the Enterview 5 combined with a robust access control keypad. Regular visitors/staff can be issued with a code to allow self-access to the protected building. Simple programming of the self contained keypad to allow regular code changes, if required. Bright illumination of callers and backlit keypad for night-time use. The system can be extended by adding up to 3 additional mono video handsets, 2 additional audio only handsets, 2 additional camera call points per system and one additional camera external call point.

- Clear high resolution mono picture on 4" monitor
- Up to 3 additional monitors per system
- Up to 2 additional audio handsets per system
- Up to 2 camera call points per system
- Door release activation button
- Two camera input
- Simple 4 core cable installation
- Supplied with remote 12V power supply

Optional Accessories

EV5CAM - Mono Camera

- Mono outdoor camera
- LED illumination
- 1 additional camera per system



EV5KPCAM - Mono Camera Keypad

- Mono outdoor camera with keypad
- LED illumination
- 1 additional camera per system



EVH5 - Mono Handset

- High resolution mono 4" monitor
- Door release button
- Up to three additional per system



EVH5A0 - Audio only handset

- Clear high quality audio
- Integral lock release activation (lock release is optional extra)
- Up to two per system



EV-BPS - Boxed power supply for use with lock release

- 240vAC input
- 2A 12vDC fail safe output
- 1A 12vDC fail secure output
- 500ma 12vDC auxiliary output



EV-ML-250 - Electromagnetic Lock

- Holding force 250kg/550lbs max
- 420ma 12vdc input
- Z & L mounting bracket included
- NB. Requires EV-BPS power supply



ENTERD - Electromagnetic Lock

- Holding force 295kg/650lbs
- 160ma 12vdc input
- For use with Yale type rim locks
- Surface mounting version available
- NB. Requires EV-BPS power supply



EV-EXIT - Push to Exit Lock release button

- Stainless steel fascia
- Flush mounting (back box included)
- Push to make contacts



EV-EBG - Emergency Break Glass

- Surface mounted
- Emergency break glass to release door



MONITOR

Power	14.5VDC Direct from PSU
Installation	Surface Mounted
Operating Temp	Minus 10 - Plus 55°C
Consumption	800mA / 14.5DC
Dimensions Surface	205(W) x 220(H) x 55(D)mm
Net Weight	875g

CAMERA

Image sensor	1/3" B/W CCD
Min Illumination	0.8 LUX
Illumination	LED
Lens	LG/3.6mm
IRIS system	Electronic automatic
Camera Angle	Adjustable
Viewing angle	Horizontal 70° Vertical 50°
Voice transmission	Simultaneous conversion via speaker
Power source	DC 15V (+ 1V) from Monitor
Assurance temp.	-10°C~+50°C (14°F~122°F)
Cabinet	Plastic/Metal
Weight	686g
Dimensions Surface	74(W) x 182(H) x 59(D)mm

Enterview 5CKP

Colour Video door entry system

All the features of the Enterview 5C combined with a robust access control keypad. Regular visitors/staff can be issued with a code to allow self-access to the protected building. Simple programming of the self contained keypad to allow regular code changes, if required. Bright illumination of callers and backlit keypad for night-time use. The system can be extended by adding up to 3 additional mono video handsets, 2 additional audio only handsets and one additional camera external call point.

- Clear high resolution colour picture on 4" monitor
- Up to 3 additional monitors per system
- Up to 2 additional audio handsets per system
- Up to 2 camera call points per system
- Door release activation button
- Two camera input
- Simple 4 core cable installation
- Supplied with remote 12V power supply

Optional Accessories

EV5CCAM - Colour Camera

- Colour outdoor camera
- LED illumination
- 1 additional camera per system



EV5CKPCAM - Colour Camera Keypad

- Colour outdoor camera with keypad
- LED illumination
- 1 additional camera per system



EVH5C - Colour Handset

- High resolution colour 4" monitor
- Door release button
- Up to three additional per system



EVH5A0 - Audio only handset

- Clear high quality audio
- Integral lock release activation (lock release is optional extra)
- Up to two per system



EV-BPS - Boxed power supply for use with lock release

- 240vAC input
- 2A 12vDC fail safe output
- 1A 12vDC fail secure output
- 500ma 12vDC auxiliary output



EV-ML-250 - Electromagnetic Lock

- Holding force 250kg/550lbs max
- 420ma 12vdc input
- Z & L mounting bracket included
- NB. Requires EV-BPS power supply



ENTERD - Electromagnetic Lock

- Holding force 295kg/650lbs
- 160ma 12vdc input
- For use with Yale type rim locks
- Surface mounting version available
- NB. Requires EV-BPS power supply



EV-EXIT - Push to Exit Lock release button

- Stainless steel fascia
- Flush mounting (back box included)
- Push to make contacts



EV-EBG - Emergency Break Glass

- Surface mounted
- Emergency break glass to release door



MONITOR

Power	14.5VDC Direct from PSU
Installation	Surface Mounted
Operating Temp	Minus 10 - Plus 55°C
Consumption	800mA / 14.5DC
Dimensions Surface	205(W) x 220(H) x 55(D)mm
Net Weight	875g

CAMERA

Image sensor	1/3" Colour CCD
Min Illumination	1 LUX
Illumination	LED
Lens	LG/3.6mm
IRIS system	Electronic automatic
Camera Angle	Adjustable
Viewing angle	Horizontal 70° Vertical 50°
Voice transmission	Simultaneous conversion via speaker
Power source	DC 15V (+ 1V) from Monitor
Assurance temp.	-10°C~+50°C (14°F~122°F)
Cabinet	Plastic/Metal
Weight	686g
Dimensions Surface	74(W) x 182(H) x 59(D)mm

Enterview 5C-HF

Colour Video door entry system

The Enterview 5C-HF provides crisp colour images combined with clear sound utilising latest hands free technology. Bright white LED illumination from the weatherproof, vandal resistant camera aids identification in darkness. The system can be extended by adding up to 3 additional colour video handsets, 2 additional audio only handsets and one additional camera external call point.

- Clear high resolution colour picture on 7" hands free TFT monitor
- Up to three additional monitors per system
- Up to two additional audio only handsets per video handset
- Door release button
- Two camera input
- Simple 4 core cable installation

Optional Accessories

EV5CCAM - Colour Camera

- Colour outdoor camera
- LED illumination
- 1 additional camera per system



EV5CKPCAM - Colour Camera Keypad

- Colour outdoor camera with keypad
- LED illumination
- 1 additional camera per system



EVH5C-HF - Colour Handset

- High resolution colour 7" TFT monitor
- Door release button
- Up to three additional per system



EVH5A0 - Audio only handset

- Clear high quality audio
- Integral lock release activation (lock release is optional extra)
- Up to two per system



EV-BPS - Boxed power supply for use with lock release

- 240vAC input
- 2A 12vDC fail safe output
- 1A 12vDC fail secure output
- 500ma 12vDC auxiliary output



EV-ML-250 - Electromagnetic Lock

- Holding force 250kg/550lbs max
- 420ma 12vdc input
- Z & L mounting bracket included
- NB. Requires EV-BPS power supply



ENTERD - Electromagnetic Lock

- Holding force 295kg/650lbs
- 160ma 12vdc input
- For use with Yale type rim locks
- Surface mounting version available
- NB. Requires EV-BPS power supply



EV-EXIT - Push to Exit Lock release button

- Stainless steel fascia
- Flush mounting (back box included)
- Push to make contacts



EV-EBG - Emergency Break Glass

- Surface mounted
- Emergency break glass to release door



MONITOR

Power	14.5VDC Direct from PSU
Installation	Surface Mounted
Operating Temp	Minus 10 - Plus 55°C
Consumption	800mA / 14.5DC
Dimensions Surface	240(W) x 175(H) x 38(D)mm
Net Weight	594g

CAMERA

Image sensor	1/3" Colour CCD
Min Illumination	1 LUX
Illumination	White LED 4 pcs
Lens	LG/3.6mm
IRIS system	Electronic automatic
Viewing angle	Horizontal 70° Vertical 50°
Voice transmission	Full duplex speech
Power source	DC 15V (+ 1V) from Monitor
Assurance temp.	-10°C~+50°C (14°F-122°F)
Cabinet	Vandal resistant metal
Weight	296g
Dimensions Surface	56(W) x 133(H) x 40(D)mm



Enterview 5CKP-HF

Colour Video door entry system

All the features of the Enterview 5C-HF combined with a robust access control keypad. Regular visitors/staff can be issued with a code to allow self-access to the protected building. Simple programming of the self contained keypad to allow regular code changes, if required. Bright illumination of callers and backlit keypad for night-time use. The system can be extended by adding up to 3 additional mono video handsets, 2 additional audio only handsets and one additional camera external call point.

- Clear high resolution colour picture on 7" hands free TFT monitor
- Up to three additional monitors per system
- Up to two additional audio only handsets per video handset
- Door release button
- Two camera input
- Simple 4 core cable installation

Optional Accessories

EV5CCAM - Colour Camera

- Colour outdoor camera
- LED illumination
- 1 additional camera per system



EV5CKPCAM - Colour Camera Keypad

- Colour outdoor camera with keypad
- LED illumination
- 1 additional camera per system



EVH5C-HF - Colour Handset

- High resolution colour 7" TFT monitor
- Door release button
- Up to three additional per system



EVH5A0 - Audio only handset

- Clear high quality audio
- Integral lock release activation (lock release is optional extra)
- Up to two per system



EV-BPS - Boxed power supply for use with lock release

- 240vAC input
- 2A 12vDC fail safe output
- 1A 12vDC fail secure output
- 500ma 12vDC auxiliary output



EV-ML-250 - Electromagnetic Lock

- Holding force 250kg/550lbs max
- 420ma 12vdc input
- Z & L mounting bracket included
- NB. Requires EV-BPS power supply



ENTERD - Electromagnetic Lock

- Holding force 295kg/650lbs
- 160ma 12vdc input
- For use with Yale type rim locks
- Surface mounting version available
- NB. Requires EV-BPS power supply



EV-EXIT - Push to Exit Lock release button

- Stainless steel fascia
- Flush mounting (back box included)
- Push to make contacts



EV-EBG - Emergency Break Glass

- Surface mounted
- Emergency break glass to release door



MONITOR


Power	14.5VDC Direct from PSU
Installation	Surface Mounted
Operating Temp	Minus 10 - Plus 55°C
Consumption	800mA / 14.5DC
Dimensions Surface	240(W) x 175(H) x 38(D)mm
Net Weight	594g

CAMERA

Image sensor	1/3" Colour CCD
Min Illumination	1 LUX
Illumination	LED
Lens	LG/3.6mm
IRIS system	Electronic automatic
Camera Angle	Adjustable
Viewing angle	Horizontal 70° Vertical 50°
Voice transmission	Simultaneous conversion via speaker
Power source	DC 15V (+ 1V) from Monitor
Assurance temp.	-10°C~+50°C (14°F~122°F)
Cabinet	Plastic/Metal
Weight	686g
Dimensions Surface	74(W) x 182(H) x 59(D)mm



Example layout for maximum system configuration

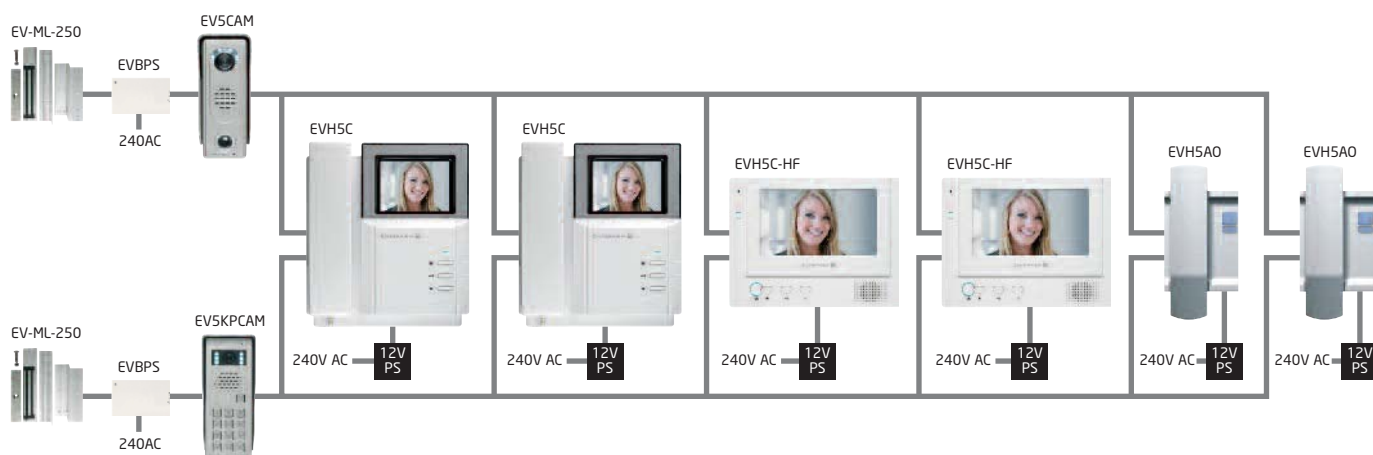

NB. EVBPS only required when lock release included

Interview 5 Product Codes

INTERVIEW 5 ONE STATION KITS

SYSTEMS NOT SUPPLIED WITH DOOR RELEASE - EVBPS REQUIRED ONLY WHEN USING DOOR RELEASE

EV5	MONOCHROME VIDEO door ENTRY SYSTEM C/W 12VDC TRANSFORMER
EV5KP	MONOCHROME VIDEO door ENTRY SYSTEM C/W KEYPAD AND 12VDC TRANSFORMER
EV5C	COLOUR VIDEO door ENTRY SYSTEM C/W 12VDC TRANSFORMER
EV5CKP	COLOUR VIDEO door ENTRY SYSTEM C/W KEYPAD AND 12VDC TRANSFORMER

INTERVIEW 5 HANDSFREE

SYSTEMS NOT SUPPLIED WITH DOOR RELEASE - EVBPS REQUIRED ONLY WHEN USING DOOR RELEASE

EV5C-HF	COLOUR HANDSFREE VIDEO door ENTRY SYSTEM C/W 12VDC TRANSFORMER
EV5CKP-HF	COLOUR HANDSFREE VIDEO door ENTRY SYSTEM C/W KEYPAD AND 12VDC TRANSFORMER

INTERVIEW 5 SLAVE MONITOR'S

MAX 4 PER SYSTEM

EVH5	MONOCHROME master / slave VIDEO HANDSET, 2 camera connection
EVH5C	COLOUR master / slave VIDEO HANDSET, 2 camera connection
EVH5C-HF	COLOUR HANDSFREE master / slave VIDEO HANDSET, 2 camera connection
EVH5AO	AUDIO only slave handset

INTERVIEW 5 CAMERAS

MAX 2 PER SYSTEM

EV5CAM	MONO CAMERA (Standard)
EV5KPCAM	MONO CAMERA (Keypad version)
EV5CCAM	COLOUR CAMERA (Standard)
EV5CKPCAM	COLOUR CAMERA (Keypad version)

ACCESSORIES TO BE USED WITH INTERVIEW 5

BOXED POWER SUPPLY / DOOR STRIKE

EVBPS	12vDC 2AMP multi output BOXED POWER SUPPLY
ENTERD	12VDC FLUSH MOUNT DOOR STIKE
ENTERD-FP	RIM FACEPLATE for ENTERD
EVML-250	250kg MAG LOCK c/w LZ bracket
EVML-250-MON	MAGLOCK c/w Z&L bracket set, 250KG c/w monitoring
EXIT BUTTON	
EVEXIT	12vDC EXIT BUTTON for use with INTERVIEW4 RANGE
EVEBG	SURFACE mounting green call point "EMERGENCY DOOR REALEASE"

Elite Security Products
Unit 7, Target Park, Shawbank Road
Lakeside, Redditch B98 8YN



Telephone: 01527 515150
Technical Support: 01527 515145
email: info@espuk.com