

## Double-Sided Foam Tape

### EVA Foam Tape




**Materials:**

- Polyethylene foam coated on both sides with adhesive.
- Coated with pressure sensitive acrylic adhesive.

**Features:**

- Used to bond a wide variety of surfaces including wood, metal and plastics.
- Primarily used to create a bond between two dissimilar surfaces.

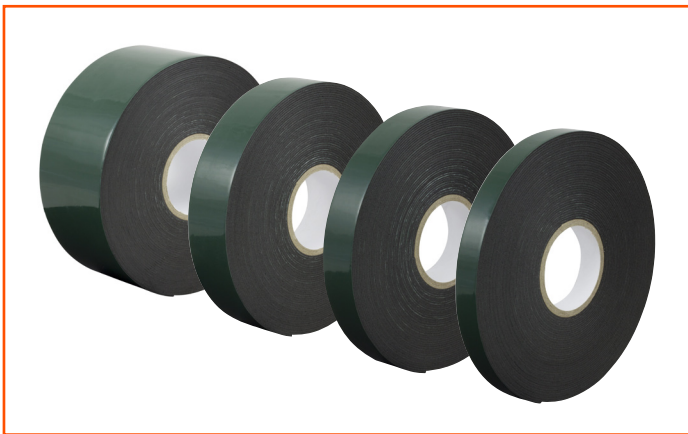

**Technical Data**

Property	Value
Total Thickness	1.1mm (±0.2)
Foam Thickness	1mm (±0.2)
Release Paper	0.1mm
Adhesive	Acrylic
Tensile Strength	> 12 N/cm
Adhesive to Steel	≥ 4.7 N/cm
Roll Back Tack	> 12 (ball no.)
Holding Power	≥ 1 KG/24 hours
Temperature Rating	-15°C to +80°C

Item No.	Colour	Width (mm)	Length (m)	Thickness (mm)
DSFT12X10-B	Black	12	10	1.1
DSFT19X10-B	Black	19	10	1.1
DSFT25X10-B	Black	25	10	1.1
DSFT50X10-B	Black	50	10	1.1

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. KrimpTerm cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the tapes suitability for their own applications.