

Self Amalgamating Tape

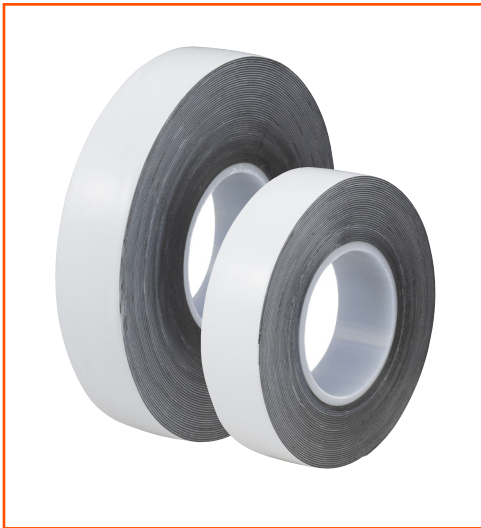
Primary Insulation Tape

**• Material:**

• Ethylene propylene rubber.

• Features:

- Tape which amalgamates with itself when applied under tension.
- Primarily used for waterproofing, corrosion protection, jointing and repair of cables.
- UV, moisture and chemical resistant.

**Technical Data**

Property	Value
Total Thickness	0.50mm (±0.01)
Elongation	685%
Tensile Strength	4.73 Mpa
Dielectric Strength	25 kV/mm
Temperature Rating	90°C
Temperature Overload	130°C
UV & Ozone Resistance	Pass

Item No.	Colour	W (mm)	L (m)	Thickness (mm)
SAM19X5-BLA	Black	19	5	0.5
SAM19X10-BLA	Black	19	10	0.5
SAM19X10-BLA	Black	25	10	0.5

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application.
The quoted values are average and should not be taken as maximum or minimum values for specific purposes.
KrimpTerm cannot be held responsible for product failure unless full testing has been carried out.
The user has to decide on the tapes suitability for their own applications.