


3 Speed settings Oscillation function Adjustable head Remote control

IMPORTANT Installer and Users please note:

These instructions should be read carefully and left with the user of the product for future reference.

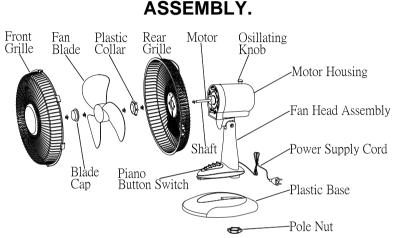

Hold the fan by the head assembly and remove the pole nut. Place the head assembly in the base, and press firmly into position. The replace the pole nut.

Unscrew the plastic nut from the motor housing. Locate the rear guard on the motor housing - the two holes in the guard align with the two round pegs on the motor housing. Push the guard firmly into place and secure with the plastic nut.

Insert the motor shaft through the blades, aligning the pin on the motor shaft with the slot on the back of the blades. Secure the blades in place with the spinner. Rotate anticlockwise to tighten - it has a left-handed thread.

Check that the blades are free to rotate.

Attach the front guard to the rear guard using the clips built into the front guard.

Using a screwdriver, secure the two parts of the guard together with the screw and nut provided.

OPERATION

• Plug the mains lead into a 13 Amp mains socket.

• If connecting via an extension lead, make sure that the lead is rated at 3 Amps or more, and that it is fully unwound.

- Switch the appliance on at the mains socket.
- Turn the rotary switch to the speed required:

Low Speed = $840 \text{ m}^3/\text{h}$ airflow Medium Speed = $900 \text{ m}^3/\text{h}$ airflow High Speed = $960 \text{ m}^3/\text{h}$ airflow

• Oscillation is selected by pressing the oscillation knob downwards (see diagram on page 2), and switched off by pulling it upwards

- It is normal for the motor to become warm in normal use.
- Unplug the appliance from the mains when not in use.

OPERATING COSTS

At time of going to press, the average cost of electricity is $\pounds 0.11$ per unit (kilowatt-hour). The amount you are being charged will be shown on your electricity bill. At this cost, the EH0516 will cost 8p per day to run on the "low speed" setting, 10p per day on the "medium speed" setting or 12p per day to run on the "high speed" setting.

PRODUCT SAFETY

• This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

• Children should be supervised to ensure that they do not play with the appliance

- Do not use in close proximity to gas appliances
- Do not use unless correctly installed.
- Do not cover when in use.
- Do not place the mains lead beneath a carpet or rug.
- Do not use the appliance in locations where paint, petrol or other flammable liquids are used or stored.

• Do no insert any object into the appliance through the grilles. This may damage the appliance or result in overheating or electric shock.

• Do not use this appliance in the immediate surroundings of a bath, a shower or a swimming pool.

• The appliance is fitted with an overload cut-out which will operate if the motor overheats or is stalled. If this happens, disconnect from the mains supply immediately, and allow the motor to cool down.

PAT TESTING

When used in an office environment, this product must be safety-tested yearly by a qualified electrician (PAT Tested) in order to comply with the Electricity at Work Regulations.

We recommend that it is PAT tested regularly when used in a domestic environment.

GENERAL SAFETY REQUIREMENTS

Domestic wiring must be tested periodically by a qualified electrician at least once every 10 years or at every change of occupancy.

For office and retail premises, and buildings such as village halls, the wiring must be inspected at least once every 5 years.

It is recommended that all building be fitted with smoke alarms (it is mandatory for new buildings).

MAINTENANCE


Before cleaning, turn the appliance off, and disconnect from the mains supply. The appliance may then be cleaned using a damp cloth with a drop of washing-up liquid to remove any dust or dirt from the case. Do no use stronger detergents or solvents as these may damage the paint finish.

Using a dry 1" (25mm) paint-brush, remove any dust from the grilles.

If the mains lead is damaged, it must be replaced by the manufacturer or and authorised service centre.

If the mains plug needs to be replaced, proceed as follows:

• Connect the brown wire to the terminal labelled "L".



- Connect the blue wire to the terminal labelled "N".
 - Connect the green/yellow wire to the terminal labelled with the earth symbol or "E".

• Make sure that the cord-grip is positioned correctly (over the outer sheath of the cable) and it fully tightened.

DISPOSAL AND RECYCLING

You must not dispose of this appliance with domestic household waste.

Most local authorities have specific collection system for appliances and disposal is free of charge to the end-user.

When replacing an existing appliance with a similar new appliance your retailer may take the old appliance for disposal.

TECHNICAL SPECIFICATION

Dimensions:	500×345×270 mm
Weight:	2.1 kg
Power supply:	230V ~
Power consumption:	high speed: 40 W
	medium speed: 35 W
	low speed: 30 W
Air flow	high speed: 960 m ³ /h
	medium speed: 900 m ³ /h
	low speed: 840 m³/h
Operating current:	high speed: 0.175 A
	medium speed: 0.15 A
	low speed: 0.13 A

SERVICE WARRANTY

Prem-i-Air guarantees the product free from defects in materials and workmanship for a period of twelve months.

Should this appliance be operated under conditions other than those recommended, at voltages other than the voltage indicated on the appliance, or any attempts made to service or modify the appliance, then the warranty will be rendered void.

The product you buy may sometimes differ slightly from illustrations. This warranty is in addition to, and does not affect, your statutory rights.

If you have any problems with this product, please call our Help Desk on (0845) 459 4816.

Prem-i-Air Appliances Ltd., Lancots Lane, Sutton, St. Helens, Merseyside. WA9 3EX

website: www.prem-i-air.com